

## SPECIFICATIONS

Current rating : 3 Amps

Dielectric Withstanding : AC/DC 600V

Contact resistance : 20 Milliohms Max.

Insulation Resistance : 1000 Megohms Min.

Temperature range : - 40°C ~ + 105°C

## MATERIAL :

Terminal : Phosphor Bronze


## ORDER INFORMATION:


HFD1 - XX 2 - X0 - X - XX - X  
                   a   b   c       d   e   f   g

- a. Pin of numbers:   b. Pastic Thick :  
    04 ~ 60                   2: 6.8mm
- c. Plated selection:  
    0 : Tin plated  
    1 : Gold flash  
    2 : 5u" Gold on Contact Area  
    3 : 15u" Gold on Contact Area  
    4 : 30u" Gold on Contact Area  
    5 : Duplex Gold Flash on Contact Area  
    6 : Duplex 5u" Gold on Contact Area  
    7 : Duplex 15u" Gold on Contact Area  
    8 : Duplex 30u" Gold on Contact Area
- d. Solder Pin length :  
    1 : A=3.5mm
- e. Plastic Color :  
    B : black color
- f. Plastic material selection:  
    P : P.B.T (off料)  
    E : P.B.T (新料)
- g. Pack selection:  
    C : Contron Pack   D : Disk Pack  
    T : Tube Pack  
    R : Reel Pack




VERSION & EC DESCRIPTION

DATE	VERSION	PAGE	DESCRIPTION
2004/03/26	A	4-5	Add HFD1-XX2 Plan
2005/03/09	A	4-5	Add Pack : Contron 、 Tube 、 Reel

GENAL TOLERANCE	DRAW DATE	2004/03/26 H. D. LI	PART NO
X. ± 0.38	DESIGN	H. D. LI	HFD1-XX2-X0-X-XX-X
.X ± 0.25	CHECKED	Y. M. LU	TITLE
.XX ± 0.15	APPROVED	J. F. KANG	2.54 2xXX 母座 H=6.8 DIP 黑PBT
.XXX ± 0.10	UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO.,LTD.

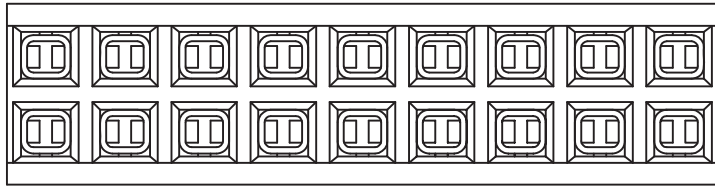

Recommended P.C.Board  
Hole Layout

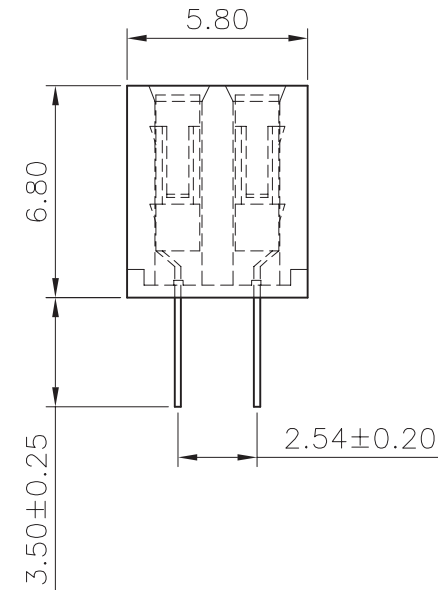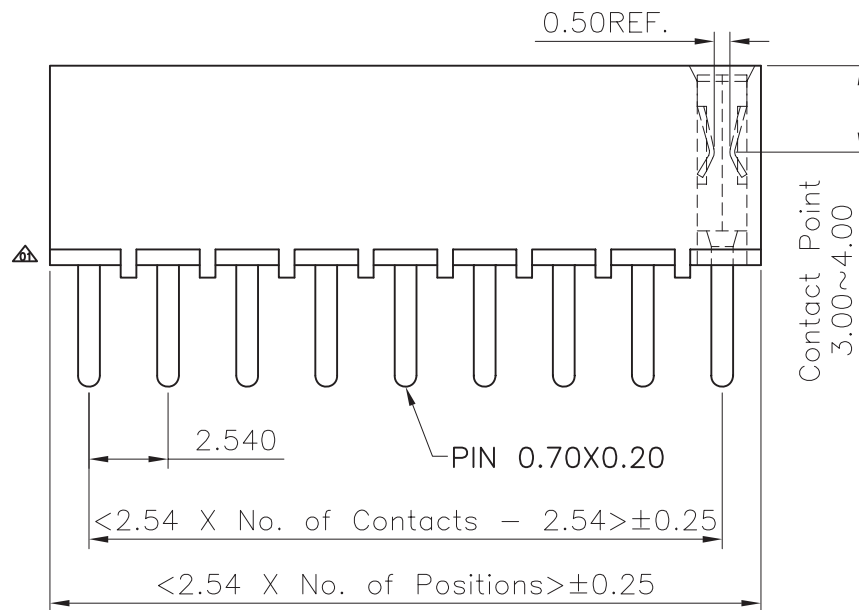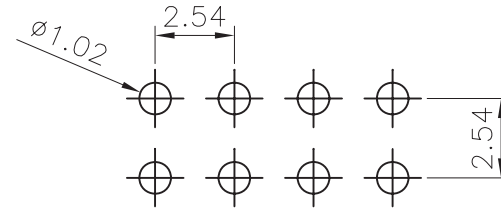

GENAL TOLERANCE	DRAW DATE	2004/03/26 H. D. LI	PART NO
X. ± 0.38	DESIGN	H. D. LI	HFD1-XX2-X0-X-XX-X
.X ± 0.25	CHECKED	Y. M. LU	TITLE
.XX ± 0.15	APPROVED	J. F. KANG	2.54 2xXX 母座 H=6.8 DIP 黑 PBT
.XXX ± 0.10	UNIT :mm		
			宏揚精密有限公司 HOJAR PRECISION CO., LTD.