

SPECIFICATIONS

Current rating : 3 Amp . Max ..

Dielectric Withstanding Voltage : 1000V AC RMS for 60Seconds

Contact resistance : 30m Ohms Max.

Insulation resistance : 1000M Ohms Min . At 1000V DC .

Temperature range : - 55°C ~ + 105°C

Housing : Thermoplastic(UL94V-0),Black


Terminal : Copper Alloy(t=0.40mm),Gold Plating



ORDER INFORMATION:HFD1 - XX 6 - X0 - X - XX - X
 a b c d e f g

- a. Pin of numbers: b. Plastic Thick :
04 ~ 80 6: 5.7mm
- c. Plated selection :
0 : Tin plated
1 : Gold flash
2 : 3u" Gold on Contact Area
3 : 5u" Gold on Contact Area
4 : 10u" Gold on Contact Area
5 : 15u" Gold on Contact Area
6 : 20u" Gold on Contact Area
7 : 30u" Gold on Contact Area
- d. Solder Pin length :
1 : L=2.85mm
- e. Plastic Color :
B : black color
- f. Plastic material selection:
P : P.B.T (off料)
E : P.B.T (新料)
N: NYLON6T
- g. Pack selection:
C : Contron Pack D : Disk Pack
T : Tube Pack
R : Reel Pack.



VERSION & EC DESCRIPTION

DATE	VERSION	PAGE	DESCRIPTION
2005/03/31	A	22-23	Add HFD1-XX5 Plan


GENAL TOLERANCE X. ± .X ± 0.30 .XX ± 0.20 .XXX ± 0.10	DRAW DATE 2005/03/31 H. D. LI	PART NO HFD1-XX6-X0-X-XX-X
	DESIGN H. D. LI	TITLE 2.54 母座 H=5.7 Vertical Type Dual Rows
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

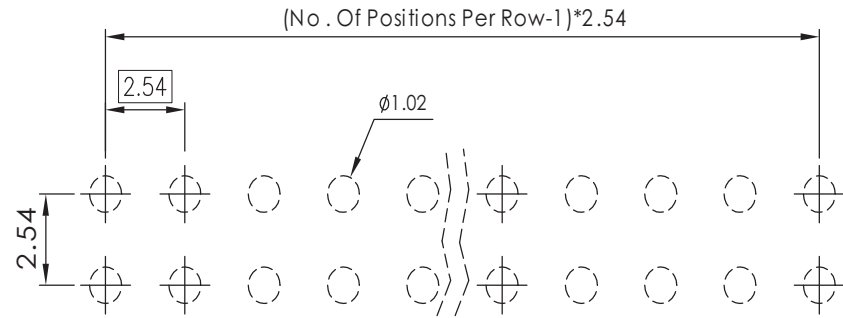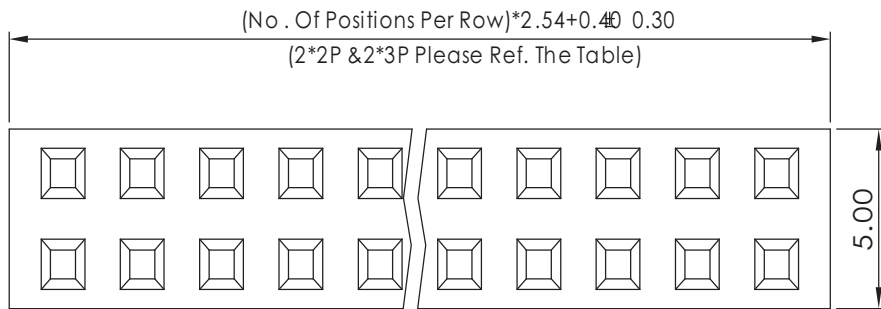

PCB Layout
(Top View)

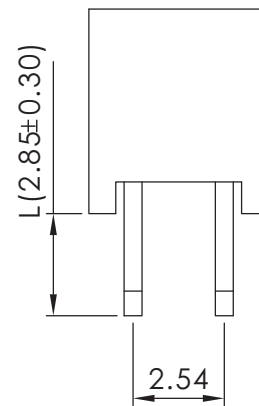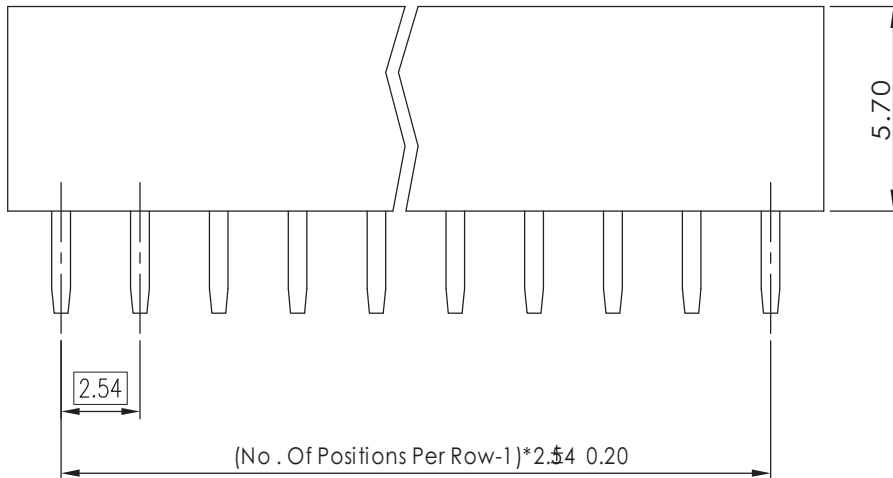

Dimensions	
Pos.	A
02	5.08
03	7.62

GENAL TOLERANCE X. ± .X ± 0.30 .XX ± 0.20 .XXX ± 0.10	DRAW 2005/03/31 DATE H. D. LI	PART NO HFD1-XX6-X0-X-XX-X	
	DESIGN H. D. LI		TITLE 2.54 母座 H=5.7 Vertical Type Dual Rows
	CHECKED Y. M. LU	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.
	UNIT :mm	(Empty)	