

SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40°C ~ +105°C

MATERIAL :

Housing : PBT

Terminal : Brass 65/35


ORDER INFORMATION:




HFS2 - $\frac{XX}{a} \frac{A}{b} - \frac{X0}{c} - \frac{X}{d} - \frac{XX}{e} - \frac{X}{g}$

- a. Pin of numbers :
03 ~ 40
- b. Plastic Base :
A : H=4.3mm(standard)
- c. Plated selection :
0 : Tin plated
1 : Gold flash
2 : 5u" Gold on Contact Area
3 : 15u" Gold on Contact Area
4 : 30u" Gold on Contact Area
5 : Duplex Gold flash on Contact Area
6 : Duplex 5u"Gold on Contact Area
7 : Duplex 15u"Gold on Contact Area
8 : Duplex 30u"Gold on Contact Area
- d. Solder Pin Length :
1 : A=2.4mm (Standard)
- e. Plastic Color :
W : white
B : black
- f. Plastic material selection: g. Pack Selection :
P : P.B.T (off料) C : Contron Pack
E : P.B.T (新料) T : Tube Pack
N : Nylon 9T D : Disk Pack


VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2004/08/12	A	4-5	Add HFS2-XXA Series Plan
2005/02/22	A	4	Add Pack : Contron & Tube & Disk

GENAL TOLERANCE	DRAW DATE	2004/08/12	PART NO
X. ± 0.50	H. D. LI		HFS2 - XXA - X0 - X - XX - X
.X ± 0.38	DESIGN	H. D. LI	TITLE
.XX ± 0.25	CHECKED	Y. M. LU	2.0 1xXX 母座 H=4.3 DIP 黑 NYLON
.XXX ± 0.15	APPROVED	J. F. KANG	
UNIT :mm			 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

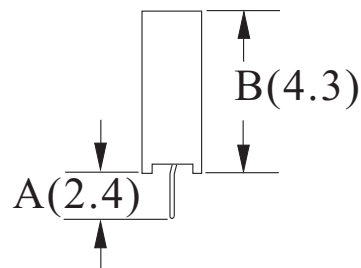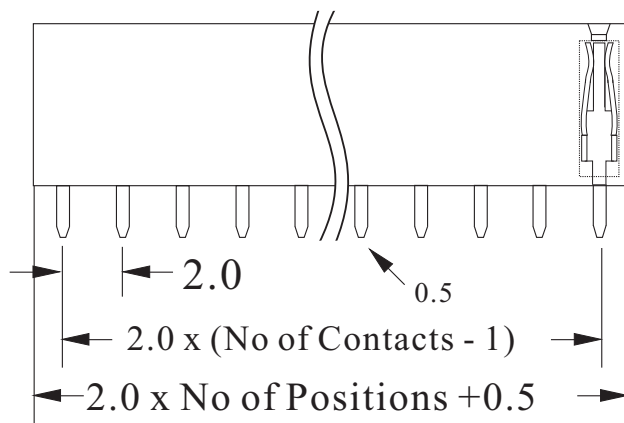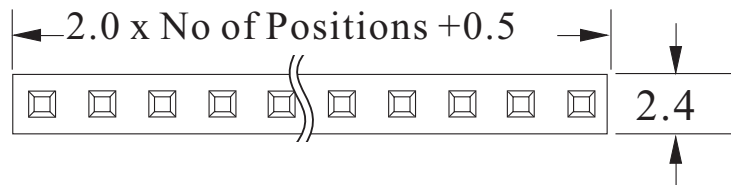

Recommended P.C.Board Hole Layout :

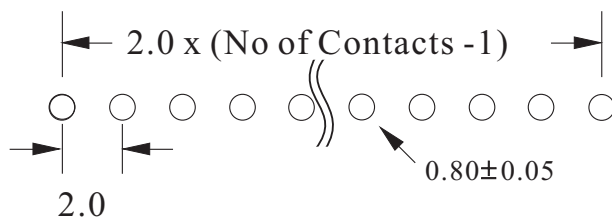

GENAL TOLERANCE	DRAW DATE	2004/08/12 H. D. LI	PART NO
X. ± 0.50	DESIGN	H. D. LI	HFS2 - XXA - X0 - X - XX - X
.X ± 0.38	CHECKED	Y. M. LU	TITLE
.XX ± 0.25	APPROVED	J. F. KANG	2.0 1xXX 母座 H=4.3 DIP 黑 NYLON
.XXX ± 0.15	UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.