

**SPECIFICATIONS**

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40° — +105°C

**MATERIAL :**

Housing : High Temperature Thermoplastic

Terminal : Brass 65/35(C2680)

**ORDER INFORMATION:**

$$\text{HBHR4} - \frac{\text{XX}}{\text{a}} 2 - \frac{\text{X0}}{\text{b}} - \frac{\text{X}}{\text{c}} - \frac{\text{X}}{\text{d}} \frac{\text{X}}{\text{f}} - \frac{\text{X}}{\text{g}}$$

a. Pin of numbers:

10 ~ 100

b 0 : Tin Plated

1 : Gold Flash

2 : Gold 5u"

3 : Gold 15u"

4 : Gold 30u"

c. Solder Pin Length:

if you desire on other length, by marking  
put desired length the B.

B=2.5mm(Standart)

d. Plastic Color :

W : white

B : black

f. Plastic Material

L:L.C.P

N:Nylon 6T

N9:Nylon 9T(E)


g. Pack Selection :


D : Disk Pack (standard)

R : Reel Pack


**VERSION & EC DESCRIPTION**

DATE	VERSION	PAGE	DESCRIPTION
2003/09/01	A	4-5	Add HBHR4-XX2 Series Plan
2004/03/26	B	4-5	Revise HBHR4-XX2 Series Plan
2004/08/12	B	4	Add Material : N1
2004/09/06	B	5	Add Post Plan
2004/12/24	B	5	Revise Material : N1 => N9
2005/02/22	B	5	Add Pack : Disk & Reel

GENERAL TOLERANCE X. ± 0.50 .X ± 0.38 .XX ± 0.25 .XXX ± 0.15	DRAW DATE 2003/09/01 H. D. LI	PART NO HBHR4-XX2-X0-X-XX-X
	DESIGN H. D. LI	TITLE Pitch:1.27x1.27mm Dual Row Box Header 90°Series
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.

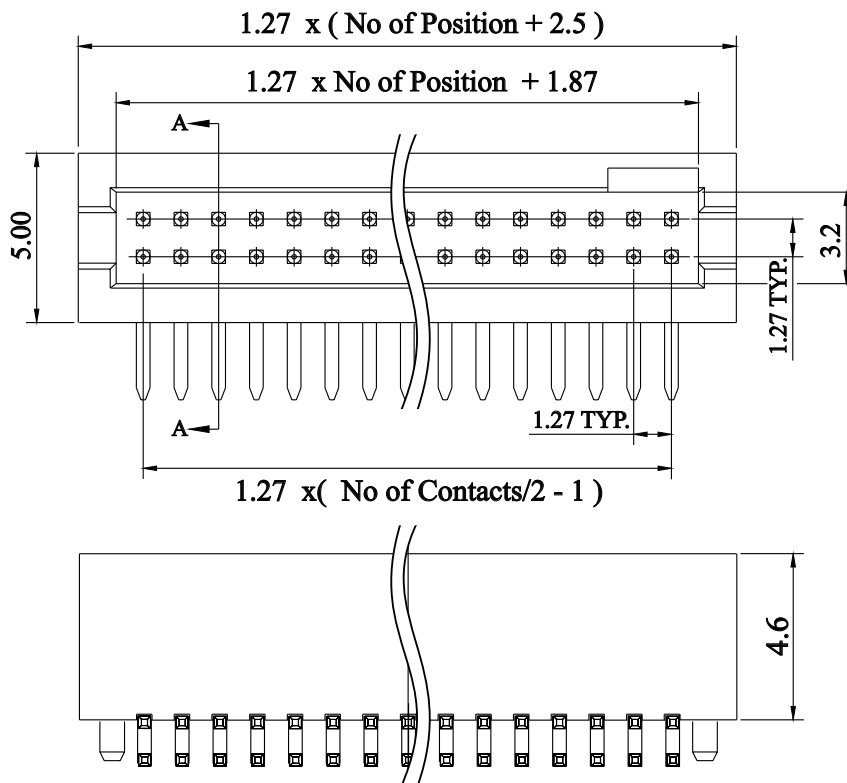

Recommended P.C.Board Hole Layout :

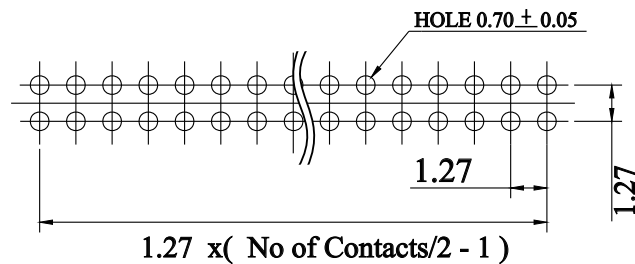

GENAL TOLERANCE	DRAW DATE	2003/09/01 H. D. LI	PART NO
X. $\pm 0.50$	DESIGN	H. D. LI	HBHR4-XX2-X0-X-XX-X
.X $\pm 0.38$	CHECKED	Y. M. LU	TITLE
.XX $\pm 0.25$	APPROVED	J. F. KANG	Pitch:1.27x1.27mm Dual Row Box Header 90°Series
.XXX $\pm 0.15$	UNIT :mm		
			宏揚精密有限公司 HOJAR PRECISION CO. : LTD.