

VERSION

B

Pitch 1.27mm Double Row Box Header DIP Series H=5.6mm 1/2

SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40° — +105°C

MATERIAL :

Housing : High Temperature Thermoplastic


Terminal : Brass 65/35(C2680)




ORDER INFORMATION:HBH4 - $\frac{XX}{a}$ $\frac{3}{b}$ - $\frac{X}{c}$ $\frac{0}{d}$ - $\frac{X}{e}$ $\frac{X}{f}$ $\frac{X}{g}$ - $\frac{X}{h}$

- a. Pin of numbers:
10 ~ 100
- b. Plastic Base:
3 : A=5.6mm
- c. Plated selection :
0 : Tin Plated
1 : Gold Flash
2 : Gold 5u"
3 : Gold 15u"
4 : Gold 30u"
- d. Post selection :
0 : Without Post
1 : Without Post + CAP
- e. Solder Pin Length:
if you desire on other length, by marking
put desired length the B.
B=2.3mm(standard)
- f. Plastic Color:
W : white
B : black
- g. Plastic Material
N : Nylon 6T
N9 : Nylon 9T(E)
- h. Pack Selection:
D : Disk Pack(standard)
R : Reel Pack
C : Contron Pack


VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2003/09/01	A	8-9	Add HBH4-XX3 Series Plan
2004/03/26	B	8-9	Revise HBH4-XX3 Series Plan
2004/08/12	B	8	Add Material : N1
2004/12/24	B	8	Revise Material : N1 => N9
2005/02/22	B	8	Add Pack : Disk & Reel

GENERAL TOLERANCE X. ± 0.50 .X ± 0.38 .XX ± 0.25 .XXX ± 0.15	DRAW DATE	2003/09/01 H. D. LI	PART NO HBH4-XX3-X0-X-XX-X
	DESIGN	H. D. LI	TITLE Pitch:1.27x1.27mm Dual Row Box Header Dip Type 180° H:5.6mm
	CHECKED	Y. M. LU	
	APPROVED	J. F. KANG	
UNIT :mm			 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.

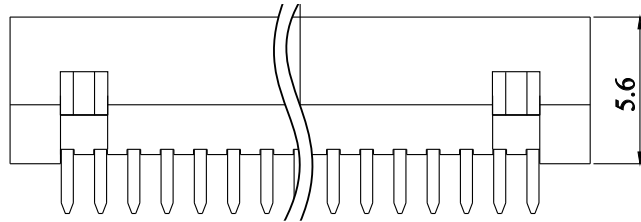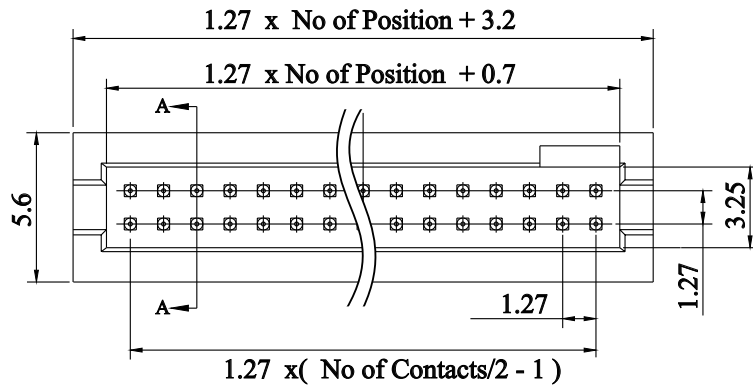

Recommended P.C.Board Hole Layout :

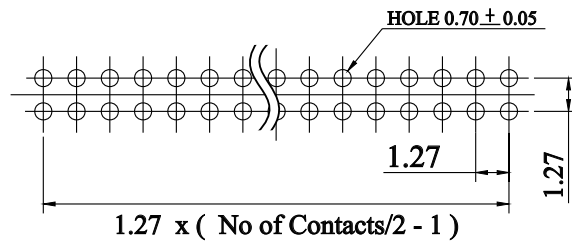

GENERAL TOLERANCE X. ± 0.50 .XX ± 0.38 .XXX ± 0.15	DRAW DATE	2003/09/01 H. D. LI	PART NO HBH4-XX3-X0-X-XX-X
	DESIGN	H. D. LI	TITLE Pitch:1.27x1.27mm Dual Row Box Header Dip Type 180° H:5.6mm
	CHECKED	Y. M. LU	
	APPROVED	J. F. KANG	
UNIT :mm			 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.