

## SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40° — +105°C

## MATERIAL :

Housing : High Temperature Thermoplastic

Terminal : Brass 65/35

## ORDER INFORMATION:

HBHR4 -  $\frac{XX}{a}$  3 -  $\frac{X0}{b}$  -  $\frac{X}{c}$  -  $\frac{XX}{d}$  -  $\frac{X}{f}$

a. Pin of numbers:

10 ~ 100

b. Plated selection :

0 : Tin Plated

1 : Gold Flash

2 : Gold 5u"

3 : Gold 15u"

4 : Gold 30u"

c. Solder Pin Length:

if you desire on other length, by marking put desired length the B.

B=2.5mm(Standart)

d. Plastic Color :

W : white

B : black

e. Plastic Material

L:L.C.P

N:Nylon 6T

N9:Nylon 9T(E)


f. Pack Selection :




D : Disk Pack (standard)

R : Reel Pack


### VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2003/09/01	A	10-11	Add HBHR4-XX3 Series Plan
2004/03/26	B	10-11	Revise HBHR4-XX3 Series Plan
2004/08/12	B	10	Add Material : N1
2004/09/06	B	11	Add Post Plan
2004/12/24	B	10	Revise Material : N1 => N9
2005/02/22	B	10	Add Pack : Disk & Reel

GENAL TOLERANCE	DRAW DATE	2003/09/01	PART NO
X. ± 0.50	H. D. LI		HBHR4-XX3-X0-X-XX-X
.X ± 0.38	DESIGN	H. D. LI	TITLE
.XX ± 0.25	CHECKED	Y. M. LU	Pitch:1.27x1.27mm Dual Row Box Header Dip Type 90° H:5.6mm
.XXX ± 0.15	APPROVED	J. F. KANG	
UNIT :mm			 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.

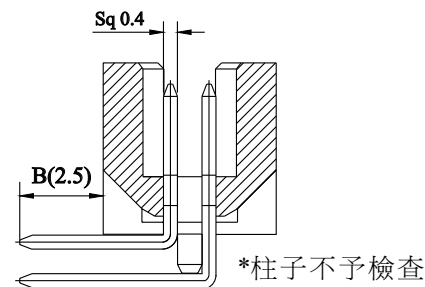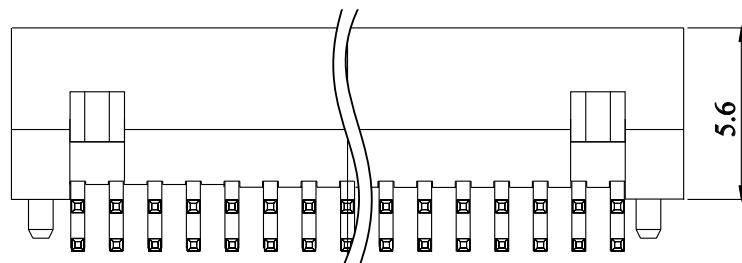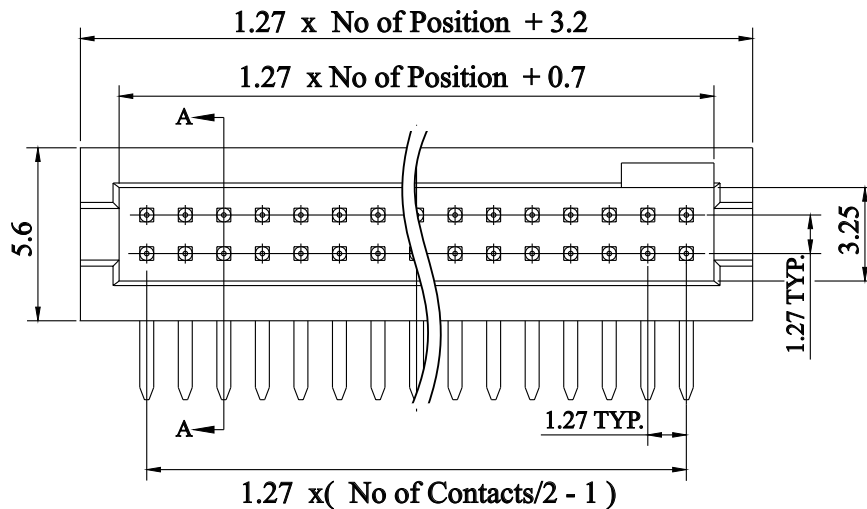

Recommended P.C.Board Hole Layout :

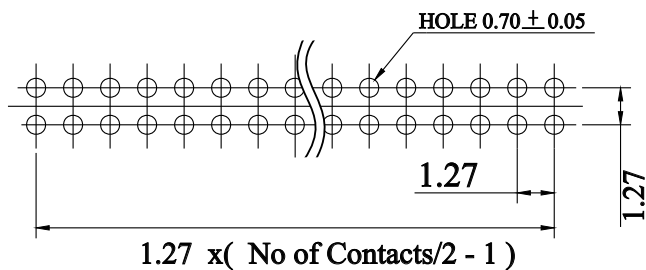

GENAL TOLERANCE X. ± 0.50 .X ± 0.38 .XX ± 0.25 .XXX ± 0.15	DRAW 2003/09/01 DATE H. D. LI	PART NO HBHR4-XX3-X0-X-XX-X
	DESIGN H. D. LI	TITLE Pitch:1.27x1.27mm Dual Row Box Header Dip Type 90° H:5.6mm
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.