

SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V

Operating Temperature : -40° — +105°C

MATERIAL :

Housing : High Temperature Thermoplastic

Terminal : Brass 65/35(C2680)

ORDER INFORMATION:

$$\text{SHBH4} - \frac{\text{XX}}{\text{a}} \frac{3}{\text{b}} - \frac{\text{X}}{\text{c}} \frac{\text{X}}{\text{d}} - \frac{\text{X}}{\text{e}} \frac{\text{X}}{\text{f}}$$

a. Pin of numbers:

10 ~ 100

b. Plated selection:

0 : Tin Plated

1 : Gold Flash

2 : Gold 5u" Gold

3 : Gold 15u" Gold

4 : Gold 30u" Gold

c. Option Post:

0 : None Post

1 : With Post

2 : None Post + Cap

3 : With Post + Cap

d. Plastic Color :

W : white

B : black

e. Plastic Material

L:L.C.P

N:Nylon 6T

N9:Nylon 9T(E)


f. Pack Selection :




D : Disk Pack (standard)

R : Reel Pack


VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2003/09/01	A	12-13	Add SHBH4-XX3 Series Plan
2004/03/26	B	12-13	Revise SHBH4-XX3 Series Plan
2004/08/12	B	12	Add Material : N1
2004/12/24	B	12	Revise Material : N1 => N9
2005/02/22	B	12	Add Pack : Disk & Reel
2005/05/16	B	12	Add Option Post : 2、3

GENERAL TOLERANCE	DRAW DATE	2003/09/01	PART NO
X. ± 0.50	DATE	H. D. LI	SHBH4-XX3-XX-XX-X
.X ± 0.38	DESIGN	H. D. LI	TITLE
.XX ± 0.25	CHECKED	Y. M. LU	Pitch:1.27x1.27mm Box Header SMD Type Series
.XXX ± 0.15	APPROVED	J. F. KANG	
UNIT :mm			 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.

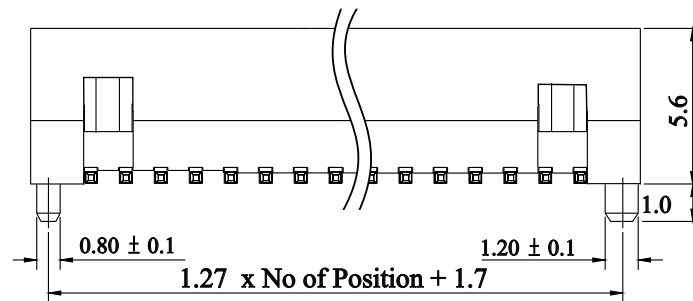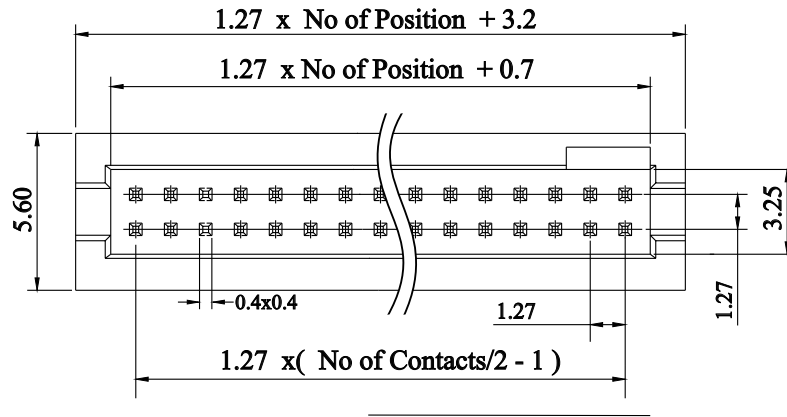

Recommended P.C.Board Hole Layout :

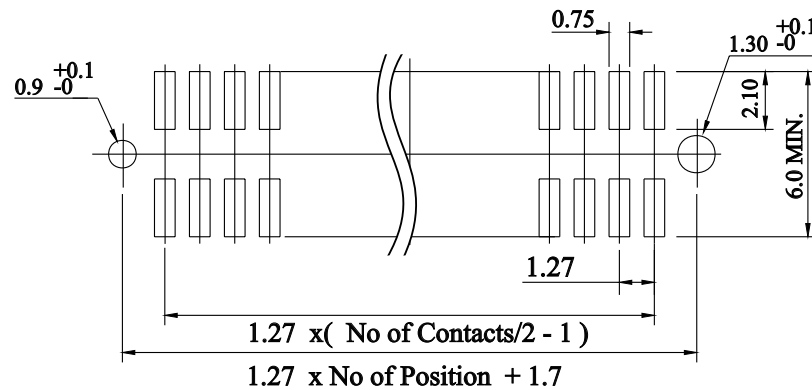

GENAL TOLERANCE X. ± 0.50 .X ± 0.38 .XX ± 0.25 .XXX ± 0.15	DRAW 2003/09/01 DATE H. D. LI	PART NO SHBH4-XX3-XX-XX-X
	DESIGN H. D. LI	TITLE Pitch:1.27x1.27mm Box Header SMD Type Series
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.