

## ORDER INFORMATION:

## SPECIFICATIONS

Current rating : 1 Amps

Dielectric Withstanding : AC 500V

Contact resistance : 20 Milliohms Max.

Insulation resistance : 5000 Megohms Min.

Temperature range : - 40 °C ~ + 105 °C

## MATERIAL :

Housing : High Temperature Thermoplastic

Terminal : Brass 65/35(2680)

SHBH24 -  $\frac{XX}{a} 3 - \frac{XX}{b} - \frac{X}{c} - \frac{XX}{d} - \frac{X}{e} - \frac{X}{f} - \frac{X}{g}$ 

a. Pin of numbers:

10 ~ 100

b. Plated selection:

0 : Tin Plated

1 : Gold Flash

2 : Gold 5u" Gold

3 : Gold 15u" Gold

4 : Gold 30u" Gold

c. Option Post:

0 : None Post

1 : With Post

2 : None Post + Cap

3 : With Post + Cap

d. Solder Pin Length:

if you desire on other length, by marking  
put desired length the B.

e. Plastic Color :

W : white B : black

f. Plastic Material

L:L.C.P

N:Nylon 6T

N9:Nylon 9T(E)


g. Pack Selection :




D : Disk Pack (standard)

R : Reel Pack


## VERSION &amp; EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2004/12/16	A	16-17	Add SHBH24-XX3 Series Plan
2004/12/24	A	16	Revise Material : N1 => N9
2005/02/22	A	16	Add Pack : Disk & Reel
2005/05/16	A	16	Add Option Post : 2、3

GENERAL TOLERANCE	VER DRE. 2004/12/16	PART NO
X. ± 0.50	A H. D. LI	SHBH24 - XX 3 - X X - X - XX-X
.X ± 0.38	DESIGN H. D. LI	TITLE
.XX ± 0.25	CHECKED Y. M. LU	Pitch:1.27x1.27mm Box Header SMD 2xXX W/Post H:5.6mm
.XXX ± 0.15	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.

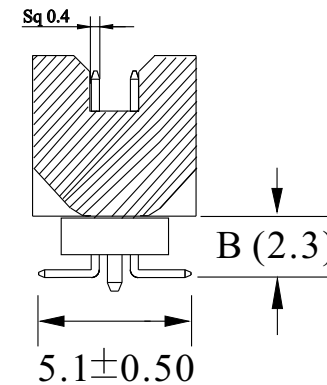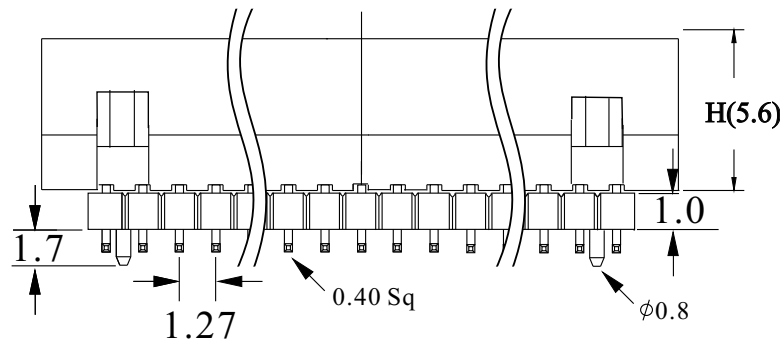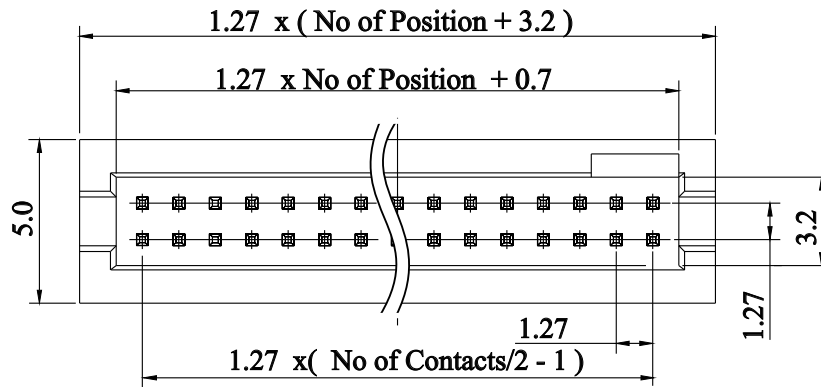

Recommended P.C.Board Hole Layout :

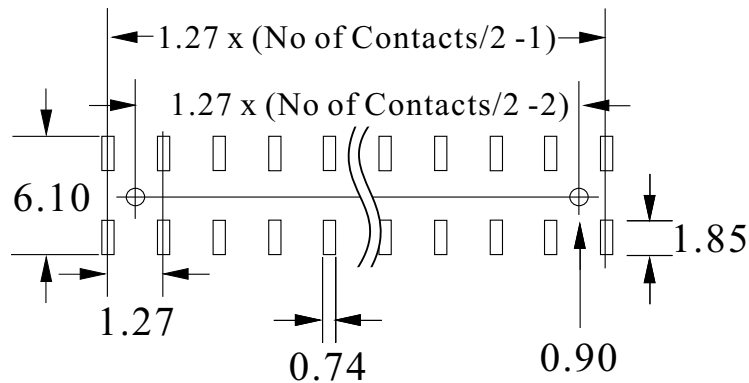

GENAL TOLERANCE	VER DRE. 2004/12/16	PART NO
X. ± 0.50	A H. D. LI	SHBH24 - XX 3 - X X - X - XX-X
.X ± 0.38	DESIGN H. D. LI	TITLE
.XX ± 0.25	CHECKED Y. M. LU	Pitch: 1.27x1.27mm Box Header SMD 2xXX W/Post H:5.6mm
.XXX ± 0.15	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.