

**SPECIFICATIONS**

Current rating : 1 Amps

Dielectric Withstanding : 300V AC/DC

Contact resistance : 20 Milliohms Max.

Insulation resistance : 1000 Megohms Min.

Temperature range : - 40 °C ~ + 105 °C

**MATERIAL :**

Contact Material : Copper Alloy

Insulation Material : polyester, UL 94-0 Nylon 6T

**ORDER INFORMATION:**

$$\text{SHBH24} - \frac{\text{XX}}{\text{a}} 5 - \frac{\text{X}}{\text{b}} \frac{\text{X}}{\text{c}} - \frac{\text{X}}{\text{d}} \frac{\text{X}}{\text{e}} - \frac{\text{X}}{\text{f}}$$

a. Pin of numbers:

05 ~ 60

b. Plated selection:

0 : Tin Plated

1 : Gold Flash

2 : Gold 5u" Gold

3 : Gold 15u" Gold

4 : Gold 30u" Gold

c. Option Post:

0 : None Post

1 : With Post

2 : None Post + Cap

3 : With Post + Cap

d. Plastic Color :

W : white

B : black

e. Plastic Material

L:L.C.P

N:Nylon 6T

N9:Nylon 9T(E)


f. Pack Selection :



D : Disk Pack (standard)

R : Reel Pack




**VERSION & EC DESCRIPTION**


DATE	VERSION	PAGE	DESCRIPTION
2004/11/22	A	20-21	Add SHBH24-XX5 Series Plan
2004/12/24	A	20	Revise Material : N1 => N9
2005/02/22	A	20	Add Pack : Disk & Reel
2005/03/04	A	21	Revise Plan
2005/05/16	A	21	Add Option Post : 2 、 3

GENAL TOLERANCE .X ± 0.38 .XX ± 0.25 .XXX ± 0.13	VER DRE. 2004/11/22 A H. D. LI	PART NO SHBH24-XX5-XX-XX-X
	DESIGN H. D. LI	TITLE Pitch:1.27x1.27mm Box Header SMD Type Series
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.

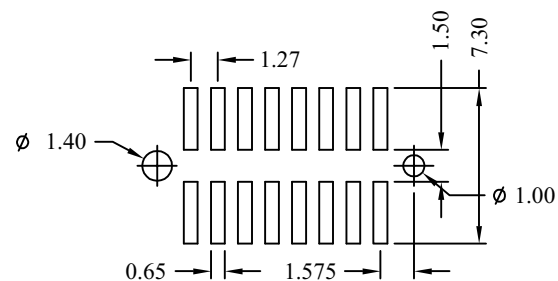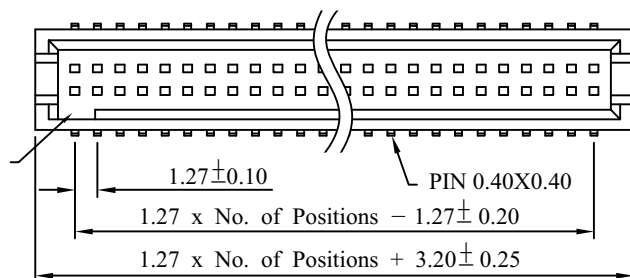

Recommended P.C.Board  
Layout

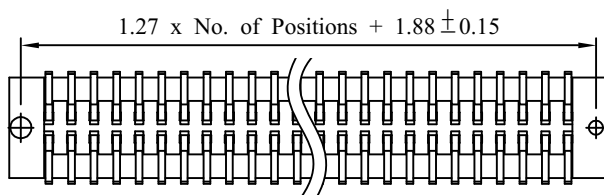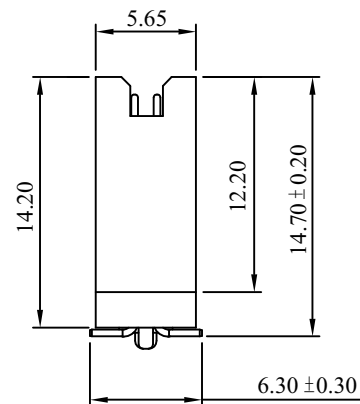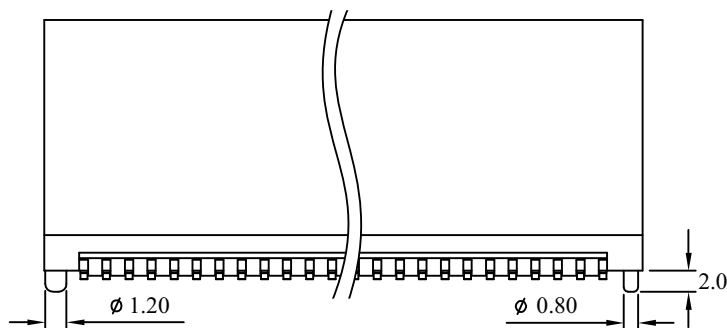

GENAL TOLERANCE .X $\pm 0.38$ .XX $\pm 0.25$ .XXX $\pm 0.13$	VER DRE. 2004/11/22 A H. D. LI	PART NO SHBH24-XX5-XX-XX-X
	DESIGN H. D. LI	TITLE Pitch:1.27x1.27mm Box Header SMD Type Series
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.