

ORDER INFORMATION:

HBH5 - $\frac{XX}{a}$ A - $\frac{XX}{b}$ $\frac{X}{c}$ - $\frac{X}{d}$ - $\frac{XX}{e}$ $\frac{X}{f}$ - $\frac{X}{g}$

Conteract:

Contact:Brass.

Insuiator: PBT.

Color:Black.

Contact Plated: Gold Over Nickel.

Soldeer Plated:Tin Over Nickel.

a. Pin of numbers:

16、20、32、40、44

52、60、68、80、100

b. Plated selection:

0 : Tin Plated

1 : Gold Flash

2 : Gold 5u" Gold

3 : Gold 15u" Gold

4 : Gold 30u" Gold

c. Option Post:

0 : Without Post

d. Solder Pin Length:

if you desire on other length, by marking
put desired length the B.

B=2.9mm(standard)

e. Plastic Color :

B : black

f. Plastic Material

P:PBT


N:Nylon 6T





N9:Nylon 9T(E)

g. Pack Selection :


D : Disk Pack (standard)

R : Reel Pack

GENAL TOLERANCE	VER DRE. 2005/02/16	PART NO
X. ± X.XX	A H. D. LI	HBH5-XXA-XX-X-XX-X
.X ± X.XX	DESIGN H. D. LI	TITLE
.XX ± X.XX	CHECKED Y. M. LU	Pitch:1.27x2.54mm Box Header
.XXX ± X.XX	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO. ; LTD.
UNIT :mm		

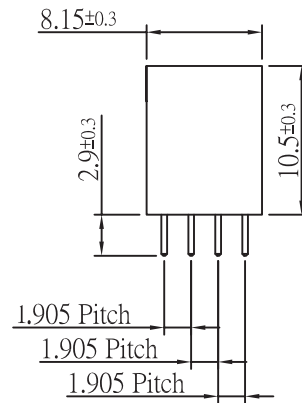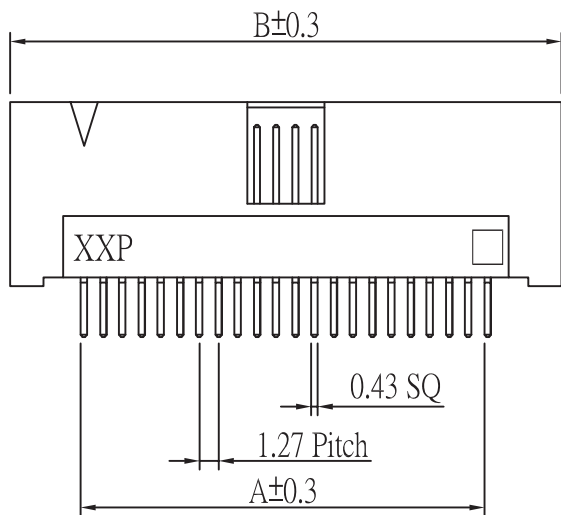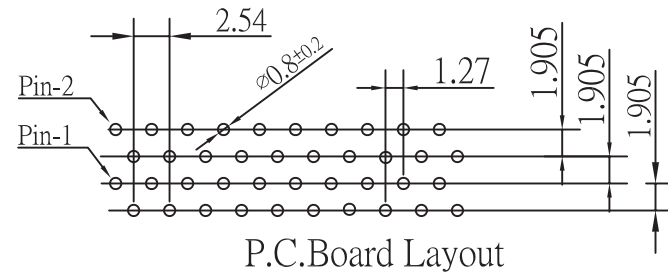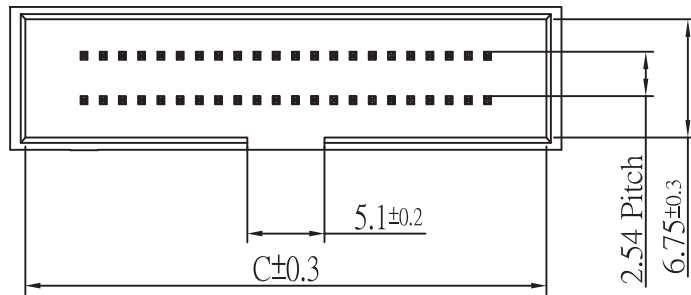

Circuits	Dimension		
	A	B	C
16	8.89	18.66	16.46
20	11.43	21.20	19.00
32	19.05	28.82	26.62
40	24.13	33.90	31.70
44	26.67	36.44	34.24
52	31.75	41.52	39.32
60	36.83	46.60	44.40
68	41.91	51.68	49.48
80	49.53	59.30	57.10
100	62.23	72.00	69.80

GENAL TOLERANCE X. ± X.XX .X ± X.XX .XX ± X.XX .XXX ± X.XX	VER DRE. 2005/02/16	PART NO
	A H. D. LI	HBH5-XXA-XX-X-XX-X
	DESIGN H. D. LI	TITLE
	CHECKED Y. M. LU	Pitch:1.27x2.54mm Box Header
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.