

MATERIAL :

Contact : Brass

Insuiator : Nylon 6T

Finish : Gold flash plated over nickel

ORDER INFORMATION:

$$\text{SHBH5} - \frac{\text{XX}}{\text{a}} 1 - \frac{\text{X}}{\text{b}} \frac{\text{X}}{\text{c}} - \frac{\text{X}}{\text{d}} \frac{\text{X}}{\text{e}} - \frac{\text{X}}{\text{f}}$$

a. Pin of numbers:

20、26、30、34、40、44

50、60、68、80、100

b. Plated selection:

0 : Tin Plated

1 : Gold Flash

2 : Gold 5u" Gold

3 : Gold 15u" Gold

4 : Gold 30u" Gold

c. Option Post:

0 : Without Post

d. Plastic Color :

W : white

B : black

e. Plastic Material

L:L.C.P

N:Nylon 6T

N9:Nylon 9T(E)


f. Pack Selection :





D : Disk Pack (standard)

R : Reel Pack

VERSION & EC DESCRIPTION

DATE	VERSION	PAGE	DESCRIPTION
2005/02/16	A	26-27	Add SHBH5-XX1 Series Plan
2005/02/22	A	26	Add Pack : Disk & Reel

GENERAL TOLERANCE	VER DRE. 2005/02/16	PART NO
X. ± X.XX	A H. D. LI	SHBH5-XX1-XX-XX-X
.X ± X.XX	DESIGN H. D. LI	TITLE
.XX ± X.XX	CHECKED Y. M. LU	Pitch:1.27x2.54mm Box Header SMT Type
.XXX ± X.XX	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

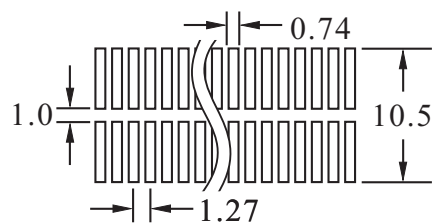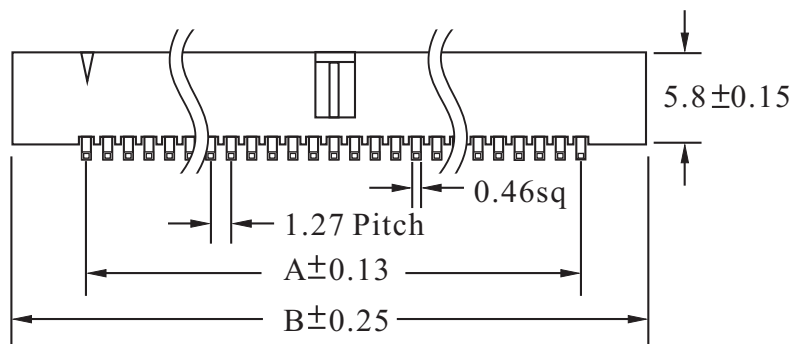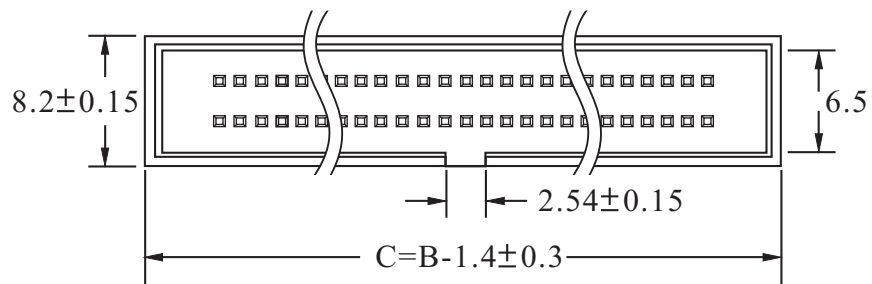

P.C.Board Layout :

Poles	Dimension mm (in.)	
	A	B
20	11.43	20.72
26	15.24	24.53
30	17.78	27.07
34	20.32	29.61
40	24.13	33.42
44	26.67	35.96
50	30.48	39.77
60	36.83	46.12
68	41.91	51.20
80	49.53	58.82
100	62.23	71.52

GENAL TOLERANCE	VER DRE. 2005/02/16	PART NO
X. ± X.XX	A H. D. LI	SHBH5-XX1-XX-XX-X
.X ± X.XX	DESIGN H. D. LI	TITLE
.XX ± X.XX	CHECKED Y. M. LU	Pitch:1.27x2.54mm Box Header SMT Type
.XXX ± X.XX	APPROVED J. F. KANG	
UNIT :mm		

