


ORDER INFORMATION:


SHBH25 - $\frac{XX}{a} 1 - \frac{XX}{b c} - \frac{XX}{d e} - \frac{X}{f}$

MATERIAL
 HOUSING : THERMOPLASTIC UL94V-0
 CONTACT : COPPER ALLOYS



SPECIFICATION
 CURRENT: 3A
 OPERATING TEMPERATURE: -25°C TO +105°C
 DIELECTRIC WITHSTANDING : AC 500 V
 CONTACT RESISTANCE : 20 MOHM MAX
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN

- a. Pin of numbers:
34、40、50
- b. Plated selection:
0 : Tin Plated
1 : Gold Flash
2 : Gold 5u" Gold
3 : Gold 15u" Gold
4 : Gold 30u" Gold
- c. Option Post:
0 : Without Post
- d. Plastic Color :
B : black
- e. Plastic Material
N:Nylon 6T
- f. Pack Selection :
B : Bag Pack
T : Tube Pack


GENERAL TOLERANCE	H. D. LI	PART NO
.X ± 0.38	DESIGN H. D. LI	SHBH25-XX1-XX-XX-X
.XX ± 0.25	CHECKED Y. M. LU	TITLE
ANG ± 5°	APPROVED J. F. KANG	Pitch:1.27x2.54mm Box Header+ Pin Header SMT Type
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

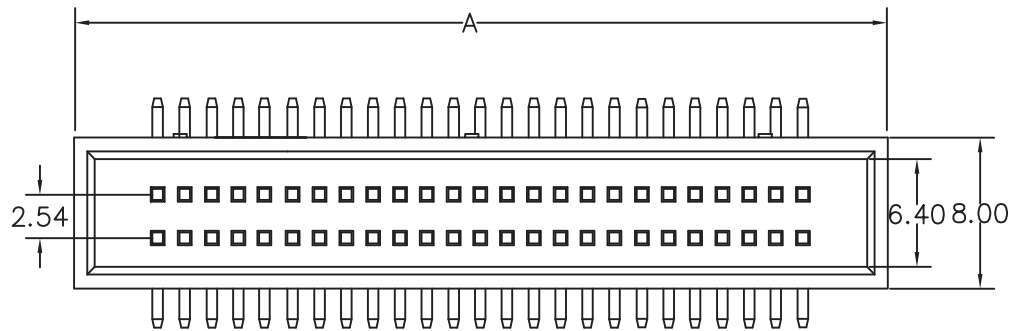

P.C.B LAYOUT

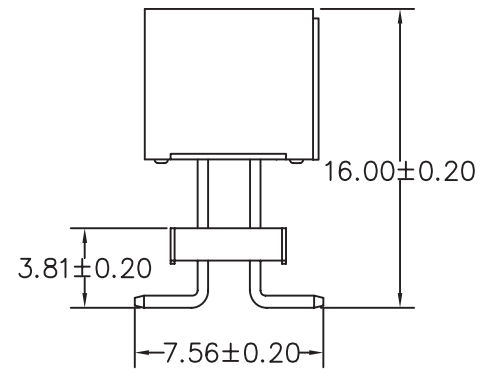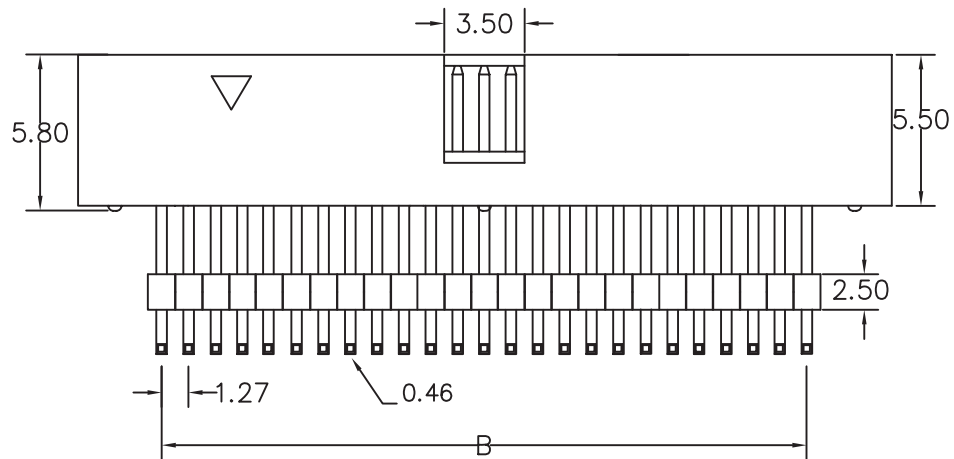

Number Of Position	DIMENSIONS	
	A	B
34	21.59	20.32
40	25.60	24.13
50	31.95	30.48

GENERAL TOLERANCE .X ± 0.38 .XX ± 0.25 ANG ± 5°	DESIGN	H. D. LI	PART NO	SHBH25-XX1-XX-XX-X
	CHECKED	Y. M. LU	TITLE	Pitch: 1.27x2.54mm Box Header+ Pin Header SMT Type
	APPROVED	J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.	
	UNIT :mm			