

SPECIFICATIONS

Current Rating : 3 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 1000V

Operating Temperature : -55° — +105°C

MATERIAL :

Housing :

Standard :P.B.T

Terminal :


ORDER INFORMATION:




$$\text{HBH1} - \frac{\text{XX}}{\text{a}} \frac{1}{\text{b}} - \frac{\text{X0}}{\text{c}} - \frac{\text{X}}{\text{d}} - \frac{\text{XX}}{\text{e f}} - \frac{\text{X}}{\text{g}}$$

- a. Pin of numbers:
10 ~ 100
- b. Plastic Height:
1 : A=9.1mm
- c. 0 : Tin Plated
1 : Gold Flash
2 : Gold 5u"
3 : Gold 15u"
4 : Gold 30u"
- d. Solder Pin Length:
if you desire on other length, by marking
put desired length the B.
B=3.2mm(standard)
- e. Plastic Color :
B : black
- f. Plastic Material
P : P.B.T (off料)
E : P.B.T (新料)
N : Nylon
- g. Pack Selection :
D : Disk Pack (standard)
R : Reel Pack


VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2004/03/26	A	2-3	Add HBH1-XX1 Plan
2005/02/21	A	2	Add Pack : Disk & Reel

GENERAL TOLERANCE	DRAW DATE	2004/03/26 H. D. LI	PART NO
X. ± 0.50	DESIGN	H. D. LI	HBH1 - XX1 - X0 - X - XX - X
.X ± 0.38	CHECKED	Y. M. LU	TITLE
.XX ± 0.25	APPROVED	J. F. KANG	2.54 2xXX 筒半 H=9.1 無柱 黑 P.B.T
.XXX ± 0.15	UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.

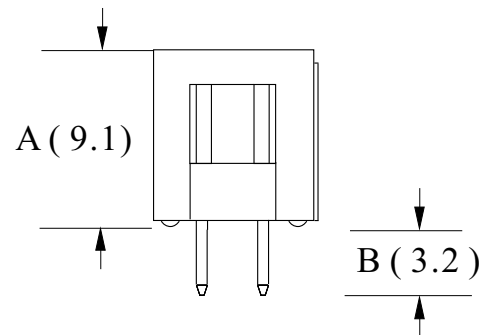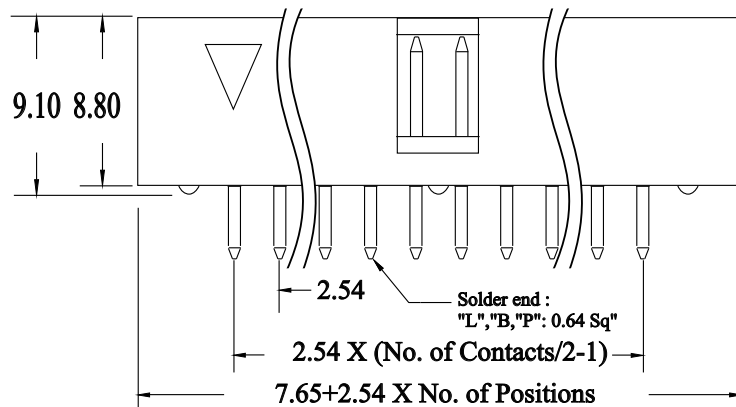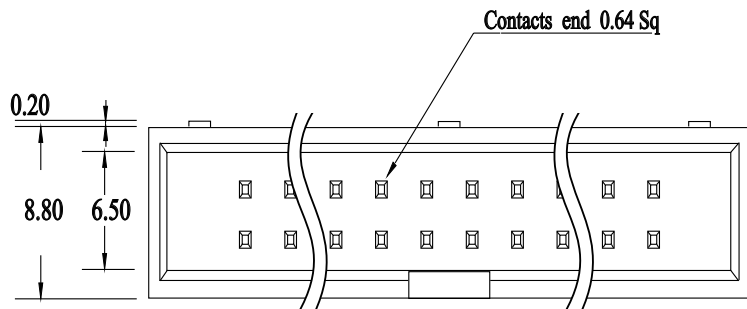

Recommended P.C.Board Hole Layout :

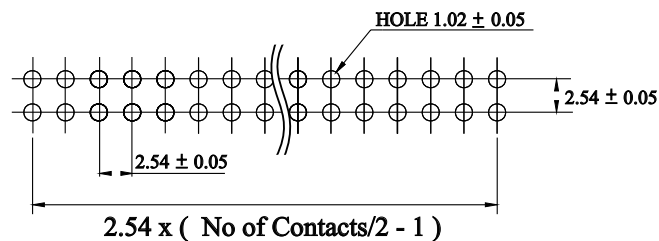

GENAL TOLERANCE X. ± 0.50 .X ± 0.38 .XX ± 0.25 .XXX ± 0.15	DRAW 2004/03/26 DATE H. D. LI	PART NO HBH1 - XX1 - X0 - X - XX - X
	DESIGN H. D. LI	TITLE 2.54 2xXX 筒半 H=9.1 無柱 黑 P.B.T
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.