

SPECIFICATIONS

Current Rating : 3 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 1000V

Operating Temperature : -40° — +105°C

MATERIAL :

Housing : .

Standard :

Terminal :


ORDER INFORMATION:


$$\text{SHBH1} - \frac{\text{XX}}{\text{a}} \frac{1}{\text{b}} - \frac{\text{X}0}{\text{c}} - \frac{\text{X}}{\text{d}} \frac{\text{X}}{\text{e}} - \frac{\text{X}}{\text{f}}$$

- a. Pin of numbers:
10、14、16、20、26、34、40
- b. Plastic Height:
1 : H=9.10mm (standard)
- c. 0 : Tin Plated
1 : Gold Flash
2 : Gold 5u"
3 : Gold 15u"
4 : Gold 30u"
- d. Plastic Color :
B : black
- e. Plastic Material
P : P.B.T (off料)
E : P.B.T (新料)
N : Nylon
- f. Pack Selection :
D : Disk Pack (standard)
R : Reel Pack


VERSION & EC DESCRIPTION

DATE	VERSION	PAGE	DESCRIPTION
2004/03/26	A	6-7	Add SHBH1-XX1 Plan
2004/10/15	A	6	Revise Material : P.B.T => Nylon 6T
2004/12/30	A	6-7	Revise SHBH1-XX1 Plan(Post)
2005/02/21	A	6	Add Pack : Disk & Reel

GENAL TOLERANCE	DRAW DATE	2004/03/26	PART NO
X. ± 0.50	H. D. LI		SHBH1 - XX 1 - X0 - XX - X
.X ± 0.38	DESIGN	H. D. LI	TITLE
.XX ± 0.25	CHECKED	Y. M. LU	2.54 2xXX 筒牛H=9.1 無柱 SMD 黑 P.B.T
.XXX ± 0.15	APPROVED	J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.
UNIT :mm			

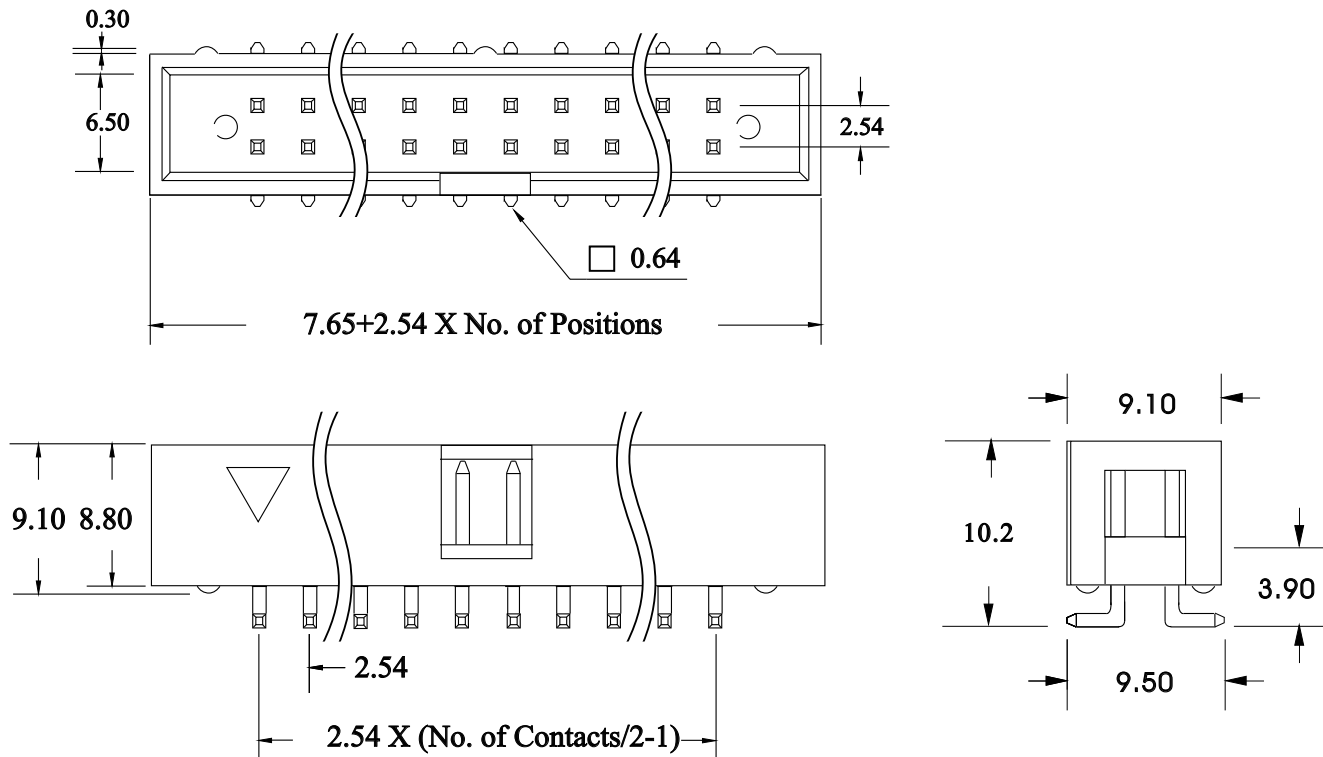

Recommended P.C.Board Hole Layout :

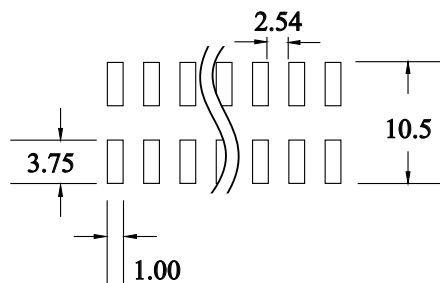

GENERAL TOLERANCE X. ± 0.50 .X ± 0.38 .XX ± 0.25 .XXX ± 0.15	DRAW DATE 2004/03/26 H. D. LI	PART NO SHBH1 - XX 1 - X0 - XX - X
	DESIGN H. D. LI	TITLE 2.54 2xXX 筒半H=9.1 無柱 SMD 黑 P.B.T
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		