

Specifications:

Current rating:1.0A AC/DC
 Voltage rating:100V AC/DC
 Contact resistance:10m ohm. max.
 Insulation resistance:5,000M ohm. min.
 Withstanding Voltage:AC 1,000V AC For One Minute
 Operating temperature range:-40°C ~ +105°C
 solder heat:Up to 260°C 1 minute
 without any plastic deformation.

Materials:

Insulator:PPS(UL94V-0)standard color:black
 Contact:inner clip,beryllium copper.
 5u"gold 50u" nickel
 Outer sleeve, brass,
 150u" Tin over 50u" nickel

ORDER INFORMATION:

HSIP254090 - $\frac{XX}{a} \frac{A}{b} - \frac{BP}{c} \frac{X}{c}$


a. Pin of numbers:

01 ~ 40


b. A:17.85mm

c. Pack assortment :

B : Bag

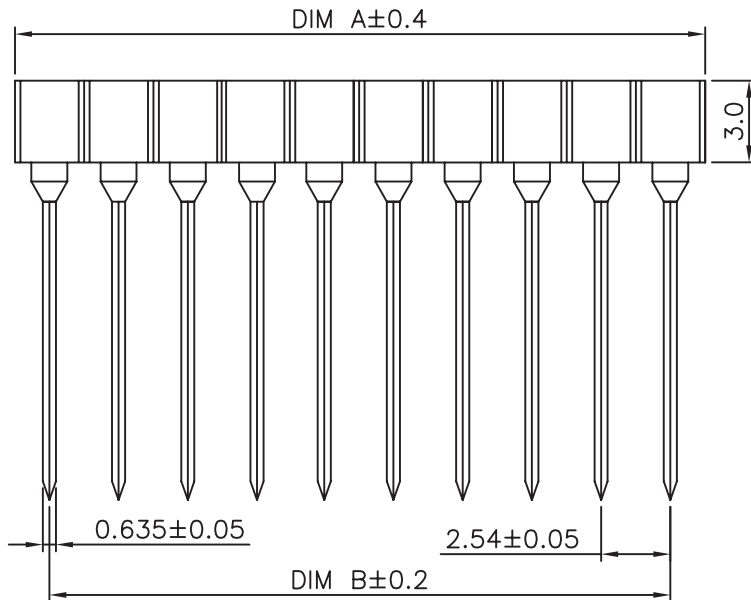

Contacts	DIM A	DIM B	Contacts	DIM A	DIM B	Contacts	DIM A	DIM B
01	2.54	—	12	30.48	27.94	23	58.42	55.88
02	5.08	2.54	13	33.02	30.48	24	60.96	58.42
03	7.62	5.08	14	35.56	33.02	25	63.50	60.96
04	10.16	7.62	15	38.10	35.56	26	66.04	63.50
05	12.70	10.16	16	40.64	38.10	27	68.58	66.04
06	15.24	12.70	17	43.18	40.64	28	71.12	68.58
07	17.78	15.24	18	45.72	43.18	29	73.66	71.12
08	20.32	17.78	19	48.26	45.72	30	76.20	73.66
09	22.86	20.32	20	50.80	48.26	32	81.28	78.74
10	25.40	22.86	21	53.34	50.80	40	101.60	99.06
11	27.94	25.40	22	55.88	53.34			

GENAL TOLERANCE .X ± 0.2 .XX ± 0.15	DATE H. D. LI	PART NO HSIP254090-XXA-BP-X
	DESIGN H. D. LI	TITLE Sip Socket Single Row 17.85mm Length
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.