

VERSION

A


### ORDER INFORMATION:

MATERIAL :  
 HOUSING:LCP UL 94V-0 COLOR:NATURE  
 ACTUATOR:LCP UL 94V-0 COLOR:BLACK  
 CONTACTS:PHOSPHOR BRONZE  
 PEG:BRASS  
 PLATING:  
 CONTACTS:TIN OVER NICKEL  
 PEG:TIN OVER NICKEL  
 PART NO:  
 OPERATING VOLTAGE:50V AC,DC  
 CURRENT RATING:0.3A AC,DC  
 OPERATING TEMPERATURE:-25°C~+85°C

SFPCRB05- $\frac{XX}{a}$ 4-L- $\frac{X}{b}$






a. NO.of Contacts  
04~60

b.Pack selection:  
T:Tube Pack  
R:Reel Pack


GENERAL TOLERANCE X. ± .X ± .XX ± .XXX ±	DRAW DATE 2004/08/11 H. D. LI	PART NO <b>SFPCRB05-XX4-L-X</b>
	DESIGN H. D. LI	TITLE FFC/FPC Connector0.5mm Press c Type H:1.2
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

VERSION

A

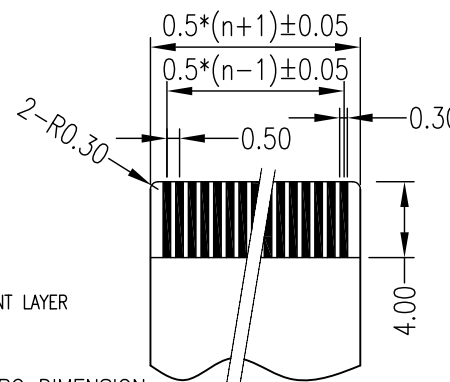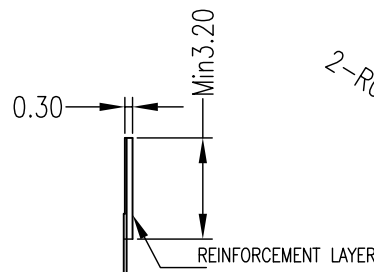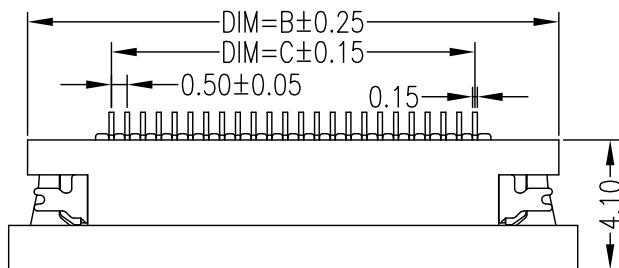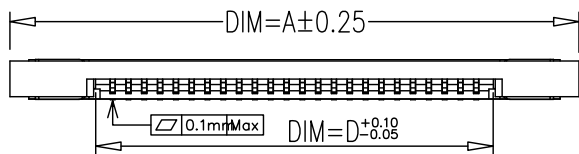

RECOMMENDED FPC DIMENSION

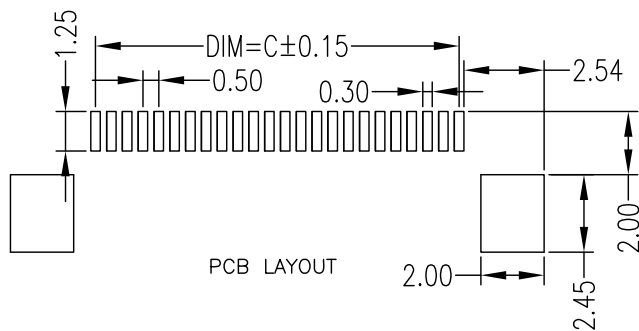

PCB LAYOUT

PIN数	DIM=A	DIM=B	DIM=C	DIM=D
4P	8.0	6.8	1.50	2.6
5P	8.5	7.3	2.00	3.1
6P	9.0	7.8	2.50	3.6
7P	9.5	8.3	3.00	4.1
8P	10.0	8.8	3.50	4.6
9P	10.5	9.3	4.00	5.1
10P	11.0	9.8	4.50	5.6
11P	11.5	10.3	5.00	6.1
12P	12.0	10.8	5.50	6.6
13P	12.5	11.3	6.00	7.1
14P	13.0	11.8	6.50	7.6
15P	13.5	12.3	7.00	8.1
16P	14.0	12.8	7.50	8.6
17P	14.5	13.3	8.00	9.1
18P	15.0	13.8	8.50	9.6
19P	15.5	14.3	9.00	10.1
20P	16.0	14.8	9.50	10.6
21P	16.5	15.3	10.00	11.1
22P	17.0	15.8	10.50	11.6
23P	17.5	16.3	11.00	12.1
24P	18.0	16.8	11.50	12.6
25P	18.5	17.3	12.00	13.1
26P	19.0	17.8	12.50	13.6
27P	19.5	18.3	13.00	14.1
28P	20.0	18.8	13.50	14.6
29P	20.5	19.3	14.00	15.1
30P	21.0	19.8	14.50	15.6
31P	21.5	20.3	15.00	16.1
32P	22.0	20.8	15.50	16.6
33P	22.5	21.3	16.00	17.1
34P	23.0	21.8	16.50	17.6
35P	23.5	22.3	17.00	18.1
36P	24.0	22.8	17.50	18.6
37P	24.5	23.3	18.00	19.1
38P	25.0	23.8	18.50	19.6
39P	25.5	24.3	19.00	20.1
40P	26.0	24.8	19.50	20.6
41P	26.5	25.3	20.00	21.1
42P	27.0	25.8	20.50	21.6
43P	27.5	26.3	21.00	22.1
44P	28.0	26.8	21.50	22.6
45P	28.5	27.3	22.00	23.1
46P	29.0	27.8	22.50	23.6
47P	29.5	28.3	23.00	24.1
48P	30.0	28.8	23.50	24.6
49P	30.5	29.3	24.00	25.1
50P	31.0	29.8	24.50	25.6
51P	31.5	30.3	25.00	26.1
52P	32.0	30.8	25.50	26.6
53P	32.5	31.3	26.00	27.1
54P	33.0	31.8	26.50	27.6
55P	33.5	32.3	27.00	28.1
56P	34.0	32.8	27.50	28.6
57P	34.5	33.3	28.00	29.1
58P	35.0	33.8	28.50	29.6
59P	35.5	34.3	29.00	30.1
60P	36.0	34.8	29.50	30.6

GENAL TOLERANCE	DRAW DATE	2004/08/11 H. D. LI
X. ±	DESIGN	H. D. LI
.X ±	CHECKED	Y. M. LU
.XX ±	APPROVED	J. F. KANG
.XXX ±	UNIT :mm	

PART NO	2004/08/11
DATE	H. D. LI
DESIGN	H. D. LI
CHECKED	Y. M. LU
APPROVED	J. F. KANG

PART NO		SFPCRB05-XX4-L-X
TITLE		
FPC/FPC Connector0.5mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.
Press c Type H:1.2		