

## ORDER INFORMATION:

SWB125027-  $\overline{\text{XXB}}$  - WN -  $\overline{\text{X}}$

### ■ SPECIFICATIONS

- Voltage Rating : 100V AC/DC
- Current Rating : 1A AC/DC
- Withstanding Voltage : 500V AC/minute
- Insulation Resistance : 500M $\Omega$  min
- Temperature Range : - 25 $^{\circ}$ C to + 85 $^{\circ}$ C
- Contact Resistance : 20m $\Omega$  max

### ■ WAFER


- Material : Contact : Phos. Bronze, Tin Plated  
Base : Nylon 9T UL94V-0
- Q' ty : 1,000 pcs./Reel



a. Pin of numbers:

2 ~ 10、12、20、25、30

b. Pack :



R : Reel


GENAL TOLERANCE .X $\pm$ 0.3 .XX $\pm$ 0.2 .XXX $\pm$ 0.1	DATE H. D. LI	PART NO SWB125027-XXB-WN-X
	DESIGN H. D. LI	TITLE 1.25mm Crimp Style Connectors Wafer (SMT)
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

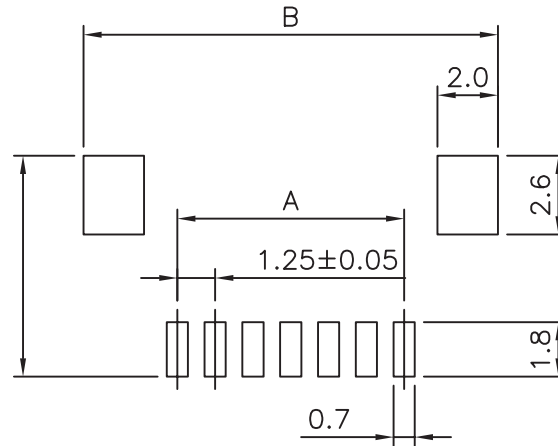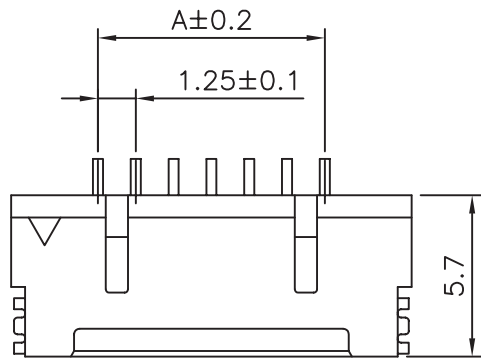

Recommant PCB Layout

Poles	Dimensions(mm)	
	A	B
2	1.25	7.45
3	2.50	8.70
4	3.75	9.95
5	5.00	11.20
6	6.25	12.45
7	7.50	13.70
8	8.75	14.95
9	10.00	16.20
10	11.25	17.45
12	13.75	19.95
20	23.75	29.95
25	30.00	36.20
30	36.25	42.45

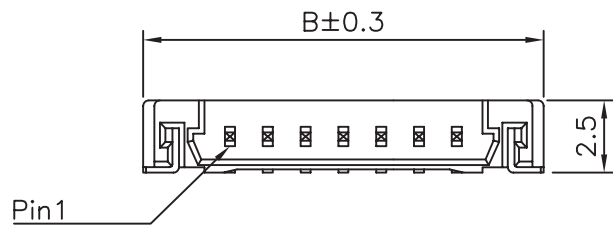

GENAL TOLERANCE .X ± 0.3 .XX ± 0.2 .XXX ± 0.1	DATE	H. D. LI	PART NO SWB125027-XXB-WN-X
	DESIGN	H. D. LI	
	CHECKED	Y. M. LU	1.25mm Crimp Style Connectors Wafer (SMT)
UNIT :mm	APPROVED	J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.