

## SPECIFICATIONS

Voltage Rating : 150V AC/DC  
 Current Rating : 1A AC/DC  
 Withstanding Voltage : 500V AC/minute  
 Insulation Resistance : 500 MΩ min.  
 Temperature Range:-25 °C to + 85 °C  
 Contact Resistance:30 mΩ max.


## MATERIAL




Solder : Phosphor Bronze ,Gold Plated  
 Contact : Brass, Gold Plated  
 Brass : Nylon 6T UL94V-0  
 Q'ty : 1,000 pcs./Reel

## ORDER INFORMATION:


SWB125D027-  $\frac{XX}{a}$  H - K  $\frac{X}{b}$  -  $\frac{X}{c}$

- a. Pin of numbers:  
2~15
- b. Plastic material  
N:Nylon 6T
- c. Pack selection:  
R:Reel Pack

GENAL TOLERANCE .X ± 0.3 .XX ± 0.2 .XXX ± 0.1	DATE H. D. LI	PART NO SWB125D027-XXH-KX-X
	DESIGN H. D. LI	TITLE 1.25mm SMT 90度 TYPE JAE DF13
	CHECKED Y. M. LU	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.
UNIT :mm	APPROVED J. F. KANG	

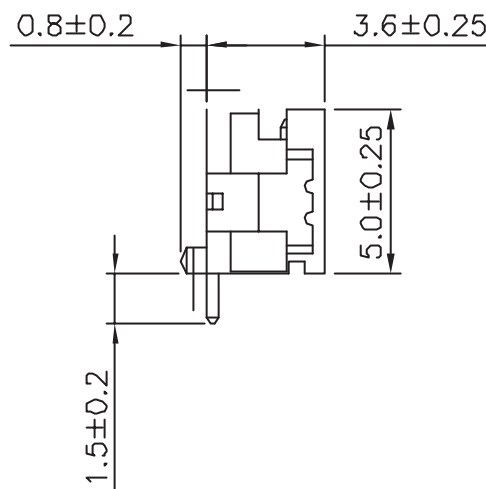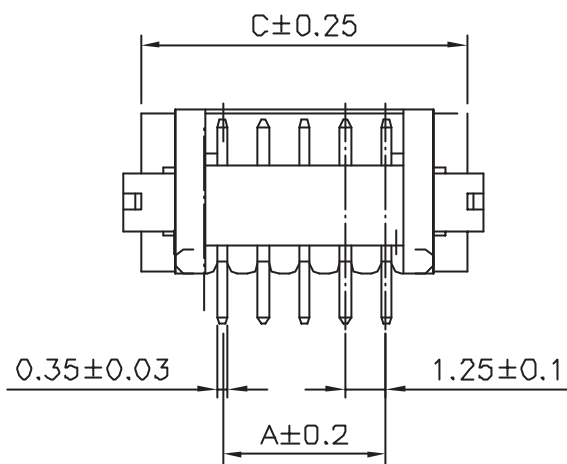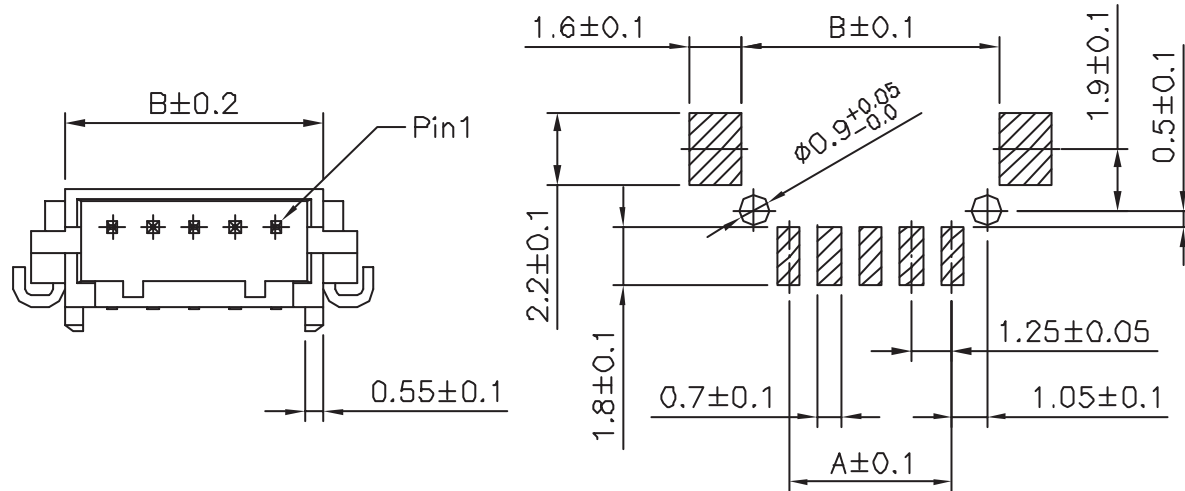

Poles	Dimensions(mm)		
	A	B	C
2	1.25	4.15	6.25
3	2.50	5.40	7.50
4	3.75	6.65	8.75
5	5.00	7.90	10.00
6	6.75	9.15	11.25
7	7.50	10.40	12.50
8	8.75	11.65	13.75
9	10.00	12.90	15.00
10	11.25	14.15	16.25
11	12.50	15.40	17.50
12	13.75	16.65	18.75
13	15.00	17.90	20.00
14	16.25	19.15	21.25
15	17.50	20.40	22.50

GENAL TOLERANCE .X ± 0.3 .XX ± 0.2 .XXX ± 0.1	DATE H. D. LI	PART NO SWB125D027-XXH-KX-X
	DESIGN H. D. LI	
	CHECKED Y. M. LU	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.
UNIT :mm	APPROVED J. F. KANG	