

VERSION

A

SPECIFICATIONS

Voltage Rating : 100V AC/DC

Current Rating : 2A AC/DC

Insulator resistance : 1000 MΩ min

Withstanding Voltage : 800V AC / minute

Temperature Range : -25°C to +85°C

MATERIAL :

Wafer : High Temperature Plastic Nylon 46 UL94V-0

Pin : High Strength Brass With Tin Over Nickel Plated

Applicable PC Board Thickness : 0.8 ~ 1.6mm

Contact Resistance : Initial Value 10 mΩ max.

After environmental testing 20 mΩ max.

ORDER INFORMATION:

SWB200P - $\frac{XX}{a}$ V - $\frac{X}{b}$

a. Pin of numbers:

2 ~ 16

b. Pack :





T : Tube

R : Reel


B : Bag


C : Contron

GENERAL TOLERANCE .X ± 0.3 .XX ± 0.1	DATE H. D. LI	PART NO SWB200P-XXV - X
	DESIGN H. D. LI	TITLE 2.0 WAFER PH Type XXPIN 180度
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.

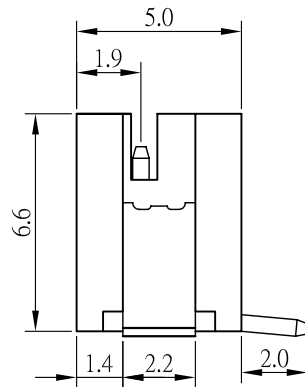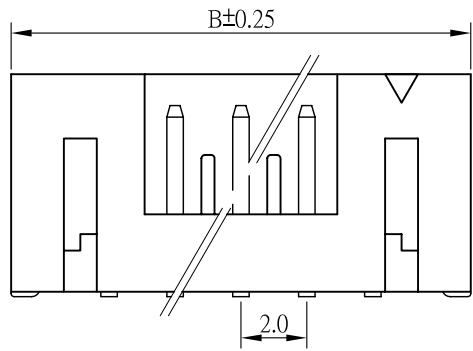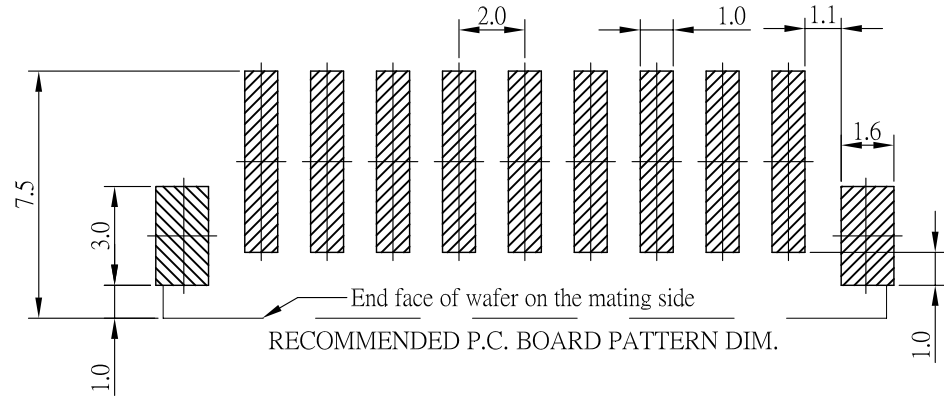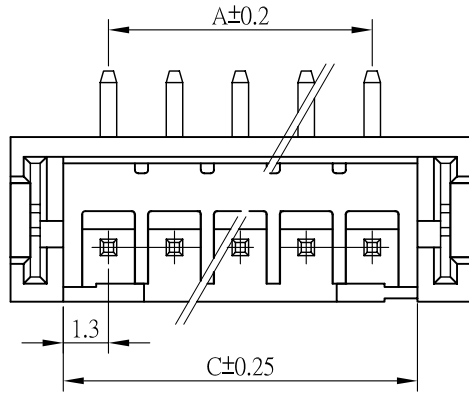

CKT.	A	B	C
2	2.00	7.90	4.80
3	4.00	9.90	6.80
4	6.00	11.90	8.80
5	8.00	13.90	10.80
6	10.00	15.90	12.80
7	12.00	17.90	14.80
8	14.00	19.90	16.80
9	16.00	21.90	18.80
10	18.00	23.90	20.80
11	20.00	25.90	22.80
12	22.00	27.90	24.80
13	24.00	29.90	26.80
14	26.00	31.90	28.80
15	28.00	33.90	30.80
16	30.00	35.90	32.80

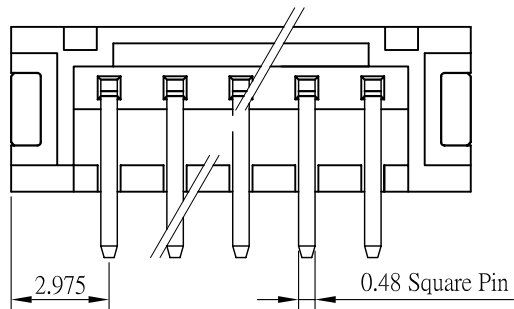

GENERAL TOLERANCE .X ± 0.3 .XX ± 0.1	DRAW 2005/03/07 DATE H. D. LI	PART NO SWB200P-XXV-X
	DESIGN H. D. LI	TITLE 2.0 WAFER PH Type XX PIN 180度
	CHECKED Y. M. LU	 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.
UNIT :mm	APPROVED J. F. KANG	