

**SPECIFICATIONS**

Voltage Rating : 100V ( AC )

Current Rating : 2A

Contact Resistance : 20 mΩ max

Insulator resistance : 1000 MΩ min

Dielectric Withstanding Voltage : 800V AC / 1 min

Temperature Range : -25°C to +85°C

**MATERIAL :**

Contact : Brass 0.50mm ( 0.20" ) Square Wire Pins

Color : White or Natural

Insulator : Nylon 66 UL94V-0

Plating : Tin or Gold Plated

Applicable PC Board Thickness : 0.8 to 1.6mm

**ORDER INFORMATION:**WB200P -  $\frac{XX}{a}$  H -  $\frac{X}{b}$ 

a. Pin of numbers:

2 ~ 20

b. Pack :


T : Tube



R : Reel

B : Bag




C : Contron

VERSION & EC DESCRIPTION			
DATE	VERSION	PAGE	DESCRIPTION
2005/02/01	A	12-13	Add WB200P-XXH Plan


GENAL TOLERANCE .X ± 0.5 .XX ± 0.1	DRAW DATE	2005/02/01 H. D. LI	PART NO WB200P- XXH - X
	DESIGN	H. D. LI	
	CHECKED	Y. M. LU	TITLE 2.0 WAFER PH Type XX PIN 90度
UNIT :mm	APPROVED	J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO.; LTD.

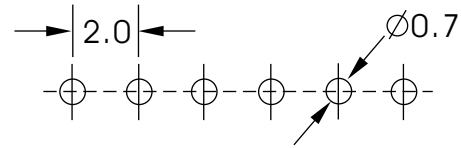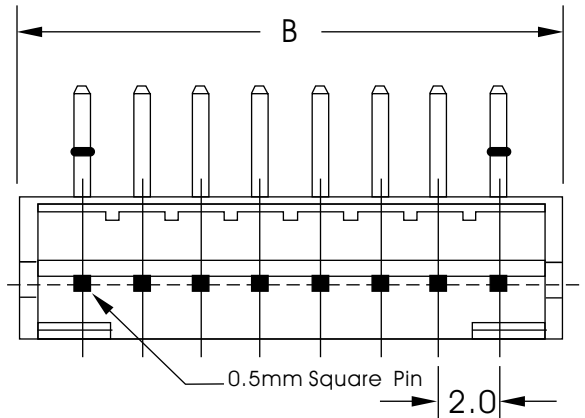

RECOMMENDED P.C.BOARD HOLE DIMM.

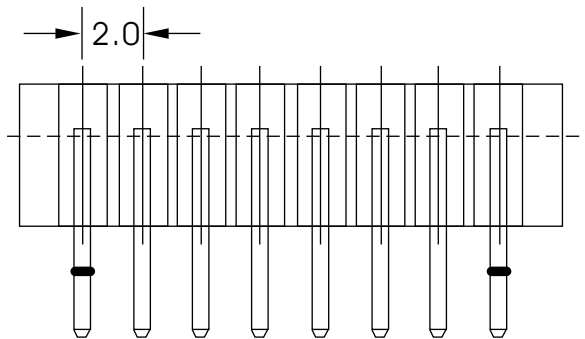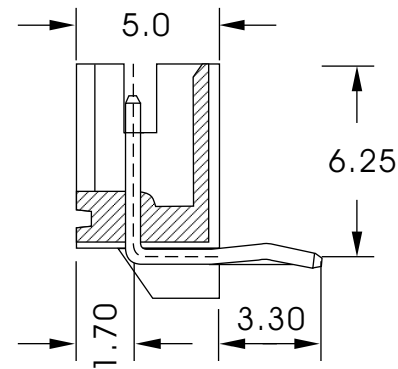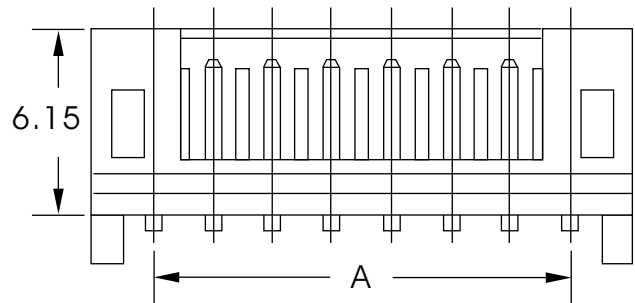

Poles	A	B
2	2.00	6.04
3	4.00	8.04
4	6.00	10.04
5	8.00	12.04
6	10.00	14.06
7	12.00	16.06
8	14.00	18.08
9	16.00	20.08
10	18.00	22.10
11	20.00	24.10
12	22.00	26.12
13	24.00	28.12
14	26.00	30.14
15	28.00	32.14
16	30.00	34.14
17	32.00	36.16
18	34.00	38.16
19	36.00	40.16
20	38.00	42.16

GENAL TOLERANCE .X $\pm 0.5$ .XX $\pm 0.1$	DRAW 2005/02/01 DATE H. D. LI	PART NO WB200P- XXH - X
	DESIGN H. D. LI	TITLE 2.0 WAFER PH Type XXPIN 90度
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO. ; LTD.