

SPECIFICATIONS

Electronical

Current Rating: 3A AC DC

Voltage Rating: 250V AC, DC

Operating Temp.: -25°C ~ +85°C

Contact Resistance: 20mΩ / Max.

Insulation Resistance: 1000MΩ / Min.

Material

Terminal Material: Brass/ Tin-plated/ Gold-plated

Material: Nylon 66, UL 94V-0

ORDER INFORMATION:

WBD200P - $\frac{XX}{a}$ H - $\frac{X}{b}$

a. Pin of numbers:

06、08、10、12、14、16、18

20、22、24、26、28、30、32


b. Pack :





T : Tube

R : Reel


B : Bag

C : Contron


GENAL TOLERANCE .X ± 0.5 .XX ± 0.1	DATE H. D. LI	PART NO WBD200P- XXH - X
	DESIGN H. D. LI	
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO.; LTD.

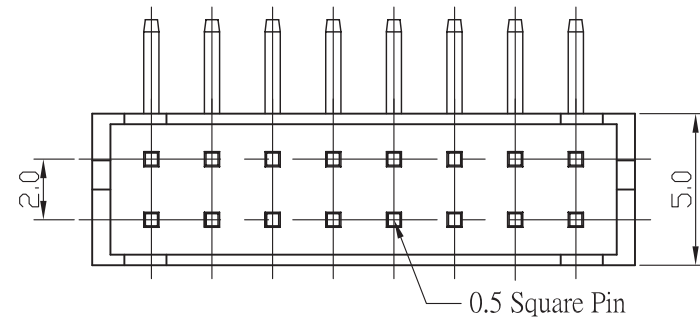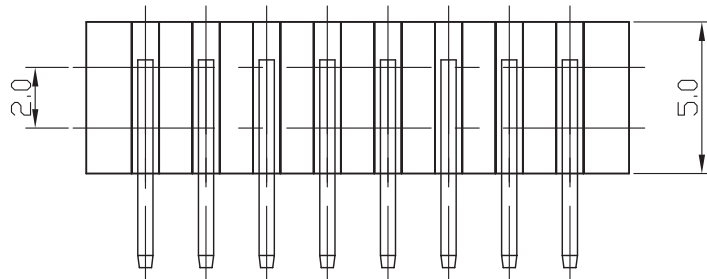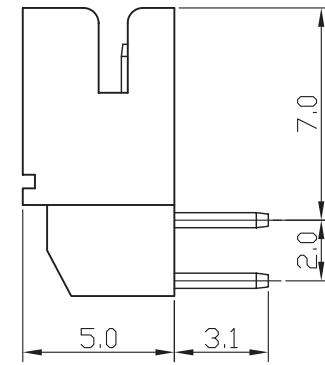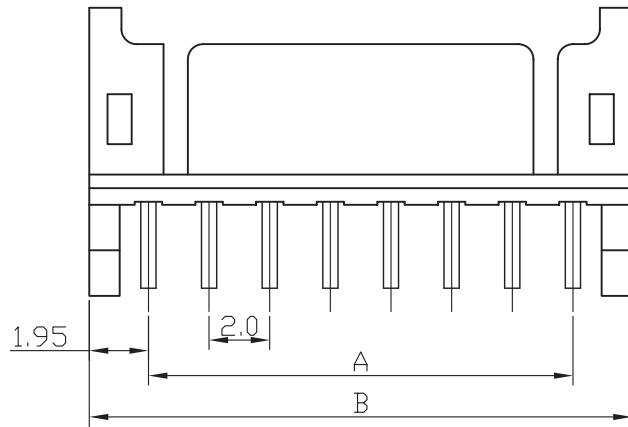

Poles	Dimension mm (in.)	
	A	B
6	4.0(0.157)	7.9(0.311)
8	6.0(0.236)	9.9(0.390)
10	8.0(0.315)	11.9(0.469)
12	10.0(0.394)	13.9(0.547)
14	12.0(0.472)	15.9(0.626)
16	14.0(0.551)	17.9(0.705)
18	16.0(0.630)	19.9(0.783)
20	18.0(0.709)	21.9(0.862)
22	20.0(0.787)	23.9(0.941)
24	22.0(0.886)	25.9(1.020)
26	24.0(0.945)	27.9(1.098)
28	26.0(1.024)	29.9(1.177)
30	28.0(1.102)	31.9(1.256)
32	30.0(1.181)	33.9(1.335)
34	32.0(1.260)	35.9(1.413)
40	38.0(1.496)	41.9(1.650)

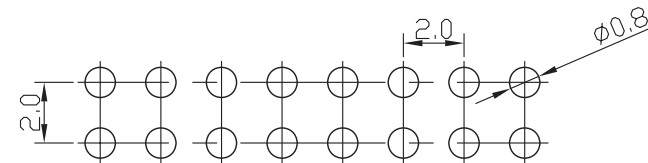

RECOMMENDED P.C. BOARD HOLE DIMM.

GENAL TOLERANCE .X ± 0.5 .XX ± 0.1	DATE H. D. LI	PART NO WBD200P-XXH-X
	DESIGN H. D. LI	TITLE 2.0mm Wire-to-Board Header 90° Dual Row Type
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO.; LTD.