

SPECIFICATIONS

Voltage Rating : 250V AC/max

Current Rating : 2A AC/DC

Insulator resistance : 1000 MΩ/ min

Dielectric Withstanding Voltage : 1500V AC/min

Temperature Range : -25°C to +85°C

Contact Resistance : 10 mΩ max.

Terminal Material : Brass/Tin Plated/Gold-platedd

Material : Nylon 66 UL94V-2

ORDER INFORMATION:

WB254L - $\frac{XX}{a}$ H - $\frac{X}{b}$

a. Pin of numbers:

02 ~ 20

b. Pack :

T : Tube


R : Reel



B : Bag

C : Contron



VERSION & EC DESCRIPTION

DATE	VERSION	PAGE	DESCRIPTION
2005/05/11	A	6-7	Add WB254L-XXH Plan


GENAL TOLERANCE	DRAW DATE	2005/05/11 H. D. LI	PART NO
X ± 0.3	DESIGN	H. D. LI	WB254L - XX H - X
.X ± 0.2	CHECKED	Y. M. LU	TITLE
.XX ± 0.15	APPROVED	J. F. KANG	Pitch 2.54mm Wire to Board Header DIP 90 Type(彎反向)
.XXX ± 0.10	UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.

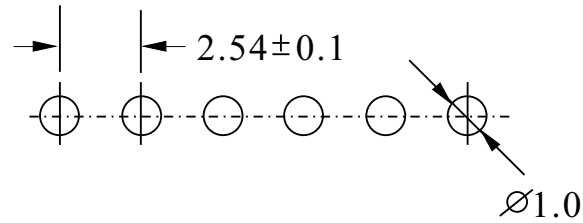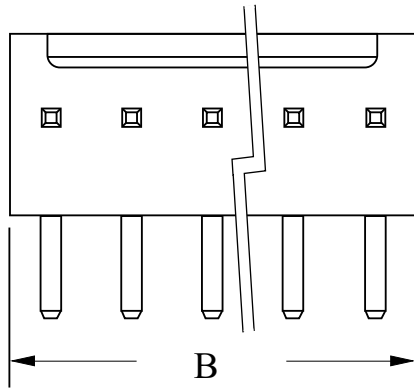

Recommmand PCB Layout

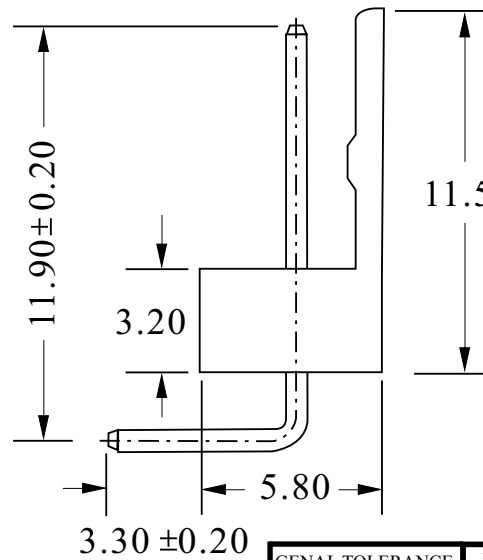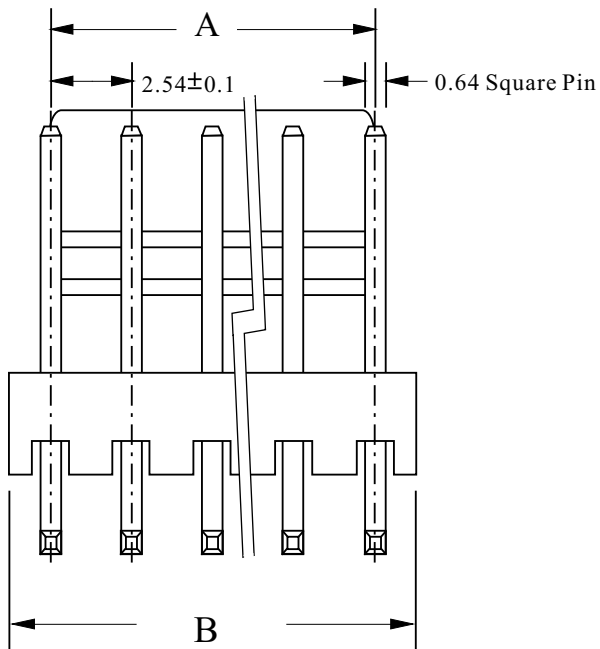

Poles	A	B
2	2.54	5.12
3	5.08	7.66
4	7.62	10.20
5	10.16	12.74
6	12.70	15.30
7	15.24	17.94
8	17.78	20.48
9	20.32	23.02
10	22.86	25.52
11	25.40	28.12
12	27.94	30.68
13	30.48	33.10
14	33.02	35.80
15	35.56	38.34
16	38.10	40.94
17	40.46	43.30
18	43.18	45.90
19	45.72	48.56
20	48.26	50.80

GENAL TOLERANCE X ± 0.3 .X ± 0.2 .XX ± 0.15 .XXX ± 0.10	DRAW 2005/05/11 DATE H. D. LI	PART NO WB254L - XX H - X
	DESIGN H. D. LI	TITLE Pitch 2.54mm Wire to Board Header DIP 90 Type(彎反向)
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.