

Specifications

Electrical

Voltage Rating: 250V(AC)

Current Rating: 2.5A

Contact Resistance: 20mΩ max.

Dielectric Withstanding Voltage: 1000V AC/1min.

Insulation Resistance: 1000MΩ min.

Material

Insulator: Nylon 66 UL 94V-2

Color: Red or White

Contact: Brass 0.64mm(0.25") Square Wire Pins


Plating: Tin or Gold Plated


Temperature Range: -25°C~+85°C

ORDER INFORMATION:





WB254011 - XX S1 - WN - B
a

a. Pin of numbers:
02~12


GENERAL TOLERANCE .X ± 0.5 .XX ± 0.1	DATE H. D. LI	PART NO WB254011-XXS1-WN-B
	DESIGN H. D. LI	TITLE 2.54 Wafer Wire to Board Header DIP 180° Type (白色短靠背)
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

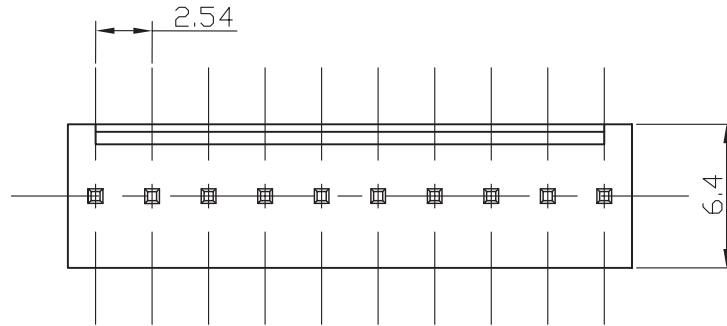

Poles	Dimension mm (in.)	
	A	B
2	2.54(0.100)	5.1(0.200)
3	5.08(0.200)	7.6(0.300)
4	7.62(0.300)	10.2(0.400)
5	10.16(0.400)	12.7(0.500)
6	12.70(0.500)	15.2(0.600)
7	15.24(0.600)	17.9(0.700)
8	17.78(0.700)	20.4(0.800)
9	20.32(0.800)	23.0(0.900)
10	22.86(0.900)	25.5(1.000)
11	25.40(1.000)	28.1(1.100)
12	27.94(1.100)	30.6(1.200)

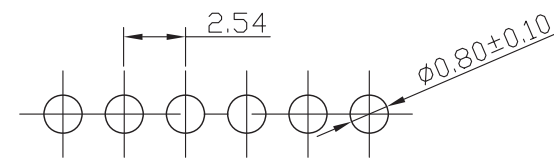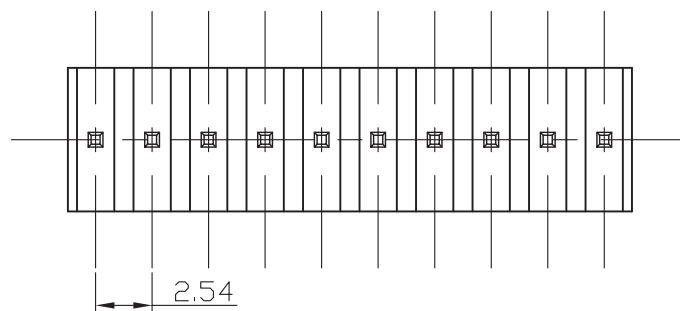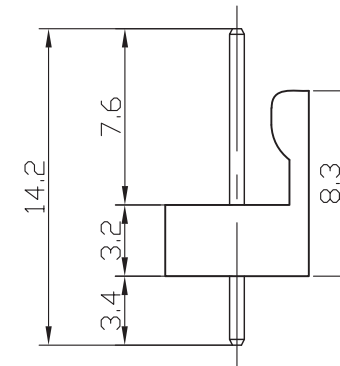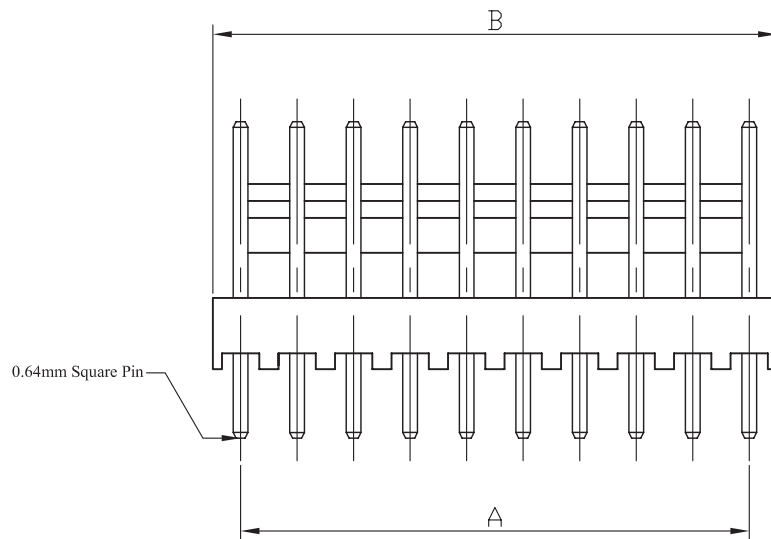

RECOMMENDED P.C. BOARD HOLE DIMM.

GENERAL TOLERANCE .X ± 0.5 .XX ± 0.1	DATE H. D. LI	PART NO WB254011-XXS1-WN-B
	DESIGN H. D. LI	TITLE 2.54 Wafer Wire to Board Header DIP 180° Type (白色短靠背)
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.