

SPECIFICATIONS

Voltage Rating : 250V AC/DC

Current Rating : 7A AC/DC

Insulator resistance : 1000 MΩ min

Withstanding Voltage : 1500 AC / minute

Temperature Range : -25°C to +85°C

Contact Resistance : 20 mΩ max.

MATERIAL :

Contact : Brass, Tin Plated

Base : Nylon 66 UL94V-2

Pack-ance : 1000 Pcs/Bag

ORDER INFORMATION:WB396W - $\frac{XX}{a}$ V - $\frac{X}{b}$

a. Pin of numbers:

02 ~ 14

b. Pack :

T : Tube


R : Reel



B : Bag

C : Contron


VERSION & EC DESCRIPTION

DATE	VERSION	PAGE	DESCRIPTION
2004/05/03	A	2-3	Add WB396W-XXV Plan

GENERAL TOLERANCE .X ± 0.3 .XX ± 0.20 .XXX ± 0.10	DRAW DATE	2004/05/03 H. D. LI	PART NO	WB 396W - XX V - X
	DESIGN	H. D. LI	TITLE	3.96 Wafer WType XXPIN 180度
	CHECKED	Y. M. LU		
	APPROVED	J. F. KANG		
UNIT :mm				 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.

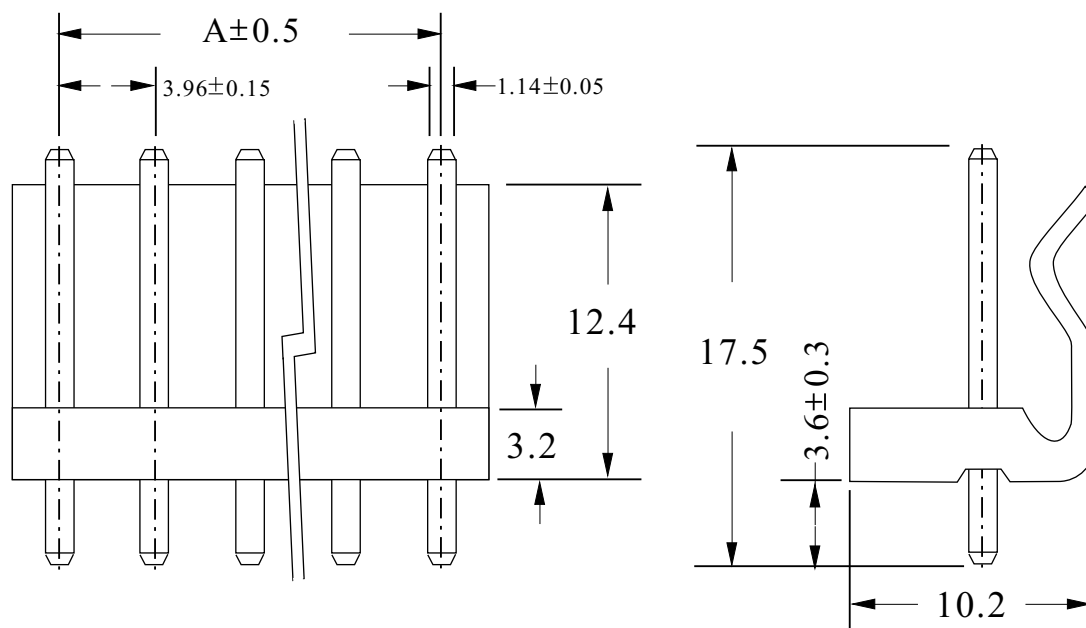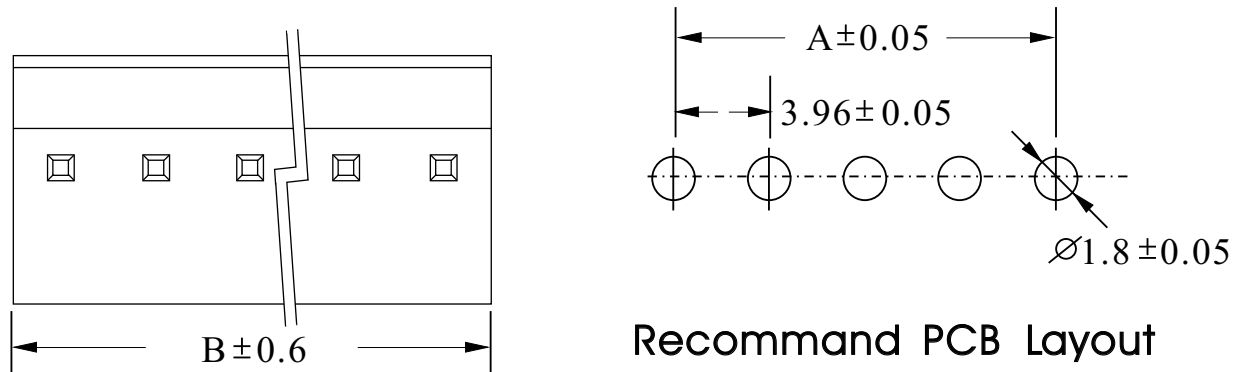

Poles	A	B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44

GENAL TOLERANCE .X ± 0.3 .XX ± 0.20 .XXX ± 0.10	DRAW 2004/05/03 DATE H. D. LI	PART NO WB 396W - XX V - X
	DESIGN H. D. LI	TITLE 3.96 Wafer WType XXPIN 180度
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.