

SPECIFICATIONS

Voltage Rating : 250V AC/DC

Current Rating : 7A AC/DC

Insulator resistance : 1000 M Ω min

Withstanding Voltage : 1500 AC / minute

Temperature Range : -25 $^{\circ}$ C to +85 $^{\circ}$ C

Contact Resistance : 20 m Ω max.

MATERIAL :

Contact : Brass, Tin Plated

Base : Nylon 66 UL94V-2

Pack-ance : 1000 Pcs/Bag

ORDER INFORMATION:

WB396W - $\frac{XX}{a}$ H - $\frac{X}{b}$

a. Pin of numbers:

02 ~ 14

b. Pack :

T : Tube


R : Reel



B : Bag

C : Contron



VERSION & EC DESCRIPTION

DATE	VERSION	PAGE	DESCRIPTION
2004/05/03	A	4-5	Add WB396W-XXH Plan

GENERAL TOLERANCE	DRAW DATE	2004/05/03 H. D. LI	PART NO
X \pm 0.3	DESIGN	H. D. LI	WB 396W - XX H - X
.X \pm 0.2	CHECKED	Y. M. LU	TITLE
.XX \pm 0.15	APPROVED	J. F. KANG	3.96 Wafer WType XXPIN 90度
.XXX \pm 0.10	UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.

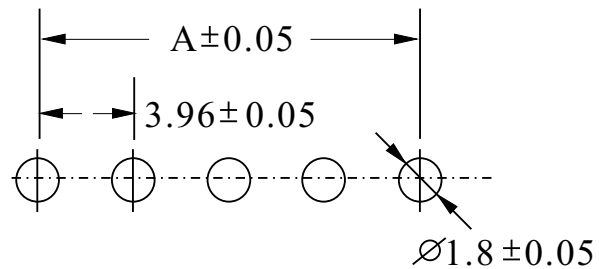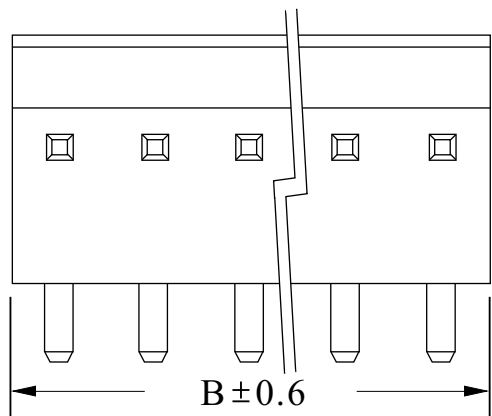

Recommand PCB Layout

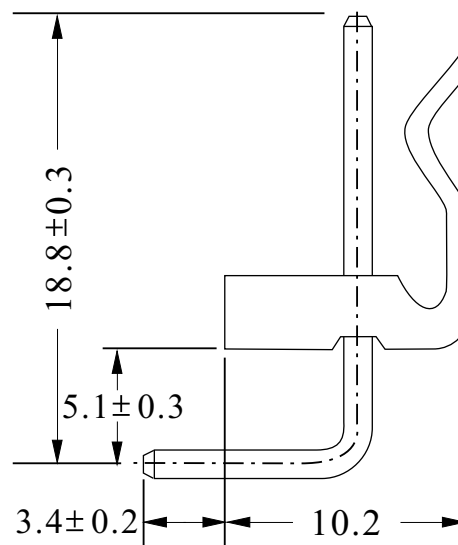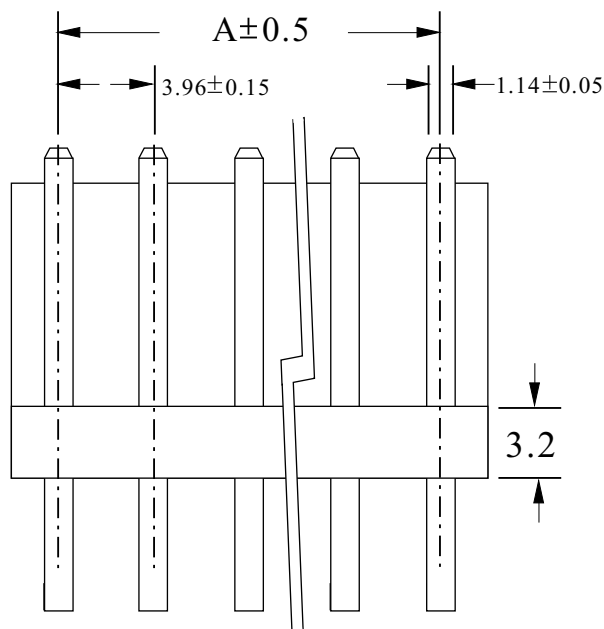

Poles	A	B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44

GENAL TOLERANCE X ± 0.3 .X ± 0.2 .XX ± 0.15 .XXX ± 0.10	DRAW DATE 2004/05/03 H. D. LI	PART NO WB 396W - XX H - X
	DESIGN H. D. LI	TITLE 3.96 Wafer WType XXPIN 90度
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	宏揚精密有限公司 HOJAR PRECISION CO. : LTD.