

SPECIFICATIONS

Voltage Rating : 250V AC/DC

Current Rating : 7A AC/DC

Insulator resistance : 1000 MΩ min

Withstanding Voltage : 1500 AC / minute

Temperature Range : -25°C to +85°C

Contact Resistance : 20 mΩ max.

MATERIAL :

Contact : Brass, Tin Plated

Base : Nylon 66 UL94V-2

Pack-ance : 1000 Pcs/Bag

ORDER INFORMATION:

WB396V - $\frac{XX}{a}$ H - $\frac{X}{b}$

a. Pin of numbers:

02 ~ 15

b. Pack :

T : Tube


R : Reel


B : Bag

C : Contron


VERSION & EC DESCRIPTION

DATE	VERSION	PAGE	DESCRIPTION
2004/05/03	A	8-9	Add WB396V-XXH Plan


GENAL TOLERANCE	DRAW DATE	2004/05/03 H. D. LI	PART NO
.X ± 0.3	DESIGN	H. D. LI	WB396V - XX H - X
.XX ± 0.2	CHECKED	Y. M. LU	TITLE
.XXX ± 0.1	APPROVED	J. F. KANG	3.96 Wafer VH Type XXPIN 90度
UNIT :mm			 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.

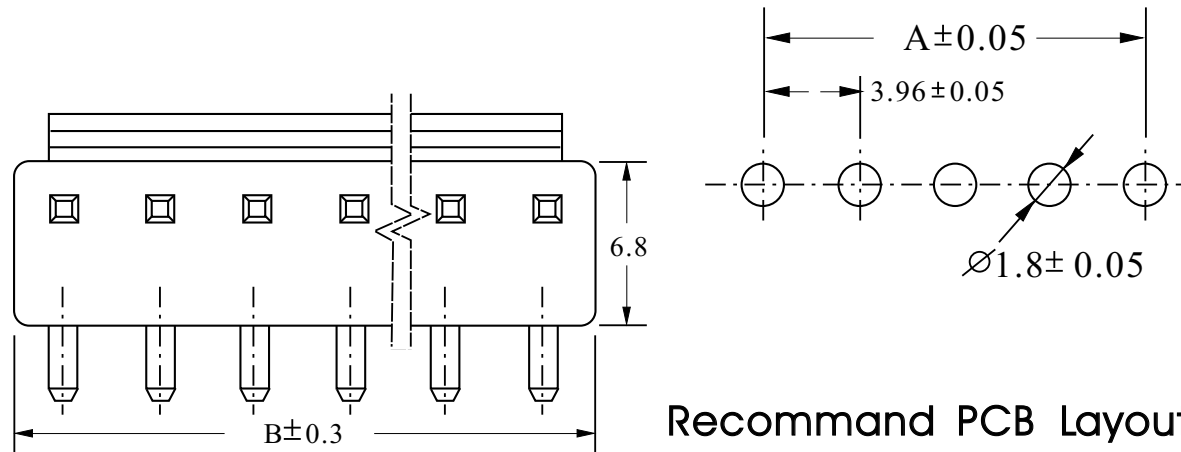

Recommend PCB Layout

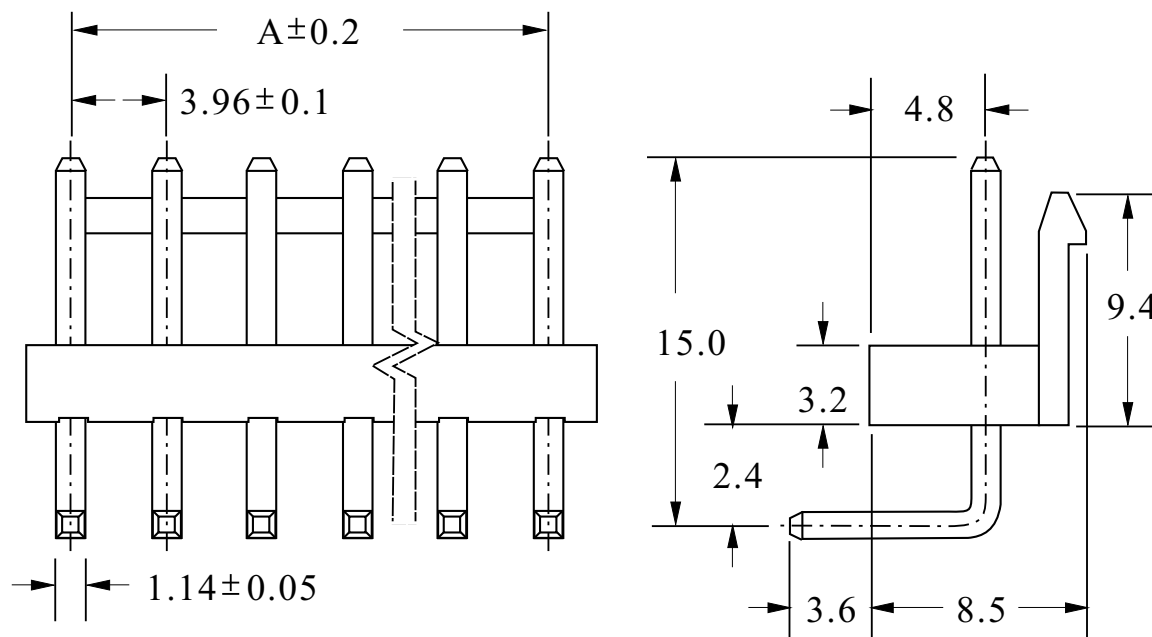

Poles	A	B
2	3.96	7.86
3	7.92	11.82
4	11.88	15.78
5	15.84	19.74
6	19.80	23.70
7	23.76	27.66
8	27.72	31.62
9	31.68	35.58
10	35.64	39.54
11	39.60	43.50
12	43.56	47.46
13	47.52	51.42
14	51.48	55.38
15	55.44	59.34

GENAL TOLERANCE .X ± 0.3 .XX ± 0.2 .XXX ± 0.1	DRAW DATE 2004/05/03 H. D. LI	PART NO WB396V - XX H - X
	DESIGN H. D. LI	TITLE 3.96 Wafer VH Type XXPIN 90度
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.