

SPECIFICATIONS

Current Rating : 7 AMP

Voltage Rating : 250V

Temperature Range : -25°C to +85°C

Contact Resistance : 20 mΩ Max at DC 100mA

Insulator Resistance : 5000 MΩ min at DC 500V

Dielectric Voltage : 500V AC / minute

Material : Nylon 66

Contact Pin : Brass

ORDER INFORMATION:

$$\text{WB396B} - \frac{12}{a} \text{V} - \frac{0}{b} - \frac{C}{c}$$

a. Pin of numbers:

12

b. Post selection:

0 : None Post

c. Pack :

T : Tube

R : Reel

B : Bag

C : Contron





VERSION & EC DESCRIPTION

DATE	VERSION	PAGE	DESCRIPTION
2005/04/18	A	10-11	Add WB396B-12V-0-C Plan


GENERAL TOLERANCE .X ± 0.8 .XX ± 0.5	DRAW DATE	2005/04/18 H. D. LI	PART NO	WB396B - 12 1 - 0 - C
	DESIGN	H. D. LI	TITLE	Power Base 12P 180W 3.96mm 鍍錫 無柱
	CHECKED	Y. M. LU		
	APPROVED	J. F. KANG		
UNIT :mm				



宏揚精密有限公司
HOJAR PRECISION CO. : LTD.

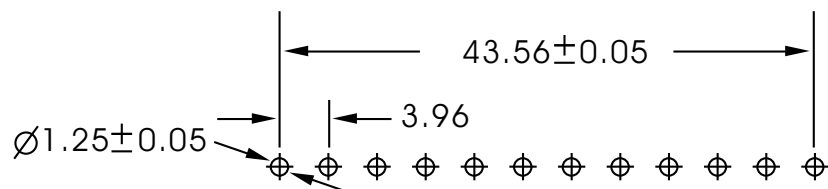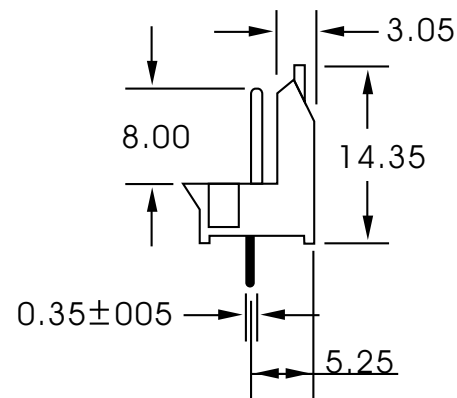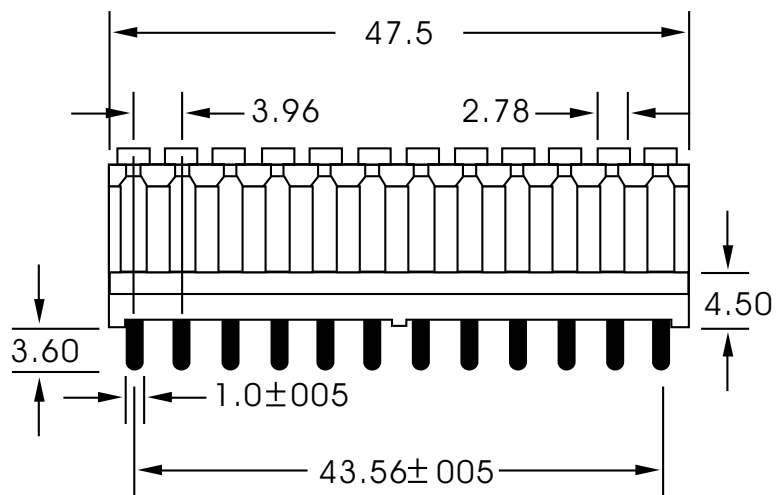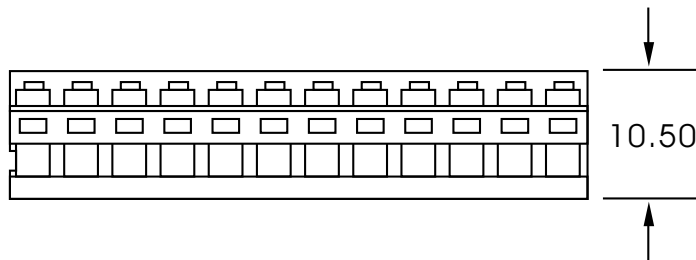

RECOMMENDED P.C.BOARD HOLE DIM.

GENERAL TOLERANCE .X ± 0.8 .XX ± 0.5	DRAW 2005/04/18 DATE H. D. LI	PART NO WB396B - 12 1 - 0 - C
	DESIGN H. D. LI	TITLE Power Base 12P 180W 3.96mm 鍍錫 無柱
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.