

SPECIFICATIONS

Current Rating : 7 AMP

Voltage Rating : 250V

Temperature Range : -25°C to +85°C

Contact Resistance : 20 mΩ Max at DC 100mA

Insulator Resistance : 5000 MΩ min at DC 500V

Dielectric Voltage : 500V AC / minute

Material : Nylon 66

Contact Pin : Brass

ORDER INFORMATION:

$$\text{WB396B} - \frac{12}{a} \text{V} - \frac{1}{b} - \frac{C}{c}$$

a. Pin of numbers:
12

b. Post selection:
1 : Inside Post

c. Pack :
T : Tube


R : Reel



B : Bag

C : Contron

VERSION & EC DESCRIPTION

DATE	VERSION	PAGE	DESCRIPTION
2005/04/18	A	12-13	Add WB396B-12V-1-C Plan

GENERAL TOLERANCE	DRAW DATE	2005/04/18	PART NO
.X ± 0.3	H. D. LI		WB396B - 12 1 - 1 - C
.XX ± 0.2	DESIGN	H. D. LI	TITLE
.XXX ± 0.1	CHECKED	Y. M. LU	Power Base 12P 180W 3.96mm 鍍錫 有柱
	APPROVED	J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.
UNIT :mm			

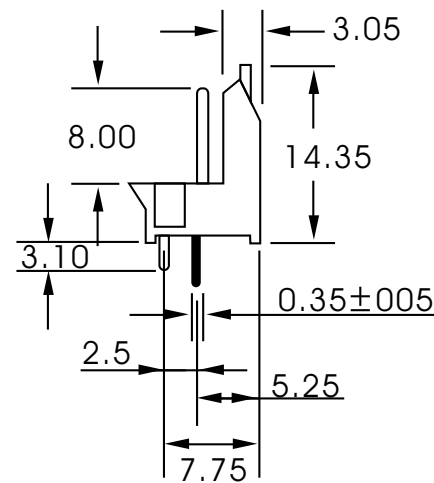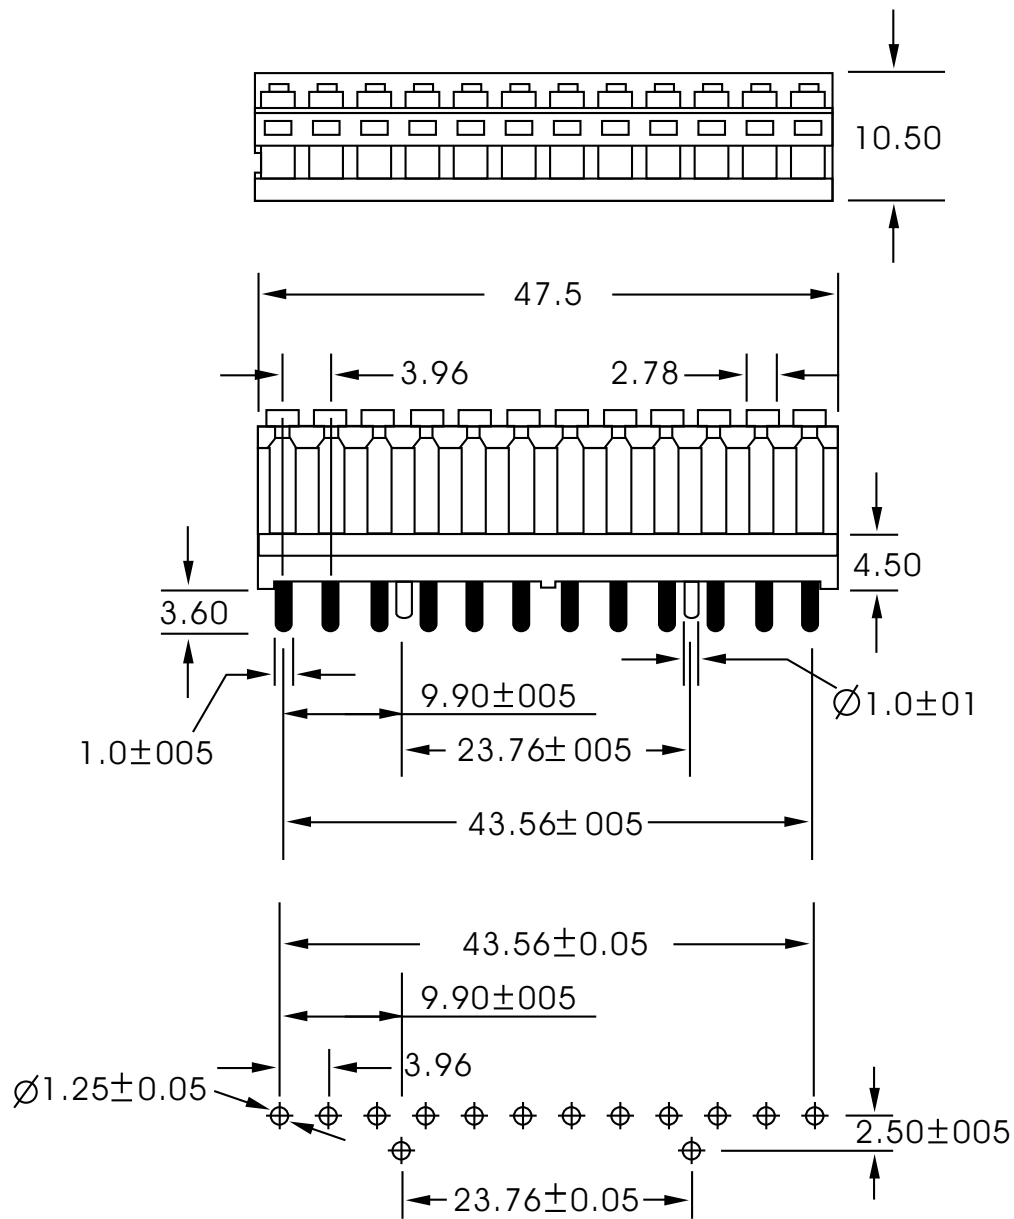

RECOMMENDED P.C.BOARD HOLE DIM.

GENAL TOLERANCE .X ± 0.3 .XX ± 0.2 .XXX ± 0.1	DRAW 2005/04/18 DATE H. D. LI	PART NO WB396B - 12 1 - 1 - C
	DESIGN H. D. LI	TITLE Power Base 12P 180W 3.96mm 鍍錫 有柱
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	宏揚精密有限公司 HOJAR PRECISION CO., LTD.