

## Specifications

### Electrical

Current Rating: 5A AC, DC

Voltage Rating: 250V AC, DC

Operating Temp.: -25°C ~ +85°C

Insulation Resistance: 1000MΩ/ min.

Dielectric Withstanding Voltage: 1500V AC/ min.

Contact Resistance: 10mΩ/ max.

### Material

Material: Nylon66, UL94V-2

## ORDER INFORMATION:

$$\text{WB396} - \frac{\text{XX}}{\text{a}} \text{V} - \text{A/B} - \frac{\text{X}}{\text{b}}$$

a. Pin of numbers:

02 ~ 20

b. Pack :

T : Tube


R : Reel





B : Bag

C : Contron

### VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2005/06/16	A	14-15	Add WB396-XXV-A/B-X Plan

GENAL TOLERANCE	DRAW DATE	2005/06/16 H. D. LI	PART NO
.X ± 0.5	DESIGN	H. D. LI	WB396 - XX V - A/B - X
.XX ± 0.1	CHECKED	Y. M. LU	TITLE
	APPROVED	J. F. KANG	3.96 Wafer DIP Type XXPIN 180度無靠背
UNIT :mm			 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.

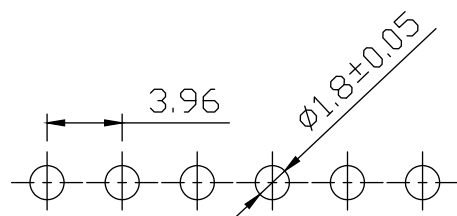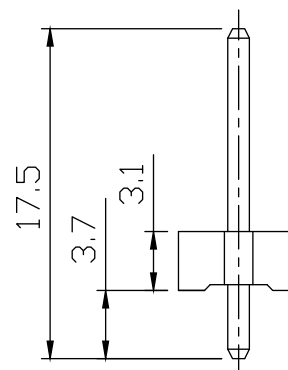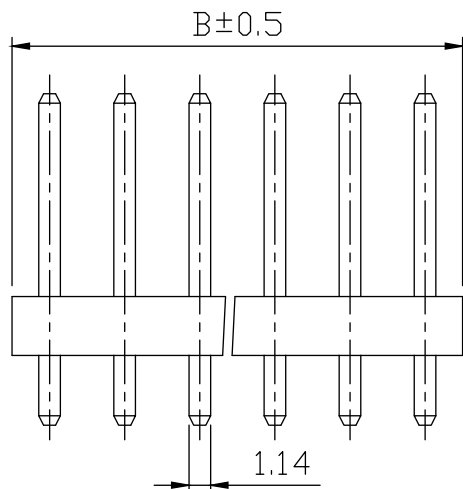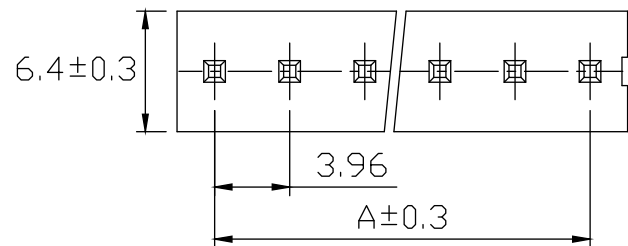

**P.C.B Layout**

Poles	Dimension mm (in.)		Note.
	A	B	
2	3.96	8.00	
3	7.92	12.00	
4	11.88	15.90	
5	15.84	20.00	
6	19.80	24.00	
7	23.76	27.90	
8	27.72	31.90	
9	31.86	35.80	
10	35.64	39.90	
11	39.60	43.90	
12	43.56	47.80	
13	47.52	51.80	
14	51.48	55.70	
15	55.44	59.80	
16	59.40	63.80	
17	63.36	67.70	
18	67.32	71.70	
19	71.28	75.60	
20	75.24	79.80	

GENAL TOLERANCE .X ± 0.5 .XX ± 0.1	DRAW DATE	2005/06/16 H. D. LI	PART NO <b>WB396 - XX V - A/B - X</b>
	DESIGN	H. D. LI	
	CHECKED	Y. M. LU	 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.
UNIT :mm	APPROVED	J. F. KANG	