

ORDER INFORMATION:

HS125027- XXA - B
a

a. Pin of numbers:


2~16、18、20、22、24、26、28、30




■ SPECIFICATIONS

- Voltage Rating : 125 V AC/DC
- Current Rating : 1A AC/DC
- Withstanding Voltage : 250V AC/minute
- Insulation Resistance : 100M Ω min
- Temperature Range : - 25 $^{\circ}$ C to + 85 $^{\circ}$ C
- Contact Resistance : 20m Ω max


■ HOUSING

- Material : PBT UL94V-0
- Q' ty : 1,000 pcs./PVC Box

GENAL TOLERANCE .X \pm 0.3 .XX \pm 0.2 .XXX \pm 0.1	DATE H. D. LI	PART NO HS125027-XXA-B
	DESIGN H. D. LI	TITLE 1.25mm Crimp Style Connectors Housing (SMT)
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

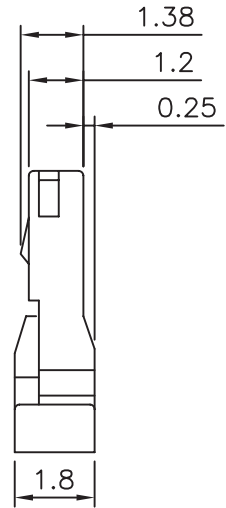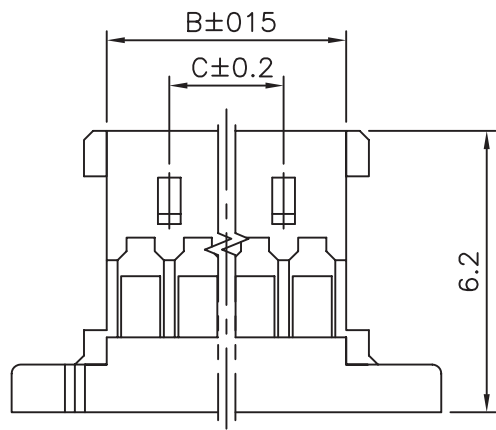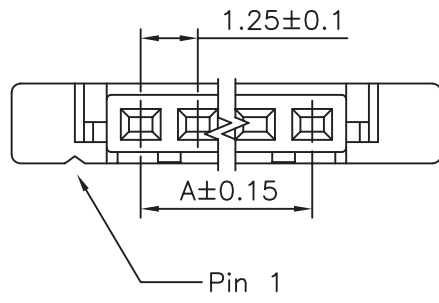

Poles	Dimensions (mm)		
	A	B	C
2	1.25	2.70	-----
3	2.50	3.95	-----
4	3.75	5.20	2.50
5	5.00	6.45	3.75
6	6.25	7.70	5.00
7	7.50	8.95	6.25
8	8.75	10.20	7.50
9	10.00	11.45	8.75
10	11.25	12.70	10.00
11	12.50	13.95	11.25
12	13.75	15.20	12.50
13	15.00	16.45	13.75
14	16.25	17.70	15.00
15	17.50	18.95	16.25
16	18.75	20.20	17.50
18	21.25	22.70	20.00
20	23.75	25.20	22.50
22	26.25	27.70	22.50
24	28.75	30.20	22.50
26	31.25	32.70	22.50
28	33.75	35.20	22.50
30	36.25	37.70	22.50

GENAL TOLERANCE .X ± 0.3 .XX ± 0.2 .XXX ± 0.1	DATE	H. D. LI	PART NO
	DESIGN	H. D. LI	HS125027-XXA-B
	CHECKED	Y. M. LU	TITLE
	APPROVED	J. F. KANG	1.25mm Crimp Style Connectors Housing (SMT)
UNIT :mm			 宏揚精密有限公司 HOJAR PRECISION CO., LTD.