

ORDER INFORMATION:

HS125027-XXB - B
a


a. Pin of numbers:
2~10、12、20、25、30




■ SPECIFICATIONS

- Voltage Rating : 100 V AC/DC
- Current Rating : 1A AC/DC
- Withstanding Voltage : 500V AC/minute
- Insulation Resistance : 500M Ω min
- Temperature Range : - 25 $^{\circ}$ C to + 85 $^{\circ}$ C
- Contact Resistance : 20m Ω max

■ HOUSING

- Material : Nylon 66 UL94V-0
- Q' ty : 1,000 pcs./Bag

GENERAL TOLERANCE .X \pm 0.3 .XX \pm 0.2 .XXX \pm 0.1	DATE H. D. LI	PART NO HS125027-XXB-B
	DESIGN H. D. LI	TITLE 1.25mm Crimp Style Connectors Housing (SMT)
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

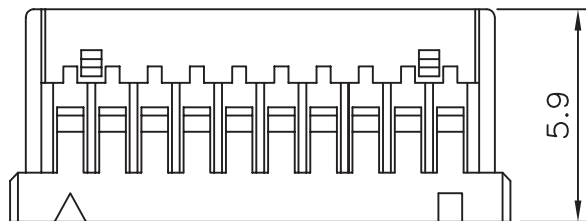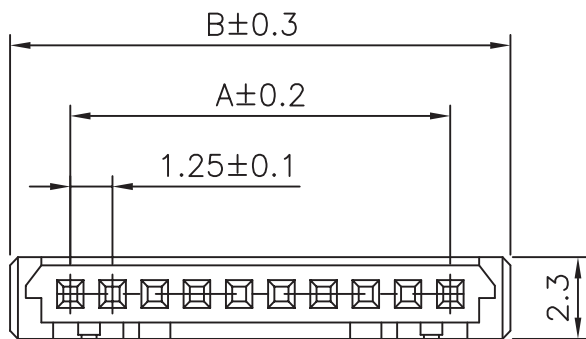

Poles	Dimensions (mm)	
	A	B
2	1.25	4.45
3	2.50	5.70
4	3.75	6.95
5	5.00	8.20
6	6.25	9.45
7	7.50	10.70
8	8.75	11.95
9	10.00	13.20
10	11.25	14.45
12	13.75	16.95
20	23.75	26.95
25	30.00	33.20
30	36.25	39.45

GENAL TOLERANCE .X ± 0.3 .XX ± 0.2 .XXX ± 0.1	DATE	H. D. LI	PART NO HS125027-XXB-B
	DESIGN	H. D. LI	
	CHECKED	Y. M. LU	1.25mm Crimp Style Connectors Housing (SMT)
	APPROVED	J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.
UNIT :mm			