

## ORDER INFORMATION:

### ■ SPECIFICATIONS

- Voltage Rating : 100V AC/DC
- Current Rating : 1A AC/DC
- Withstanding Voltage : 500V AC/minute
- Insulation Resistance : 500M $\Omega$  min
- Temperature Range : - 25 $^{\circ}$ C to + 85 $^{\circ}$ C
- Contact Resistance : 20m $\Omega$  max


### ■ HOUSING

- Material : Nylon 66 UL94V-O
- Q' ty : 1000 pcs./Bag


HS125027-XXC - B  
a

- a. Pin of numbers:  
2~15、20、25、30

GENERAL TOLERANCE .X $\pm$ 0.3 .XX $\pm$ 0.2 .XXX $\pm$ 0.1	DATE H. D. LI	PART NO HS125027-XXC-B
	DESIGN H. D. LI	TITLE 1.25mm Housing (JAE DF 13)
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

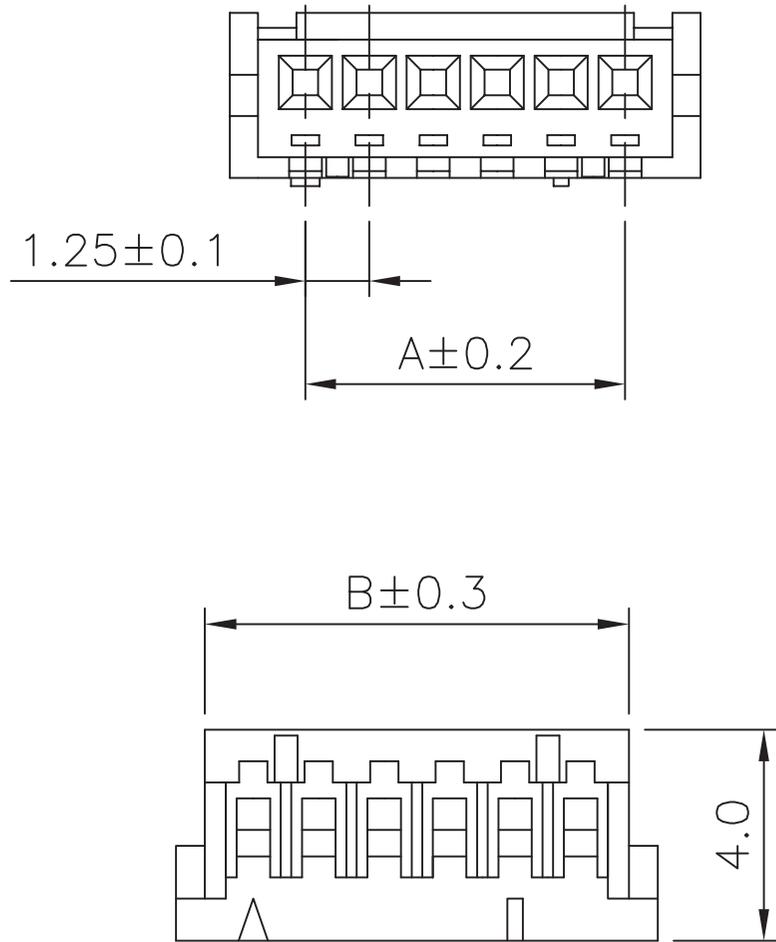

Poles	Dimensions(mm)	
	A	B
2	1.25	3.05
3	2.50	4.30
4	3.75	5.55
5	5.00	6.80
6	6.25	8.05
7	7.50	9.30
8	8.75	10.55
9	10.00	11.80
10	11.25	13.05
11	12.50	14.30
12	13.75	15.55
13	15.00	16.80
14	16.25	18.05
15	17.50	19.30
20	23.75	25.55
25	30.00	31.80
30	36.25	38.05

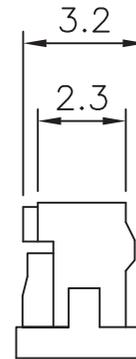

GENAL TOLERANCE .X ± 0.3 .XX ± 0.2 .XXX ± 0.1	DATE	H. D. LI	PART NO HS125027-XXC-B
	DESIGN	H. D. LI	
	CHECKED	Y. M. LU	1.25mm Housing (JAE DF 13)
	APPROVED	J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.
UNIT :mm			