

Specification:

Voltage Rating:250V AC,DC

Current Rating:2.5A

Withstand Voltage:800V AC/minute

Contact Resistance:20MΩ Max

Insulation Resistance:1000MΩ Min

Operating Temp:-25°C ~ +85°C

Applicable P.C.B Hole dia:Ø1.20±0.05


Applicable Wire Range:AWG #22~#28




Material: Nylon 66,UL94V-0

ORDER INFORMATION:


HS250 - $\frac{XX}{a} 2$


a. Pin of numbers:
02 ~ 20

GENERAL TOLERANCE .X ± 0.5 .XX ± 0.1	DRAW DATE 2005/02/23 H. D. LI	PART NO HS250-XX2
	DESIGN H. D. LI	TITLE 杜邦2.5mm Housing
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

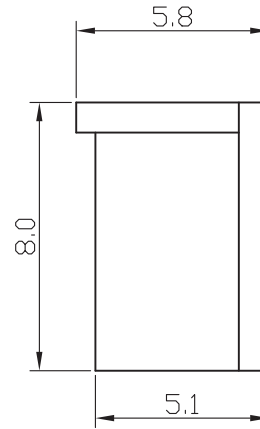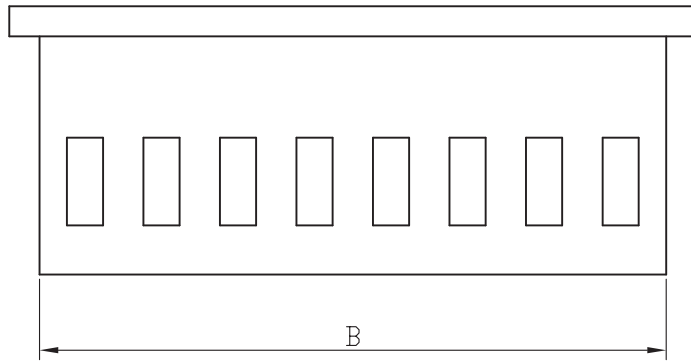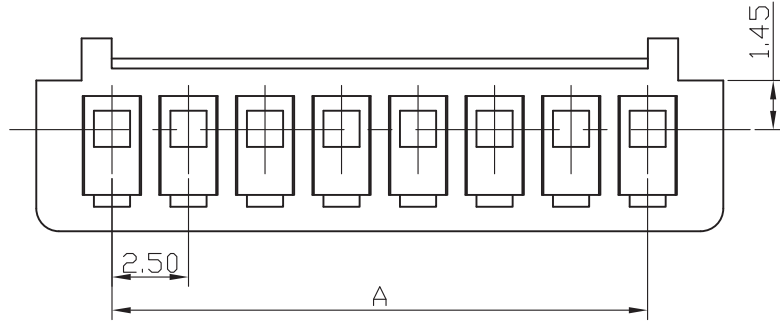

Poles	Dimension mm	
	A	B
2	2.5	6.0
3	5.0	8.5
4	7.5	11.0
5	10.0	13.5
6	12.5	16.0
7	15.0	18.5
8	17.5	21.0
9	20.0	23.5
10	22.5	26
11	25.0	28.5
12	27.5	31.0
13	30.0	33.5
14	32.5	36
15	35.0	38.5
16	37.5	41.0
17	40.0	43.5
18	42.5	46.0
19	45.0	48.5
20	47.5	51.0

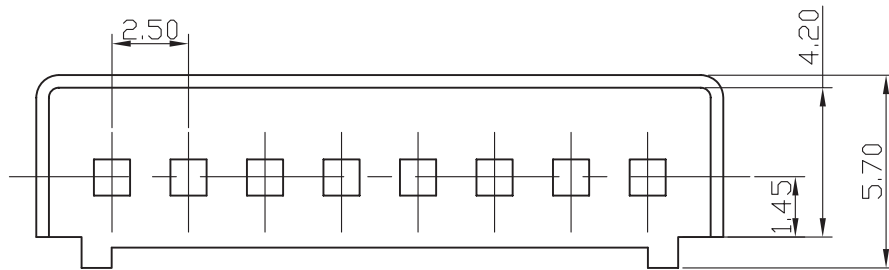

GENAL TOLERANCE .X ± 0.5 .XX ± 0.1	DRAW DATE 2005/02/23 H. D. LI	PART NO HS250-XX2
	DESIGN H. D. LI	TITLE 杜邦2.5mm Housing
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.