


ORDER INFORMATION:




HS250 - $\frac{XX}{a}$ 3

a. Pin of numbers:
02~15


SPECIFICATIONS

Current rating : 2.5A AC,DC
Voltage rating : 250V AC,DC
Temperature range : -25°C to +85 °C
Contact resistance : 10mΩ Max.
Insulation resistance : 1000MΩ Min.
Withstanding voltage : 800V AC/minute
Material : Nylon 66, UL94V-0

GENAL TOLERANCE	DATE H. C. SU	PART NO HS250-XX3
.X ± 0.5 .XX ± 0.1	DESIGN H. D. LI	TITLE 2.5mm Wire-to-Board Housing EH TYPE
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

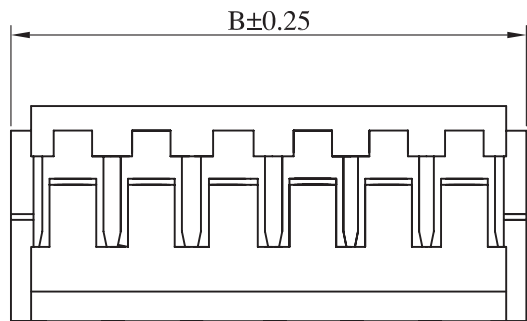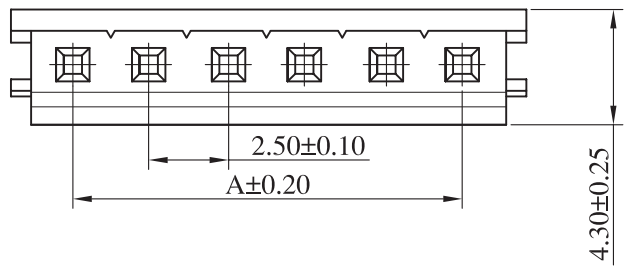

Poles	Dimension (mm)	
	A	B
2	2.50	7.00
3	5.00	9.50
4	7.50	12.00
5	10.00	14.50
6	12.50	17.00
7	15.00	19.50
8	17.50	22.00
9	20.00	24.50
10	22.50	27.00
11	25.00	29.50
12	27.50	32.00
13	30.00	34.50
14	32.50	37.00
15	35.00	39.50

GENAL TOLERANCE .X ± 0.5 .XX ± 0.1	DATE H. C. SU	PART NO HS250-XX3
	DESIGN H. D. LI	TITLE 2.5mm Wire-to-Board Housing EH TYPE
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.