

ORDER INFORMATION:

HS125 - $\frac{XX}{a}$ 3


a. Pin of numbers:
02 ~ 18





Specification

Electrical
 Voltage Rating: 250V (AC)
 Current Rating: 3A
 Contact Resistance: 30mΩ max.
 Dielectric Withstanding Voltage: 600V AC/1min.
 Insulation Resistance: 1000MΩ min

Material

Insulator: P.B.T. UL94V-0
 Temperature Range: -25°C ~ +105°C

GENAL TOLERANCE .X ± 0.5 .XX ± 0.1	DRAW H. D. LI	PART NO HS254-XX3
	DESIGN H. D. LI	TITLE Housing Pitch 2.54mm (CR-254)
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

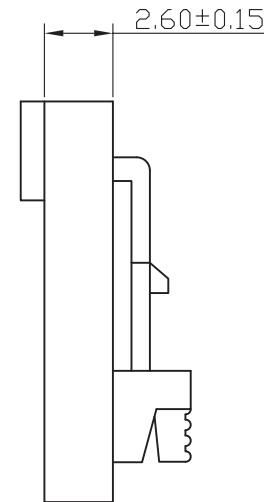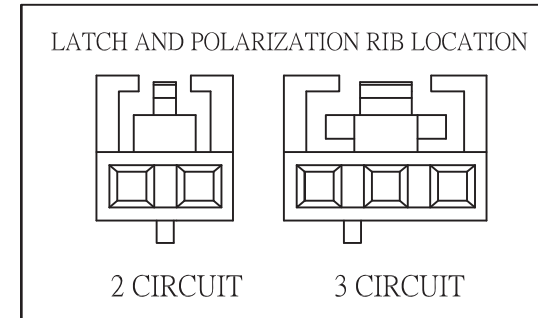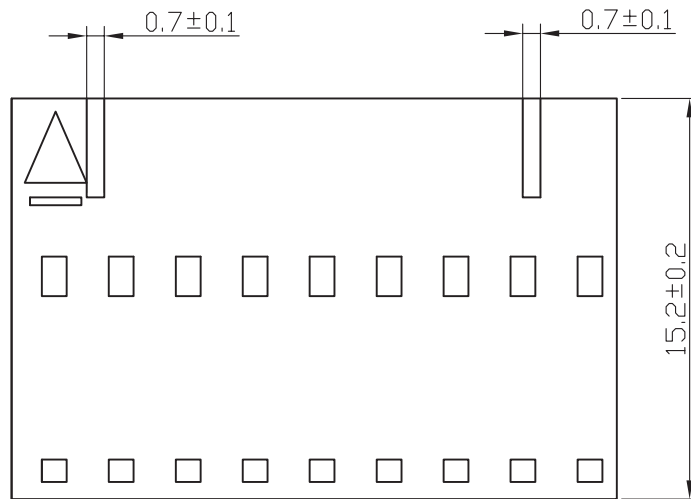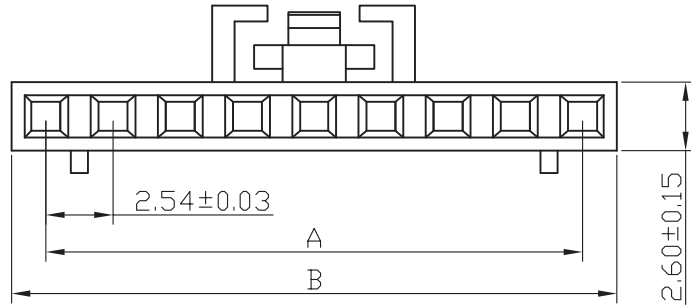

Poles	Dimension mm (in.)	
	A	B
2	2.54(0.100)	5.18(0.204)
3	5.08(0.200)	7.72(0.304)
4	7.62(0.300)	10.26(0.404)
5	10.16(0.400)	12.80(0.504)
6	12.70(0.500)	15.34(0.604)
7	15.24(0.600)	17.88(0.704)
8	17.78(0.700)	20.42(0.804)
9	20.32(0.800)	22.96(0.904)
10	22.86(0.900)	25.50(1.004)
11	25.40(1.000)	28.04(1.104)
12	27.94(1.100)	30.58(1.204)
13	30.48(1.200)	33.12(1.304)
14	33.02(1.300)	35.66(1.404)
15	35.56(1.400)	38.20(1.504)
16	38.10(1.500)	40.74(1.604)
17	40.64(1.600)	43.28(1.704)
18	43.18(1.700)	45.82(1.804)

註B尺寸公差:

2P~10P ±0.25 10P~15P ±0.30 16P以上 ±0.40

GENAL TOLERANCE	DRAW	H. D. LI	PART NO	HS254-XX3
	.X ± 0.5 .XX ± 0.1	DESIGN		
	CHECKED	Y. M. LU	TITLE	
	APPROVED	J. F. KANG	Housing Pitch 2.54mm (CR-254)	
UNIT :mm			宏揚精密有限公司 HOJAR PRECISION CO., LTD.	