

SPECIFICATIONS

Current Rating: 1A AC, DC
Voltage Rating: 125V AC/ max.
Operating Temp.: -40°C ~ +85°C
Insulation Resistance: 100MΩ/ min.
Dielectric Withstanding Voltage: 250V AC/ min.
Contact Resistance: 20MΩ/ max.


MATERIAL :




Material: Nylon66, UL94V-0


ORDER INFORMATION:

HS254 - $\frac{XX}{a}$ 4

a. Pin of numbers:
04

GENAL TOLERANCE .X ± 0.5 .XX ± 0.1	DRAW DATE 2005/01/20 H. D. LI	PART NO HS254-XX4
	DESIGN H. D. LI	TITLE 2.54mm 小4P Housing
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

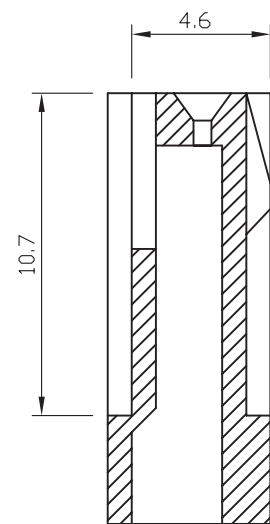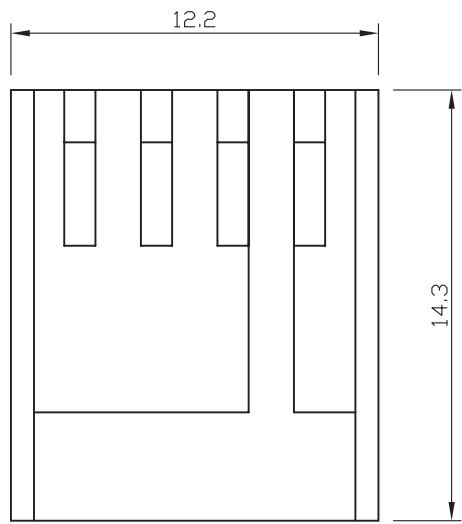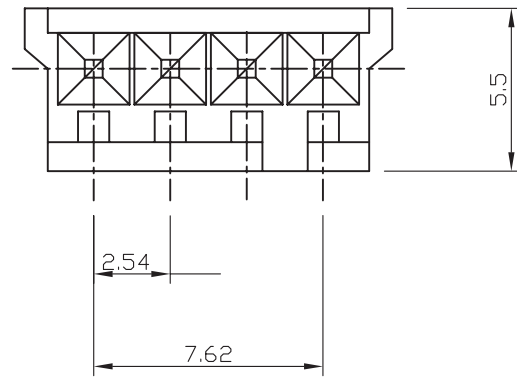

GENERAL TOLERANCE .X ± 0.5 .XX ± 0.1	DRAW DATE	2005/01/20 H. D. LI	PART NO	HS254-XX4
	DESIGN	H. D. LI	TITLE	2.54mm 小4P Housing
	CHECKED	Y. M. LU		
	APPROVED	J. F. KANG		
UNIT :mm				 宏揚精密有限公司 HOJAR PRECISION CO., LTD.