

ORDER INFORMATION:

HS508 - $\frac{XX}{a}$ 1

a. Pin of numbers:
02~12

SPECIFICATIONS

Electrical

Current Rating: 5A AC, DC

Voltage Rating: 250V AC, DC

Operating Temp.: -25°C ~ +85°C


Insulation Resistance: 1000M Ω / min.




Dielectric Withstanding Voltage: 1500V AC/ min.

Contact Resistance: 10m Ω / max.


Material

Material: Nylon66, UL94V-2

GENAL TOLERANCE .X \pm 0.5 .XX \pm 0.1	DATE H. C. SU	PART NO HS508-XX1
	DESIGN H. D. LI	TITLE 5.08mm Wire-to-Board Housing
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

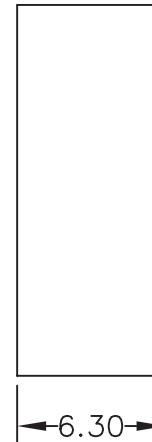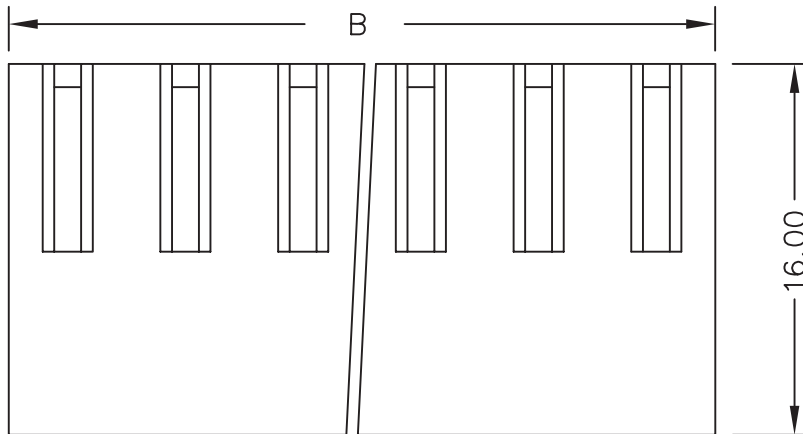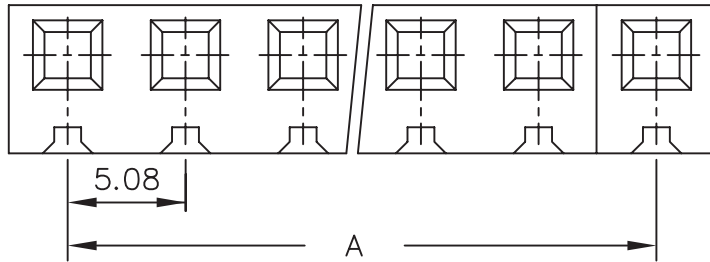

Poles	Dimension mm (in.)	
	A	B
2	5.08	10.16
3	10.16	15.24
4	15.24	20.32
5	20.32	25.40
6	25.40	30.48
7	30.48	35.56
8	35.56	40.64
9	40.64	45.72
10	45.72	50.80
11	50.80	55.88
12	55.88	60.96

GENAL TOLERANCE .X ± 0.5 .XX ± 0.1	DATE H. C. SU	PART NO HS508-XX1
	DESIGN H. D. LI	TITLE 5.08mm Wire-to-Board Housing
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.