

MATERIAL :

HOUSING : NYLON-66

CONTACT : Brass

CONTACT PLATING : TIN - LEAD 90/10 FOR ALL.

ORDER INFORMATION:

P4.2RE - $\frac{XX}{a}$ 1 - 0 0 - W


a. Pin of numbers:


2、4、6、8、10、12、

14、16、18、20、22、24




VERSION & EC DESCRIPTION

| DATE | VERSION | PAGE | DESCRIPTION |
|------------|---------|-------|--------------------------------|
| 2004/11/17 | A | 14-15 | Add P4.2RE - XX1 - 00 - W Plan |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

| | | |
|-----------------|---------------------|--|
| GENAL TOLERANCE | DRAW 2004/11/17 | PART NO |
| .X ± 0.35 | DATE H. D. LI | P4.2RE - XX 1 - 00 - W |
| .XX ± 0.10 | DESIGN H. D. LI | TITLE |
| | CHECKED Y. M. LU | MINI FIT CONN. R/A DIP TYPE 4.2mm PITCH |
| | APPROVED J. F. KANG |  宏揚精密有限公司 |
| UNIT :mm | | HOJAR PRECISION CO. : LTD. |

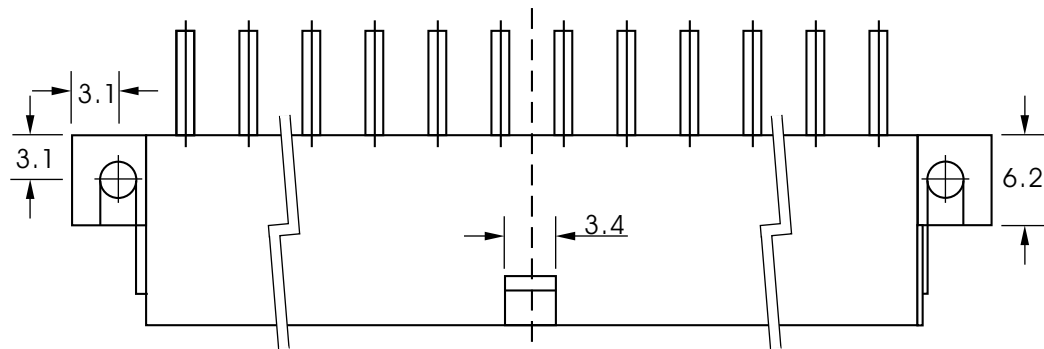

| Part NO | Dimension | | Part NO | Dimension | |
|---------|-----------|-------|---------|-----------|-------|
| | A | B | | A | B |
| 02 | 5.4 | | 14 | 30.8 | 25.20 |
| 04 | 9.6 | 4.20 | 16 | 35.0 | 29.40 |
| 05 | 13.9 | 8.40 | 18 | 39.2 | 33.60 |
| 08 | 18.1 | 12.60 | 20 | 43.4 | 37.80 |
| 10 | 22.3 | 16.80 | 22 | 47.6 | 42.00 |
| 12 | 26.5 | 21.00 | 24 | 51.8 | 46.20 |

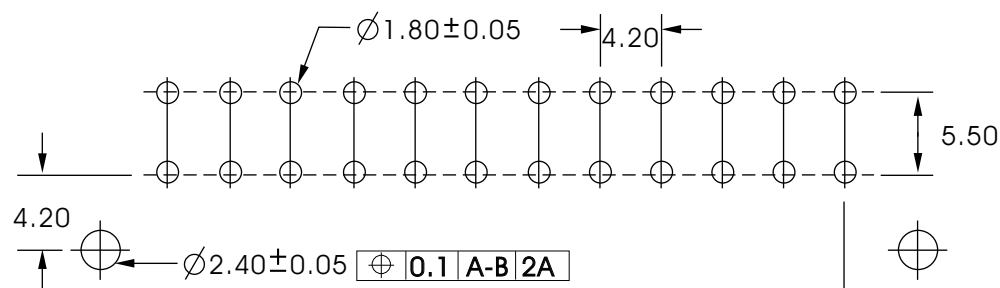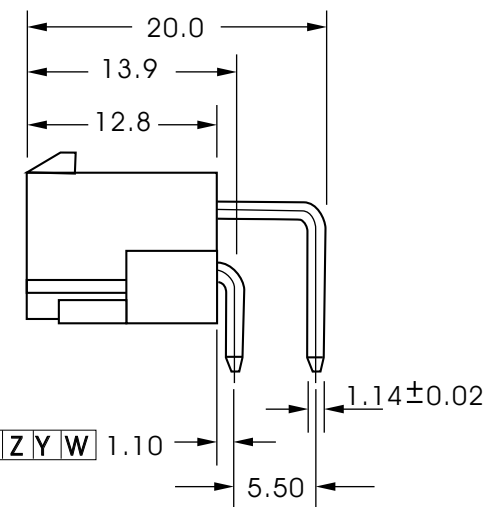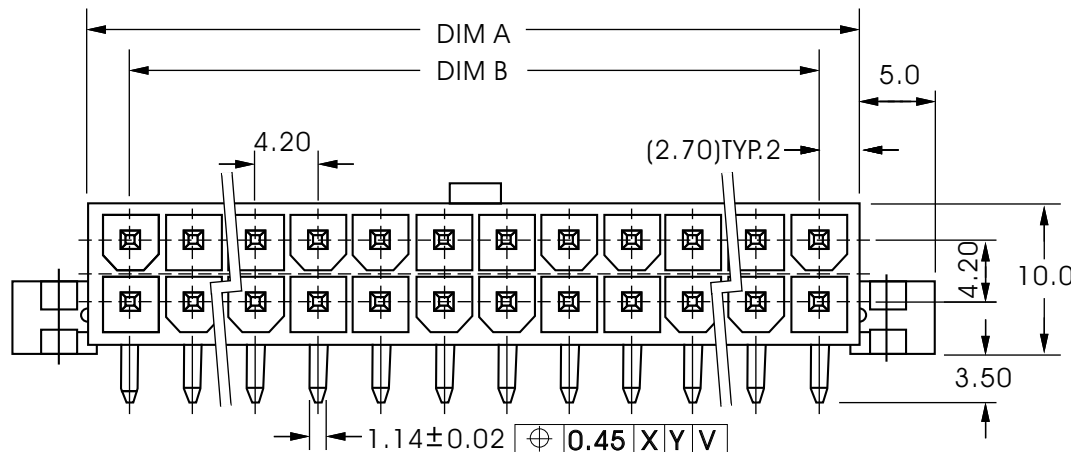

PCB LAYOUT

⊕ 0.45 X Y V
⊕ 0.45 Z Y W

| | | | | |
|--|-----------|------------------------|---------|---|
| GENERAL TOLERANCE .X ± 0.35 .XX ± 0.10 | DRAW DATE | 2004/11/17 H. D. LI | PART NO | P4.2RE - XX 1 - 00 - W |
| | DESIGN | H. D. LI | TITLE | MINI FIT CONN. R/A DIP TYPE 4.2mm PITCH |
| | CHECKED | Y. M. LU | | |
| | APPROVED | J. F. KANG | | |
| UNIT :mm | | | | |

宏揚精密有限公司
HOJAR PRECISION CO. : LTD.