

Specification:

Contact Resistance:30m Ohm Max.

Insulation Resistance: 1000M Ohm Min. At 500VDC.

Rated Voltage And Current:1.5A At 250VAC Minimum.

Dielectric Withstanding Voltage:

750V AC(ms)for 1 Minute(Rev.1.1)

500V AC(ms) for 1 Minute(Rev.2.0)

Durability(Life Test): 1500 Cycles

Insertion Force: 35 Newton Maximum.

Extraction Force: 10 Newton Minimum.

ORDER INFORMATION:

USBA1 - 041R - $\frac{X}{a}$ - $\frac{X}{b}$ $\frac{X}{c}$ - $\frac{X}{d}$

a. Plated selection :

1 : Gold Flash

2 : Gold 30u"

b. Plastic Color :

B : Black

W: White


c. Plastic material :






P : P.B.T (standard)

N : Nylon 9T


d. Pack selection:

D : Disk Pack

GENAL TOLERANCE X. ± 0.38 .X ± 0.25 .XX ± 0.13 .XXX ± 0.05	DATE H. D. LI	PART NO USBA1-041R-X-XX-X
	DESIGN H. D. LI	TITLE USB A REVERSE FLAT 4PIN DIP
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

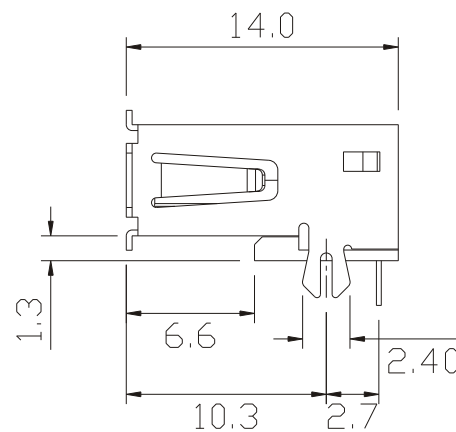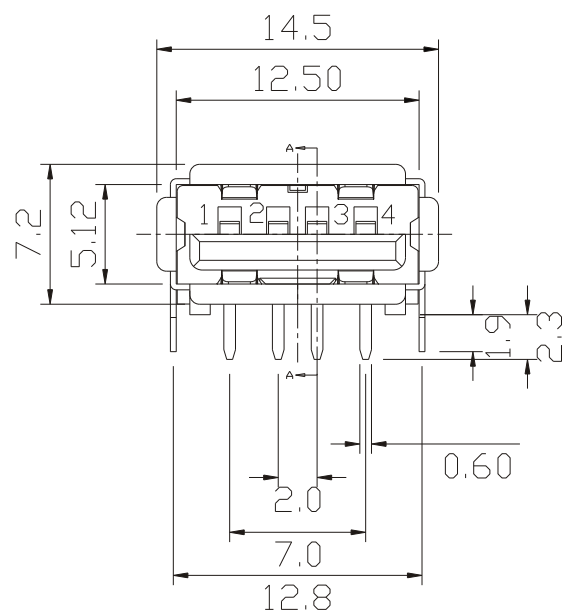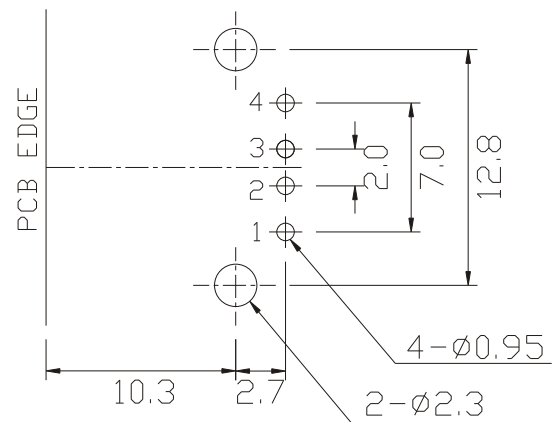

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	PBT G.F.	BLACK	1	
2	TERMINAL	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	4	Gold:1~3 μ " ; Ni:40~60 μ " ; TIN:120 μ " (100% pure Tin of lead free plating)
3	SHELL	BRASS T:0.3	NICKEL PLATED	1	Ni:80~120 μ "

GENAL TOLERANCE X. ± 0.38 .X ± 0.25 .XX ± 0.13 .XXX ± 0.05	DATE	H. D. LI	PART NO
	DESIGN	H. D. LI	USBA1-041R-X-XX-X
	CHECKED	Y. M. LU	TITLE
	APPROVED	J. F. KANG	USB A REVERSE FLAT 4PIN DIP
UNIT :mm			 宏揚精密有限公司 HOJAR PRECISION CO., LTD.