

**SPECIFICATIONS**

Current Rate: 5 Amps

Insulator Resistance : 1000M  $\Omega$  Min at 500V DC

Dielectric Strength : 1000V Per minute

Operation Temperature : -55°C ~ +105°C

**MATERIAL**

Insulator : P.B.T +30% Brass Fiber (UL94V-0)

Contact : Brass

Contact Plated : Gold Over Nickel

Shell : Steel, Zinc plated or Tin plated


**ORDER INFORMATION:**MDSUB - 25 2 -  $\frac{X}{a}$ 

a. Pack :

D : Disk Pack





**VERSION & EC DESCRIPTION**

| DATE       | VERSION | PAGE  | DESCRIPTION               |
|------------|---------|-------|---------------------------|
| 2005/02/25 | A       | 20-21 | Add MDSUB - 25 2 - X Plan |
|            |         |       |                           |
|            |         |       |                           |
|            |         |       |                           |
|            |         |       |                           |
|            |         |       |                           |
|            |         |       |                           |
|            |         |       |                           |


|                 |           |                        |  |
|-----------------|-----------|------------------------|--|
| GENAL TOLERANCE | DRAW DATE | 2005/02/25<br>H. D. LI | PART NO  |
| .X $\pm$ 0.5    | DESIGN    | H. D. LI               | MDSUB - 25 2 - X   |
| .XX $\pm$ 0.30  | CHECKED   | Y. M. LU               | TITLE  |
| .XXX $\pm$ X.XX | APPROVED  | J. F. KANG             | D-SUB Male 25Pin 叉卯  |
| UNIT :mm        |           |                        |  宏揚精密有限公司<br>HOJAR PRECISION CO. : LTD. |

VERSION

A

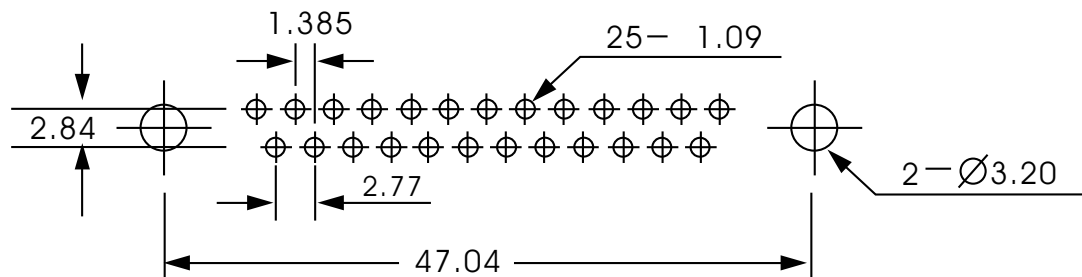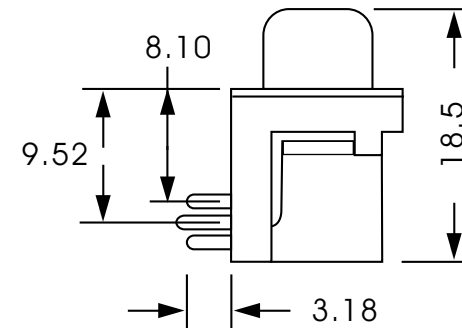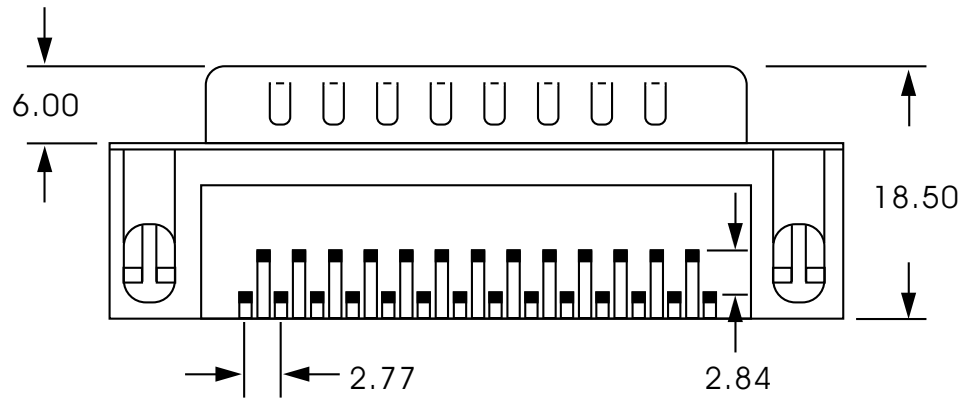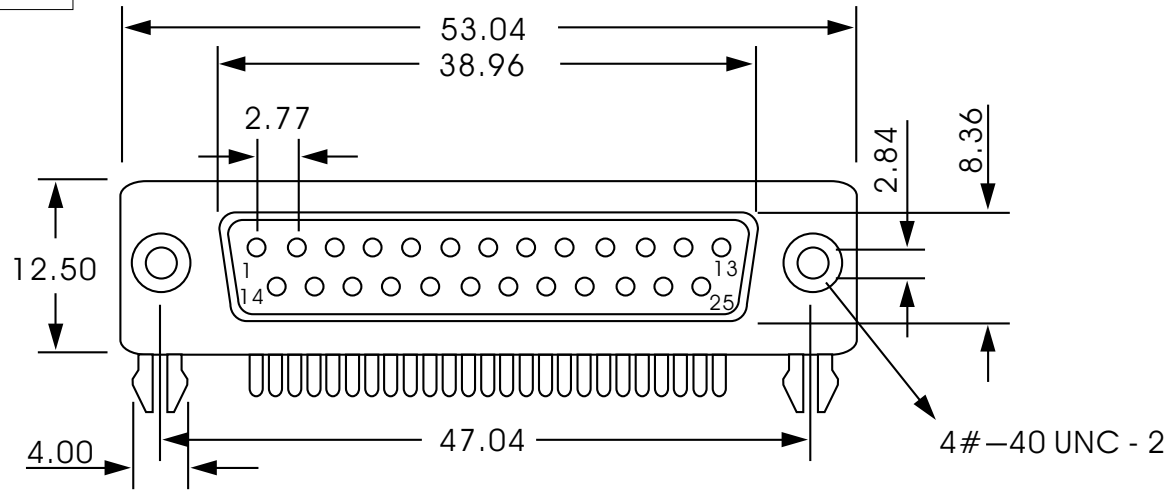

### P.C.B LAYOUT

|  |                                     |  |
|--|-------------------------------------|--|
| GENERAL TOLERANCE<br>.X ± 0.5<br>.XX ± 0.30<br>.XXX ± X.XX | DRAW DATE<br>2005/02/25<br>H. D. LI | PART NO<br>MDSUB - 25 2 - X  |
|  | DESIGN<br>H. D. LI                  | TITLE<br>D-SUB Male 25Pin 叉卯   |
|  | CHECKED<br>Y. M. LU                 |  |
| UNIT :mm   | APPROVED<br>J. F. KANG              |  宏揚精密有限公司<br>HOJAR PRECISION CO. : LTD. |