

SPECIFICATIONS

Current Rate: 5 Amps
 Insulator Resistance : 1000M Ω Min at 500V DC
 Dielectric Strength : 1000V Per minute
 Operation Temperature : -55°C ~ +105°C

MATERIAL


Insulator : P.B.T +30% Brass Fiber (UL94V-0)
 Contact : Brass
 Contact Plated : Gold Over Nickel
 Shell : Steel, Zinc plated or Tin plated





ORDER INFORMATION:

FDSUB - 15 2 - $\frac{X}{a}$


- a. Pack :
- D : Disk Pack

VERSION & EC DESCRIPTION			
DATE	VERSION	PAGE	DESCRIPTION
2005/02/24	A	12-13	Add FDSUB - 15 2 - X Plan

GENAL TOLERANCE .X ± 0.5 .XX ± 0.30 .XXX ± X.XX	DRAW 2005/02/24 DATE H. D. LI	PART NO FDSUB - 15 2 - X
	DESIGN H. D. LI	TITLE D-SUB Female 15Pin 叉卯
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.

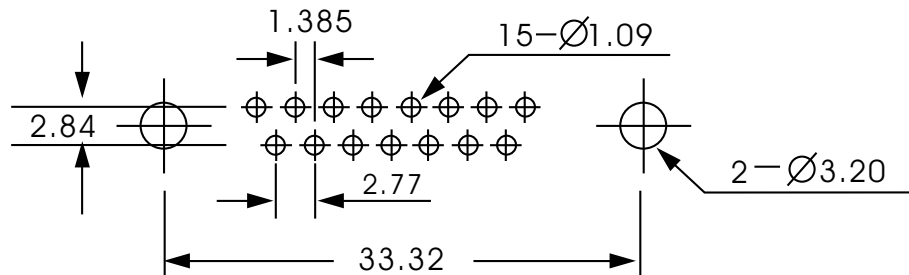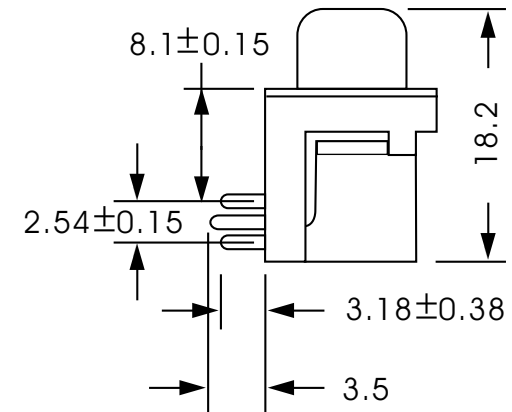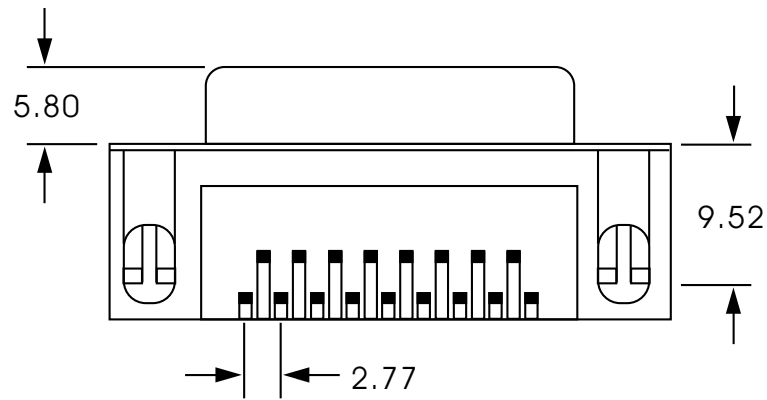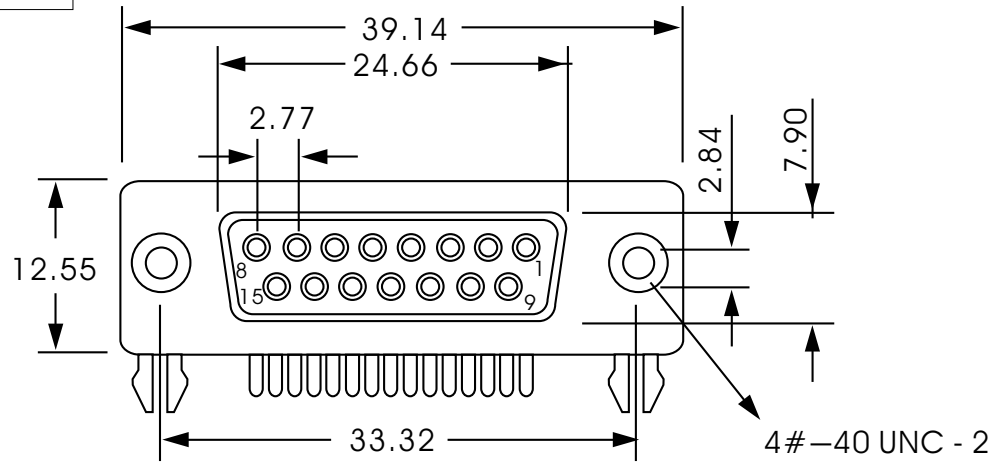

P.C.B LAYOUT

GENERAL TOLERANCE .X ± 0.5 .XX ± 0.30 .XXX $\pm X.XX$	DRAW DATE 2005/02/24 H. D. LI	PART NO FDSUB - 15 2 - X
	DESIGN H. D. LI	TITLE D-SUB Female 15Pin 叉卯
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO. : LTD.