

ORDER INFORMATION:

DFDSUB - 15 1 -  $\frac{X}{a}$


a. Pack :  
D : Disk Pack



MATERIALS

- 1.HOUSING:THERMOPLASTIC (UL94V-0).
- 2.TERMINAL:COPPER ALLOY.
- 3.SHELL:STEEL.




SPECIFICATION

- 1.CURRENT RATING: 5 AMP. MAX.
- 2.DIELECTRIC WITHSTANDING VOLTAGE:  
1000V AC R.M.S. FOR ONE MINUTE.
- 3.INSULATION RESISTANCE:1000M OHMS MIN. AT 500V DC.
- 4.CONTACT RESISTANCE:30m OHMS MAX.
- 5.OPERATING TEMPERATURE:-55°C TO +105°C.
- 6.DURABILITY:500 CYCLES.
- 7.MAX.PROCESSING TEMPERATURE:  
230°C FOR 30~60 SECONDS.(HI.-TEMP.PLASTIC)

GENAL TOLERANCE .X ± 0.5 .XX ± 0.30 .XXX ± X.XX	DRAW H. D. LI	PART NO DFDSUB - 151 - X
	DESIGN H. D. LI	TITLE D-SUB 三排15母雙層19.05 又鉚半金5.08 矮腳縮9
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.
UNIT :mm		

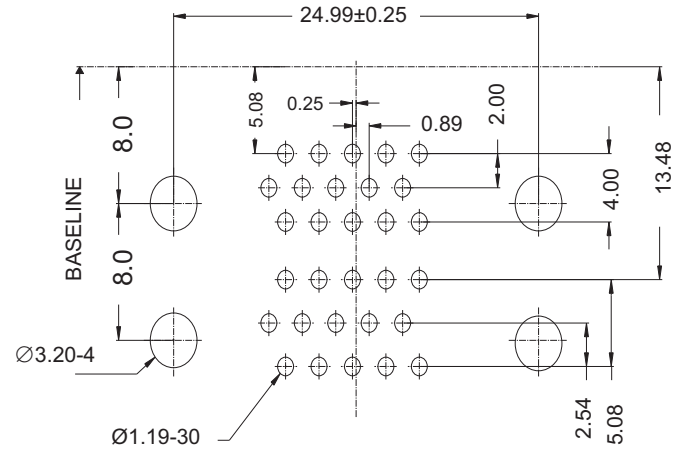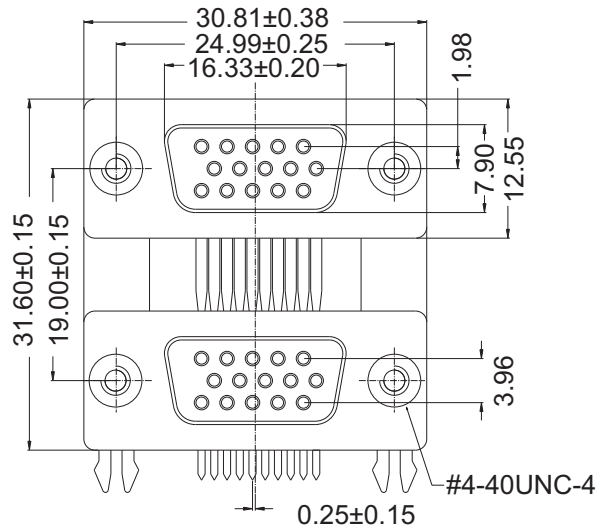

RECOMMEND P.C.B. LAYOUT  
BOTTOM VIEW

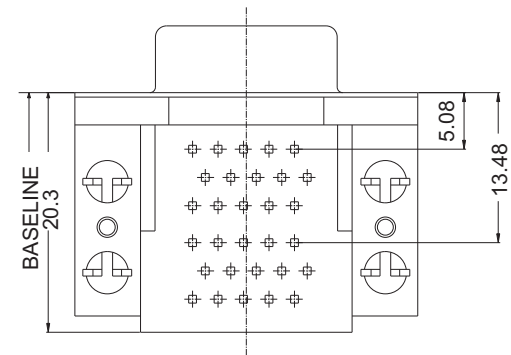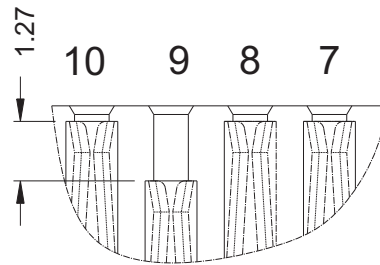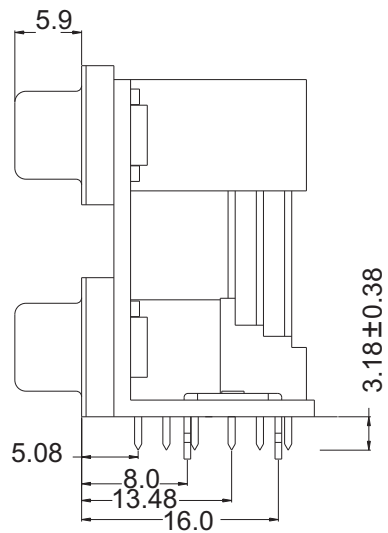

GENERAL TOLERANCE .X ± 0.5 .XX ± 0.30 .XXX ± X.XX	DRAW H. D. LI	PART NO DFDSUB - 151 - X
	DESIGN H. D. LI	TITLE D-SUB 三排15母雙層19.05 叉脚半金5.08 矮脚縮9
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm		宏揚精密有限公司 HOJAR PRECISION CO., LTD.