

ORDER INFORMATION:

FDMDSUB - $\frac{XX}{a}$ / $\frac{XX}{b}$ A - $\frac{X}{c}$ $\frac{X}{d}$ - $\frac{X}{e}$

NOTES:

1. MATERIL
 - 1.1 INSULATOR:PBT+25%G.F (UL94-V-0)
 - 1.2 CONTACT:BRASS.T=0.2 C2680-SH
 - 1.3 SHELL:COLD ROLLER STEEL T=0.4,
2. FINISH
 - 2.1 CONTACT:
 - 100 μ " TIN UNDERPLATED ENTIRE THE CONTACT SURFACE.
 - 1 μ " MIN Au PLATED ON THE CONTACT AREA
 - 2.2 SHELL:
 - 100 μ " NICKEL UNDERPLATED ENTIRE THE SHELL SURFACE.
3. ENVIRONMENTAL
 - 3.1 OPERATING TERMPERTURE:-55°C~+105°C
4. ELECTRICAL
 - 4.1 CONTACT CURRENT RATING:5Amp
 - 4.2 DIELECTRIC WITHSTANDING:AC 1000V min.per minute
 - 4.3 INSULATION RESISTANCE:>5000 MOHMS min.at 500V DC
 - 4.4 CONTACT RESISTANCE:25 MOHMS MAX
 - 4.5 CONTACT INSERTION FORCE: 5kg MAX
 - 4.6 CONTACT SEPTATION FORCE: 60g/PIN MIN.

a. Female Pin of numbers:

25

b. Male Pin of numbers:

09

c. Female color :


P : Purple





d. Male color:

G : Green


f. Pack selection:

D : Disk pack

GENAL TOLERANCE .X ±0.5 .XX ±0.30 .XXX ±X.XX	DRAW H. D. LI	PART NO FDMDSUB - XX/XX A -XX-X
	DESIGN H. D. LI	TITLE D-SUB三合一25母雙9公叉鉚半金
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

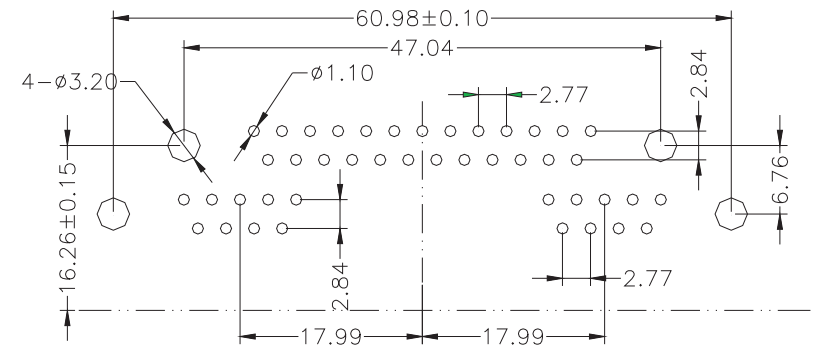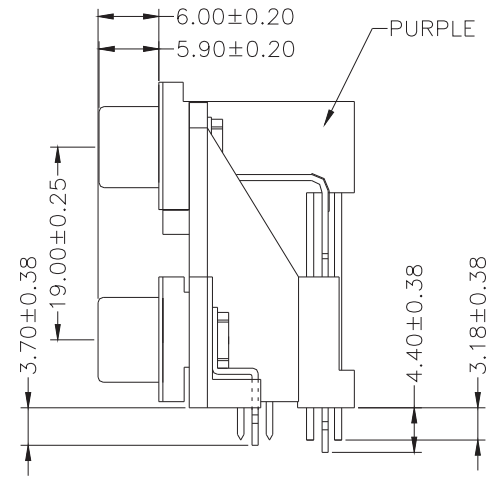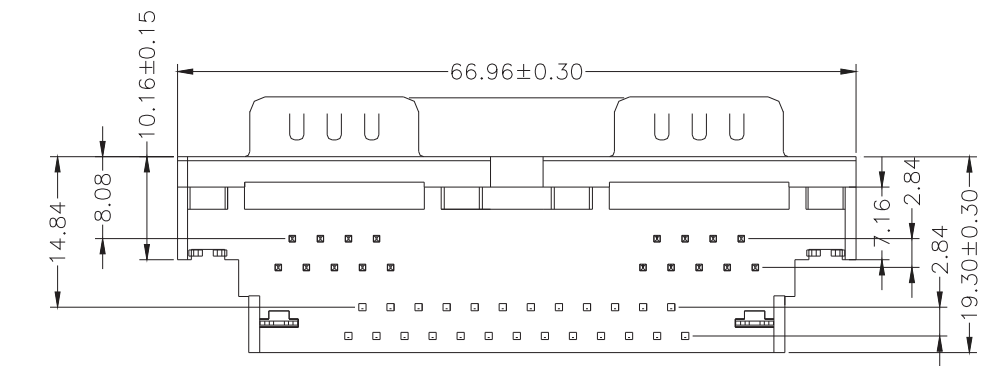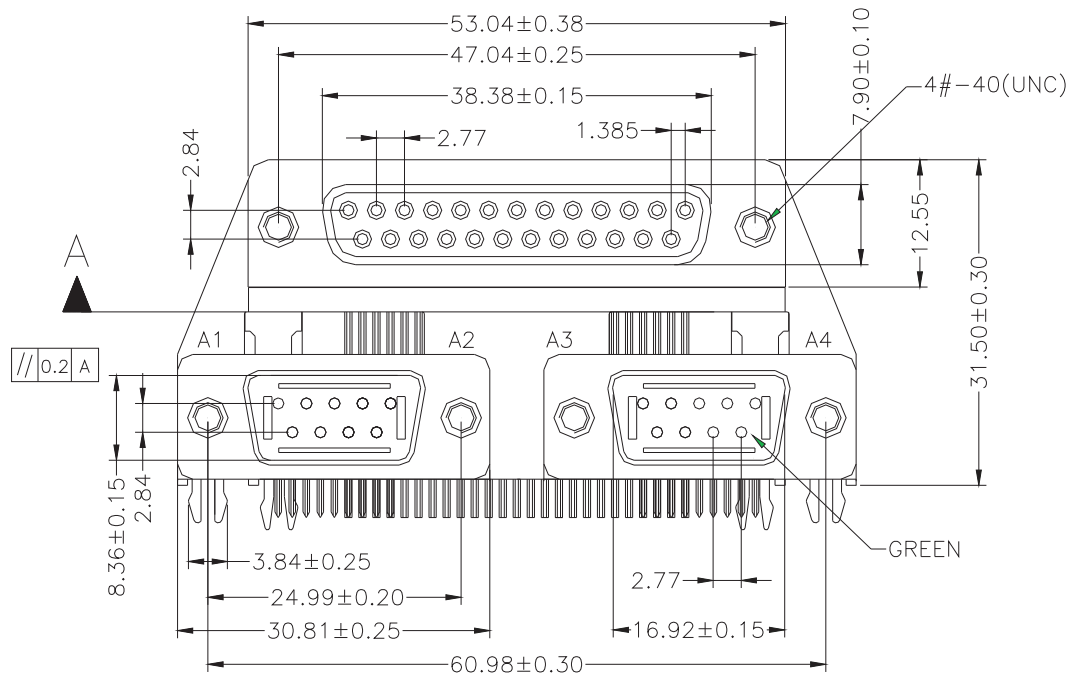

P.C.B LAYOUT

GENAL TOLERANCE .X ±0.5 .XX ±0.30 .XXX ±X.XX	DRAW H. D. LI	PART NO FDMDSUB - XX/XX A -XX-X
	DESIGN H. D. LI	
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.