

VERSION
A

ORDER INFORMATION:

MDSUB - 153- H/D - $\frac{X}{a} \frac{X}{b} - \frac{X}{c}$

NOTES:

1.MATERIAL

- 1.1 Insulator:PBT+30%Glass Fiber (UL94V-0)
- 1.2 Contact: Brass
- 1.3 Contact Plated:Gold
- 1.4 Shell:Steel Gold Plated
- 1.5 Screw: Brass ,Nickel Plated

2.SPECIFICATION

- 2.1 Current Rate:5 Amps
- 2.2 Insulator Resistance:5000MΩ Min. at 500V DC
- 2.3 Dielectric Strength:1000V Per minute
- 2.4 Operation Temperature:-55C to+105C

a.INSULATOR COLOR:


- 1 : BLACK
- 2 : BLUE (661C)






b. INSULATOR MATERIAL


P : PBT

c. Pack :

D : Disk Pack

GENAL TOLERANCE .X ± 0.5 .XX ± 0.30 .XXX ± X.XX	DRAW 2005/02/25 DATE H. D. LI	PART NO MDSUB-153-H/D-XX-X
	DESIGN H. D. LI	TITLE D-SUB Male 15Pin 铆附全金 3.18
CHECKED Y. M. LU	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO.,LTD.
UNIT :mm		

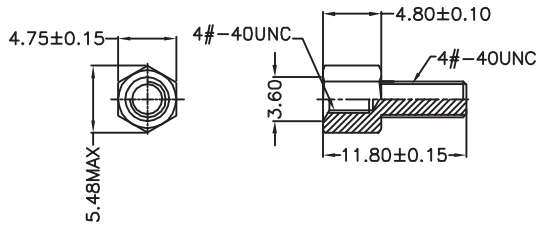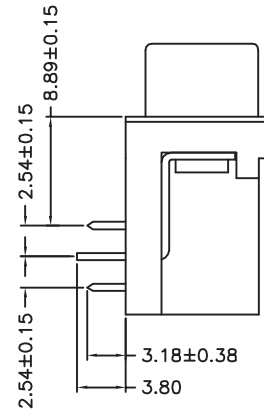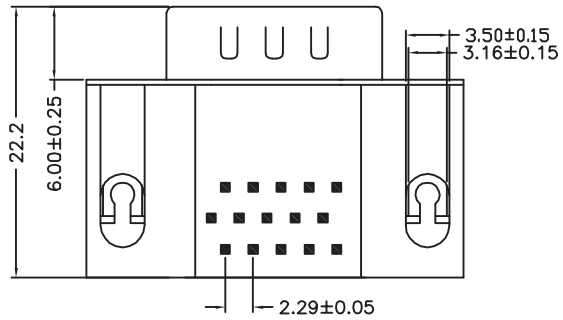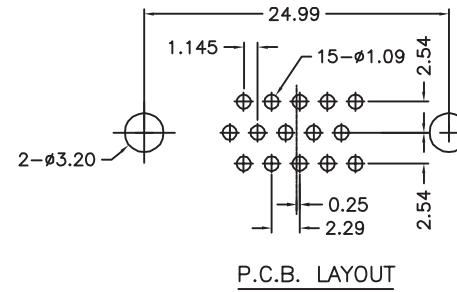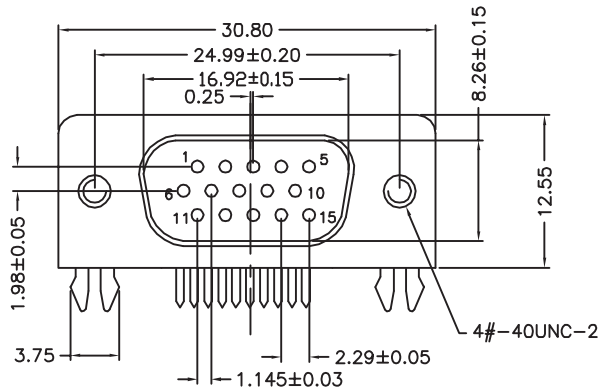

GENERAL TOLERANCE .X ± 0.5 .XX ± 0.30 .XXX ± X.XX	DRAW DATE	2005/02/25 H. D. LI	PART NO MDSUB-153-H/D-XX-X
	DESIGN	H. D. LI	TITLE D-SUB Male 15Pin 鍍附全金 3.18
	CHECKED	Y. M. LU	
	APPROVED	J. F. KANG	
UNIT :mm			 宏揚精密有限公司 HOJAR PRECISION CO., LTD.