

ORDER INFORMATION:

MDSUB070 -  $\frac{XX}{a}$  A -  $\frac{X}{b}$   $\frac{X}{c}$  -  $\frac{X}{d}$  P - D

**MATERIAL**

**INSULATOR:PBT+30%GLASS FIBER(UL94V-0)**

**CONTACT:PHOSPHOR BRONZE OR BRASS**

**(STANDARD IS BRASS)**

**CONTACT PLATED GOLD OVER NICKEL**

**SHELL:STEEL,ZINC PLATED OR TIN PLATED**

**SPECIFICATION**

**CURRENT RATE:5 AMPS**

**INSULATOR RESISTANCE:1000MΩ MIN.AT 500V DC**

**CONTACT RESISTANCE:20MΩ MAX.**

**DIELECTRIC STRENGTH:500V PER MINUTE**

**OPERATION TEMPERATURE:-55°C TO +105°C**

a. Pin of numbers:

9、15、19、23、25、37

b. Shell Plating:

T: Tin

N: Nickel

Z: Zinc

c. DIMENSION OF "X":


A: 7.2



B: 9.4

d. Housing Color:

B: BLACK


W: WHITE

GENERAL TOLERANCE	DRAW DATE	2005/02/25 H. D. LI	PART NO
XX ± 0.5	DESIGN	H. D. LI	MDSUB070 -XXA -XX-XP-D
.X ± 0.25	CHECKED	Y. M. LU	TITLE
.XX ± 0.10	APPROVED	J. F. KANG	D-SUB Male R/A MACHINED PIN
.XXX ± 0.04	UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

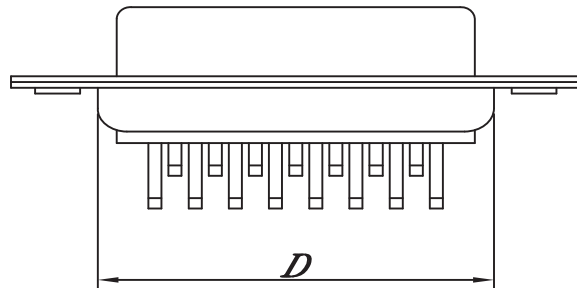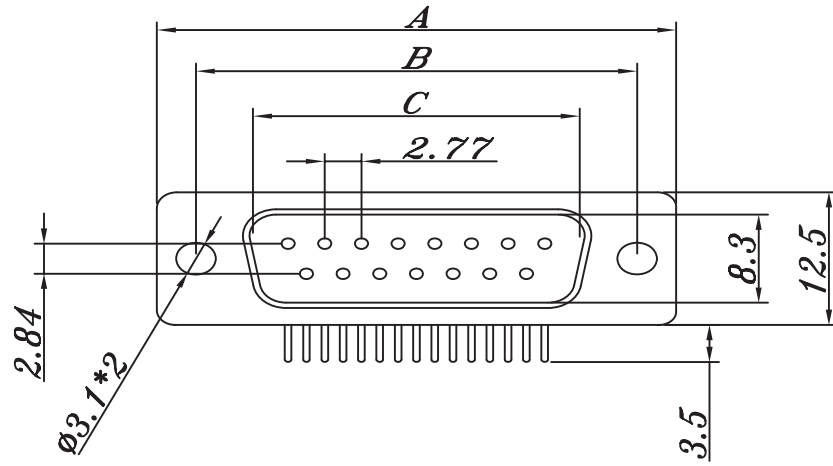


### DIMENSION OF "X"

<i>A</i>	<i>B</i>
7.2	9.4

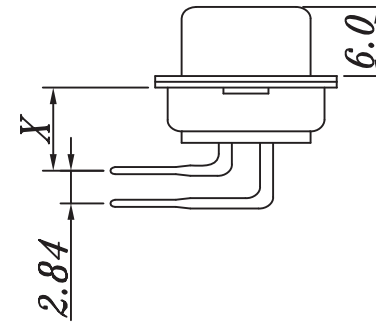

POSITION	<i>A</i>	<i>B</i>	<i>C</i>	<i>D</i>
9	30.8	25.00	16.30	19.2
15	39.2	33.30	24.60	27.7
19	44.8	38.86	30.00	32.8
23	50.3	44.30	35.30	38.3
25	53.1	47.10	38.30	41.1
37	69.4	63.50	54.80	57.3

GENERAL TOLERANCE XX ± 0.5 .X ± 0.25 .XX ± 0.10 .XXX ± 0.04	DRAW DATE 2005/02/25 H. D. LI	PART NO MDSUB070-XXA-XX-XP-D
	DESIGN H. D. LI	TITLE D-SUB Male R/A MACHINED PIN
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.