

ORDER INFORMATION:

MATERIAL


Insulator:PBT+30%Glass Fiber (UL94V-0)
 Contact: Brass
 Contact Plated:Gold or Tin Plated
 Shell:Steel,Nickel Plated
 Screw: Brass ,Nickel Plated



SPECIFICATION

Current Rate:5 Amps
 Insulator Resistance:5000M Ω Min. at 500V DC
 Dielectric Strength:1000V Per minute
 Operation Temperature:-55°C to+105°C




FDSUB - 153 - H/D $\frac{-X-}{a}$ $\frac{X}{b}$ $\frac{X}{C}$ $\frac{-X}{d}$


- a. 螺絲 :
 0:無附螺絲
 1:有附螺絲
- b. Plastic Color :
 1:全金藍
 2:半金藍
 3:全金黑
 4:半金黑
- c. Plastic Material :
 P:PBT
- d. Pack :
 D : Disk Pack

GENAL TOLERANCE .X ± 0.5 .XX ± 0.30 .XXX ± X.XX ANG ± 2°	DRAW 2005/02/24 DATE H. D. LI	PART NO FDSUB-153-H/D-X-XX-X
	DESIGN H. D. LI	TITLE HDD15P8.89母卯附半(全)金黑(藍) 3.18
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

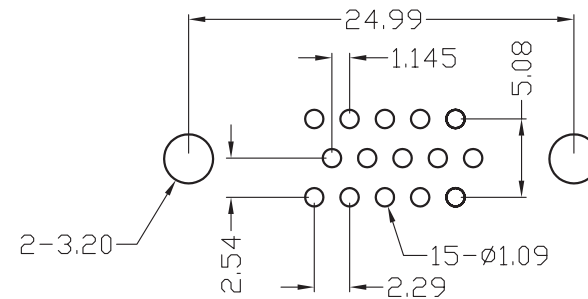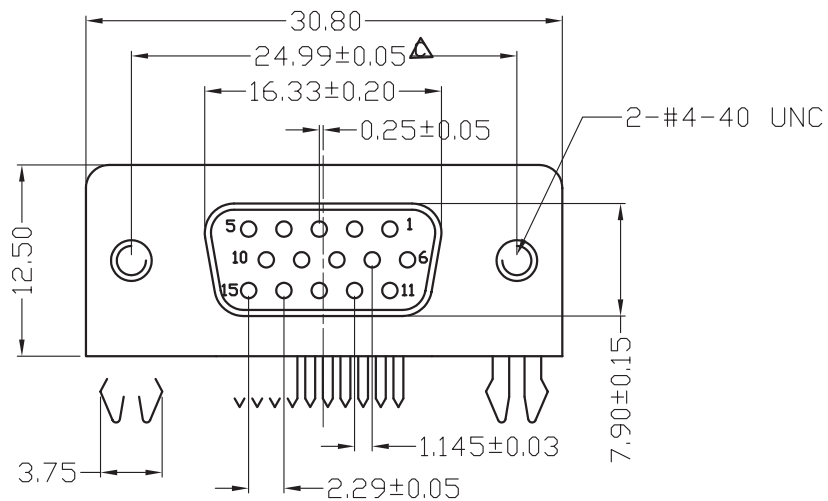

P.C.B. LAYOUT

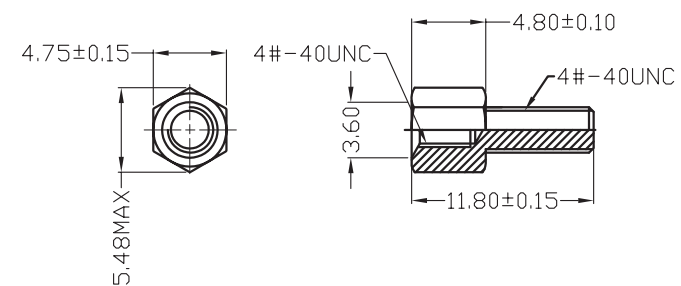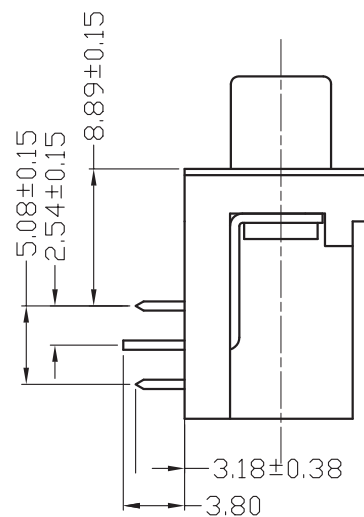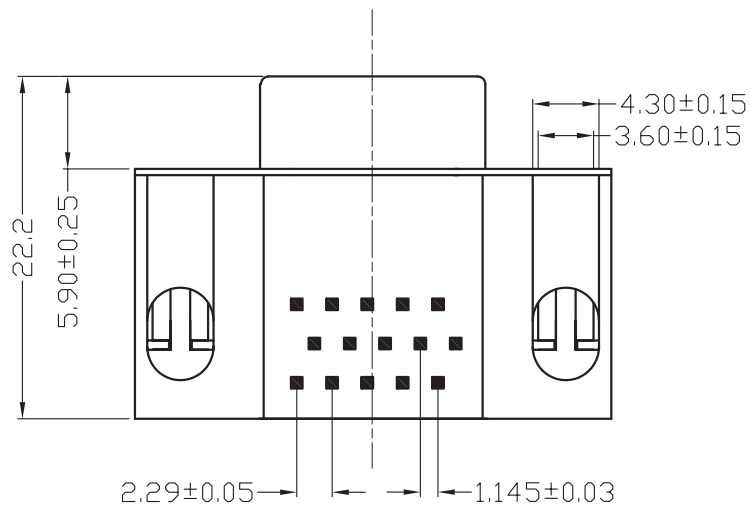

GENERAL TOLERANCE .X ± 0.5 .XX ± 0.30 .XXX $\pm X.XX$ ANG $\pm 2^\circ$	DRAW DATE 2005/02/24 H. D. LI	PART NO FDSUB-153-H/D-X-XX-X
	DESIGN H. D. LI	TITLE HDD15P8.89母卯附半(全)金黑(藍) 3.18
	CHECKED Y. M. LU	
UNIT :mm	APPROVED J. F. KANG	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.