

ORDER INFORMATION:

FDSUB070 - $\frac{XX}{a} A - \frac{X}{b} \frac{X}{c} - \frac{X}{d} P - D$

MATERIAL

INSULATOR:PBT+30%GLASS FIBER(UL94V-0)

CONTACT:PHOSPHOR BRONZE OR BRASS

(STANDARD IS BRASS)

CONTACT PLATED GOLD OVER NICKEL

SHELL:STEEL,ZINC PLATED OR TIN PLATED

SPECIFICATION

CURRENT RATE:5 AMPS

INSULATOR RESISTANCE:1000MΩ MIN.AT 500V DC

CONTACT RESISTANCE:20MΩ MAX.

DIELECTRIC STRENGTH:500V PER MINUTE

OPERATION TEMPERATURE:-55°C TO +105°C

a. Pin of numbers:

9、15、19、23、25、37

b. Shell Plating:

T: Tin

N: Nickel

Z: Zinc

c. DIMENSION OF "X":


A: 7.2



B: 9.4

d. Housing Color:

B: BLACK


W: WHITE

GENAL TOLERANCE	DRAW DATE	2005/02/25 H. D. LI	PART NO
XX ± 0.5	DESIGN	H. D. LI	FDSUB070 -XXA -XX-XP-D
.X ± 0.25	CHECKED	Y. M. LU	TITLE
.XX ± 0.10	APPROVED	J. F. KANG	D-SUB Female R/A MACHINED PIN
.XXX ± 0.04	UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

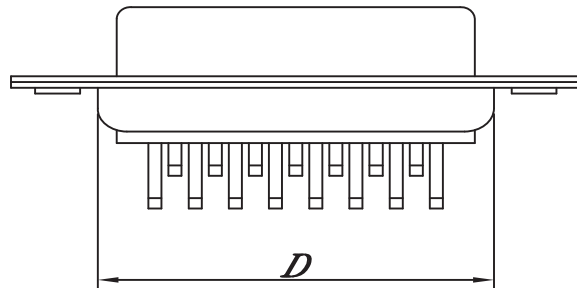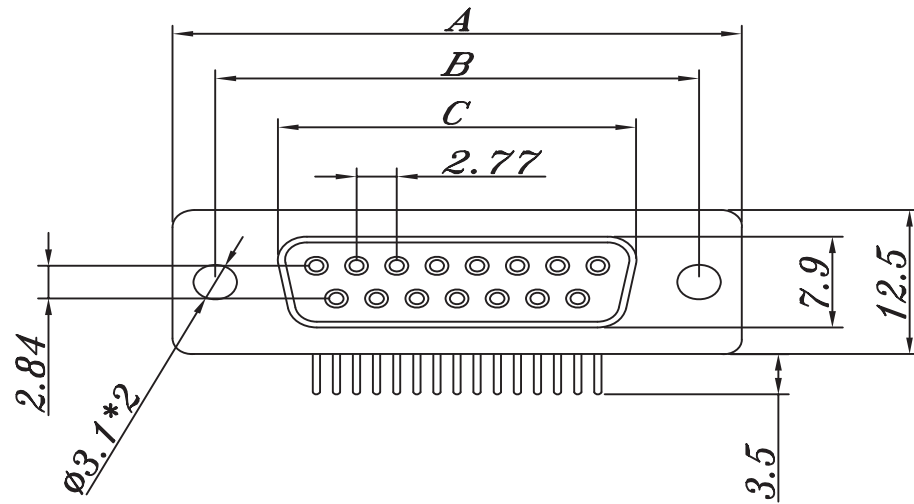


DIMENSION OF "X"

<i>A</i>	<i>B</i>
7.2	9.4

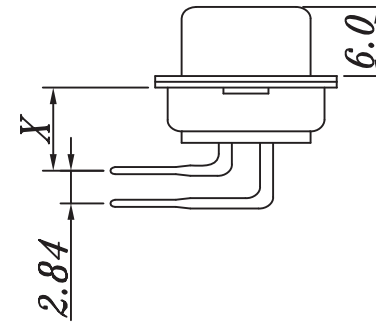

POSITION	<i>A</i>	<i>B</i>	<i>C</i>	<i>D</i>
9	30.8	25.00	16.30	19.2
15	39.2	33.30	24.60	27.7
19	44.8	38.86	30.00	32.8
23	50.3	44.30	35.30	38.3
25	53.1	47.10	38.30	41.1
37	69.4	63.50	54.80	57.3

GENAL TOLERANCE XX ± 0.5 .X ± 0.25 .XX ± 0.10 .XXX ± 0.04	DRAW 2005/02/25 DATE H. D. LI	PART NO FDSUB070 -XXA -XX-XP-D
	DESIGN H. D. LI	TITLE D-SUB Female R/A MACHINED PIN
	CHECKED Y. M. LU	
	APPROVED J. F. KANG	
UNIT :mm	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.	