


# ORDER INFORMATION:


MD2 - 5 10 D- S1 - B P - D  
 a b c d e f

- a. Shell option:  
5:FULLY SHIELDED WITH STRAIGHT TABS
- b. Position:  
10
- c. S1: Spring H=13.0mm
- d. Color selection:  
B:Black
- e. Insulator material:  
P:PBT
- f. Pack selection:  
D:Disk Pack

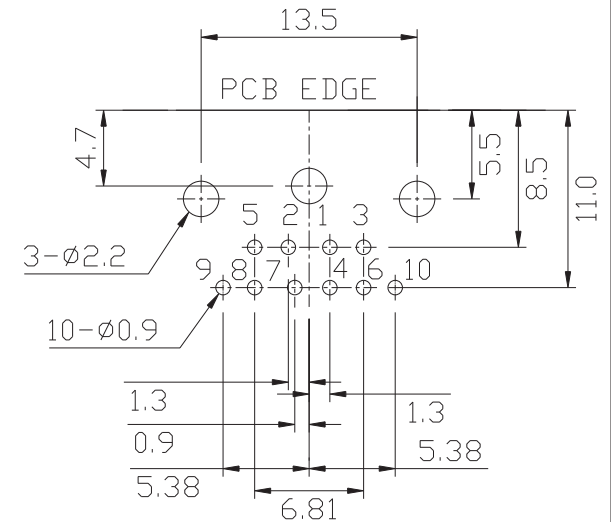

P.C.B. RECOMMEND LAYOUT  
 BOTTOM VIEW

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	PBT G.F.	BLACK	1	
2	CONTACT	PHOS. BRONZE T:0.2	GOLD-TIN PLATED	8	Gold:1~3u"; NI:40~60u"; TIN:120u" (100% pure Tin of lead free plating)
3	SHIELD	BRASS T:0.3	TIN PLATED	1	TIN:120~200u"
4	BOTTOM COVER	PBT G.F.	BLACK	1	
5	HARPOON	BRASS T:0.4	GOLD-TIN PLATED	2	Gold:1~3u"; NI:40~60u"; TIN:120u" (100% pure Tin of lead free plating)
6	SPRING SHIELD	STAINLESS T:0.2		1	

GENERAL TOLERANCE  ± 0.30	DATE	H. D. LI	PART NO <b>MD2-510D-S1-BP-D</b>
	DESIGN	H. D. LI	
	CHECKED	Y. M. LU	 宏揚精密有限公司 HOJAR PRECISION CO., LTD.
	APPROVED	J. F. KANG	
UNIT :mm			